

# W15L100-POB2

## 14.9" Multi-Touch Open Frame Display



### KEY FEATURES


- 14.9" 1920 x 720 Resolution
- VGA input and HDMI input
- Open frame
- Projected Capacitive Multi-Touch



### SPECIFICATIONS

| Display             |  |                       |  |
|---------------------|--|-----------------------|--|
| Type                | Projected Capacitive Multi Touch   | Resolution            | 1920x720   |
| Size                | 14.9 inches  | Contrast Ratio        | 1000:1   |
| Panel Brightness    | 950.0 nits   | Display Color         | 16.7M Colors   |
| View Angles         | 85,85,85,85  | Active Area           | 355.68×133.38 mm                                     |
| Environment         |  |                       |  |
| Operating Humidity  | 10% to 90% RH, Non-Condensing  | Operating Temperature | 0°C to 50°C  |
| Storage Temperature | -10°C to 60°C  |                       |  |
| Certification       |  |                       |  |
| Certification       | CE, FCC  |                       |  |
| IO Ports            |  |                       |  |
| USB Port            | 1 x USB for Touch Screen   | Video                 | 1 x VGA<br>1 x HDMI (Optional)<br>1 x DVI (Optional) |
| Audio               | Audio line in (3.5mm) (Optional)<br>2 x Speaker (Optional)   |                       |  |
| Mechanical          |  |                       |  |
| Dimension           | 407 x 178 x 59 mm  | Mounting              | Panel Mount  |
| Enclosure           | Metal  | Cooling System        | Fanless Design                                       |
| Accessory           |  |                       |  |
| Accessory           | 1 x VGA cable<br>1 x HDMI cable<br>100~240V AC to DC Adapter<br>Power Cord<br>Manual<br>VESA screws(Varies by product) | Optional Accessory    | Remote Controller (Optional,Varies by product)       |
| Power               |  |                       |  |
| Power Rating        | 12V DC in<br>24V DC in (optional)  |                       |  |
| Control             |  |                       |  |
| Button              | 5 Keys: -, +, Power, Esc, Enter  |                       |  |

## DIMENSIONS UNIT:MM

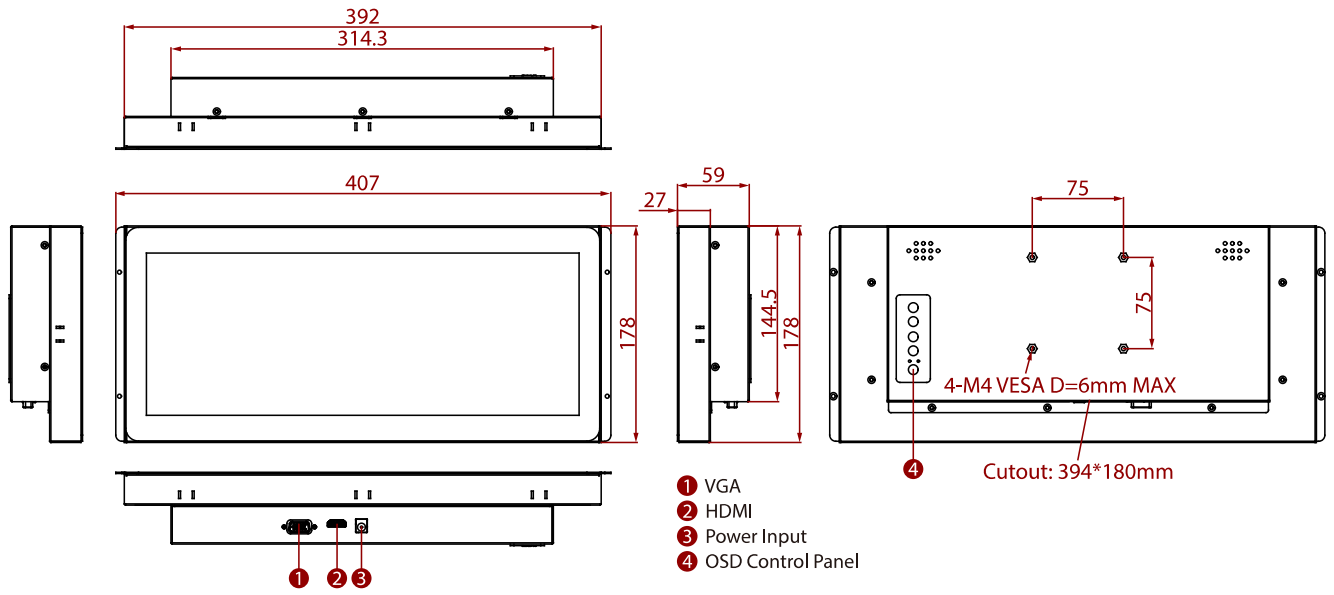

## NOTE

- 1.This is a simplified drawing and some components are not marked in detail.
- 2.Please contact our sales representative if you need further product information.
- 3.All specifications are subject to change without prior notice.
- 4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.