

W27IAD3S-PCA1

27" Intel® Core™ i5-1235U PCAP Standalone HMI Panel PC



KEY FEATURES

- Intel® 12th Generation Core™ i5-1235U Processor
- 1920 x 1080 Resolution
- Projected capacitive multi-touch screen
- Multi display supports HDMI / LVDS / eDP panel interface
- Multiple I/Os, 2 x Serial Ports, 2 x USB 3.2 Gen2x1 Ports
- A true flat, easy-to-clean front surface with edge-to-edge design
- Front IP65 water and dust proof
- Aluminum housing
- 12V Single Voltage Power Input




SPECIFICATIONS

| Display | | | |
|----------------------------|---|------------------------------|---|
| Resolution | 1920x1080 | Size | 27.0 inches |
| Contrast Ratio | 3000:1 | Panel Brightness | 300.0 nits |
| View Angles | 89,89,89,89 | Active Area | 599x337 mm |
| Touch / Glass | Projected Capacitive Multi Touch Screen | | |
| System Specification | | | |
| WLAN | Support (Optional) | BT | Support (Optional) |
| Processor | Intel® Core™ i5-1235U 3.3GHz(up to 4.40 GHz) | Memory | 1 x SO-DIMM, DDR5 4800 MHz, 8GB 16GB (Optional) 32GB (Optional) |
| Storage | 1 x M.2 2280 M-Key NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB (Optional) 2TB (Optional) 4TB (Optional) 1 x SATA III for 2.5" SSD/HDD up to 2TB (Optional) | Ethernet controller | 2 x Intel® Ethernet Controller |
| Security | TPM 2.0 | Operating System | Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional) |
| Mechanical | | | |
| Dimension | 675.4 x 413.4 x 48 mm | Weight | 10.2 kg |
| Mounting | VESA Mount | Enclosure | Metal Housing |
| Cooling System | Fanless design | | |
| Environment | | | |
| Operating Humidity | 10% to 90% RH, Non-Condensing | Operating Temperature | 0°C to 50°C |
| Storage Temperature | -10°C to 60°C | IP rating | Front IP65 |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |

| | | | |
|-----------------------|--|-----------------|-----------------------------|
| Power Input | 1 x 12V DC, 2.5φ DC jack | USB Port | 2 x USB3.2 Gen2x1 (Type-A) |
| Serial Port | 1 x RS232/422/485 (Default RS232) 1 x RS232 | Video | 1 x HDMI 2.0 (Optional) |
| Expansion Port | 1 x M.2 2280 M-Key Slot (for NVME SSD) 1 x M.2 2230 E-Key Slot (for Wi-Fi module) | LAN | 2 x Giga LAN RJ45 Connector |
| Control | | | |
| Button | 1 x Power Button 1 x Reset Button | | |
| Accessory | | | |
| Accessory | 100~240V AC to DC Adapter Power Cord VESA screws | | |
| Power | | | |
| Power Rating | 12V DC | Adapter | 12V 120W |

DIMENSIONS UNIT:MM

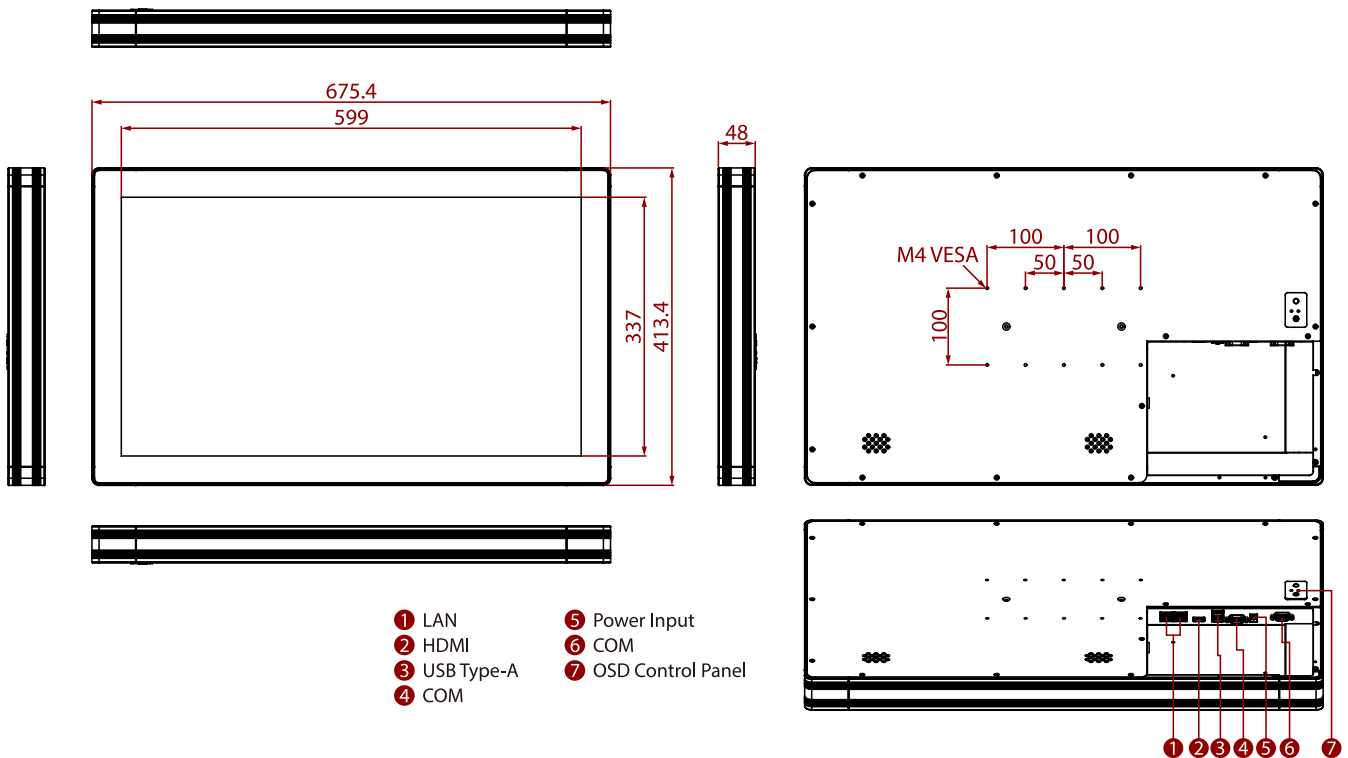

NOTE

- 1.This is a simplified drawing and some components are not marked in detail.
- 2.Please contact our sales representative if you need further product information.
- 3.All specifications are subject to change without prior notice.
- 4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.