

R19IHAT-66EX

19" Intel® Core™ i5/i7 ATEX Panel PC



KEY FEATURES

- 19" 1000 nits LCD ATEX Panel PC
- Class 1, Division 2 & ATEX Zone 2 certified for hazardous area applications
- Intel® Haswell Core™ i5-4300U(Optional i7-4650U)
- Fanless design with streamlined enclosure for highly efficient heat dissipation
- Intelligent Heater for working in extreme cold environments -40°C

INTRODUCTION

Discontinued

SPECIFICATIONS

System Specification

Processor	Intel Core i5-4300U 1.9GHz (up to 2.9GHz) Intel Core i7-4650U 1.7GHz (up to 3.3GHz) (Optional)	Memory	1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
Storage	1 x mSATA SSD 128GB 256GB (Optional) 512GB (Optional) 1 x SATA III for 2.5" SSD/HDD (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 1.2	Operating System	Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional)

Display

Touch / Glass	Projected Capacitive Multi Touch Screen Bonding With Panel	Resolution	1280x1024
Size	19.0 inches	Contrast Ratio	1000:1
Panel Brightness	1000.0 nits	View Angles	85,85,80,80
Active Area	376.32x301.06 mm		

Mechanical

Dimension	474 x 410 x 111 mm	Weight	9.8 kg
Mounting	Panel mount	Enclosure	Aluminum Housing


Cooling System	VESA Mount Fanless design	Cut out	462 x 386 mm
Environment			
Operating Humidity	5% to 95% RH, Non-Condensing	Operating Temperature	-40°C to 70°C (with intelligent heater)
Storage Temperature	-40°C to 70°C	Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I	IP rating	IP66 Meet Standard IEC60529 (for Non-Hazardous location) IP54 Meet Standard IEC60079 (for Hazardous location)
Certification			
Certification	CE, FCC UL 60950-1 CSA C22.2 No. 60950-1-07 EN 62368-1 Class I, Div.2, Groups A,B,C,D T4 -40 <= Tamb <= 70 Meet Standards ANSI/ISA-12.12.01-2013 CSA Std. C22.2 No. 213-M1987 ATEX II 3G Ex nA ic IIC T4 Gc -40 <= Tamb <= 70 Meet Standards EN 60079-0, EN 60079-11, EN 60079-15 IECEx Ex nA ic IIC T4 Gc -40 <= Tamb <= 70 Meet Standards IEC 60079-0, IEC 60079-11, IEC 60079-15		
IO Ports			
Power Input	1 x 9~36V DC, 3-Pin Terminal Block	USB Port	1 x USB2.0, 4-Pin Terminal Block
Serial Port	1 x RS232/422/485, 10-Pin Terminal Block	Expansion Port	1 x mPCIe slot(for SATA III SSD) 1 x mPCIe slot(for Wi-Fi module)
LAN	1 x LAN, , 8-Pin Terminal Block	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage 1 x LED Indicator for heater 1 x LED Indicator for LAN 1 x LED Indicator for lock touch
Gland	2 x EX-Type Brass Cable Gland M16 (Cable range 7.5~10.2mm) 3 x EX-Type Brass Cable Gland M12 (Cable range 5.4~8mm)		
Control			
Button	1 x Power Button 1 x Brightness up Button 1 x Brightness down Button 1 x Button for locking touch function 1 x Programmable function key		
Accessory			
Accessory	24V 150W AC to DC Adapter Power cord Open wired power cable for M12 cable Gland Open wired USB cable for M12 cable Gland Open wired LAN/COM cable for M16 cable Gland VESA Mounting Screws Mounting Clips & Screws 3 Pins Terminal Block For Power 8 Pins Terminal Block For LAN 4 Pins Terminal Block For USB 10 Pins Terminal Block For COM	Optional Accessory	SMA male to female extension cable for M12 cable Gland (Optional)

DIMENSIONS UNIT:MM

NOTE

1. This is a simplified drawing and some

components are not marked in detail.
 2. Please contact our sales representative if you need further product information.
 3. All specifications are subject to change without prior notice.
 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

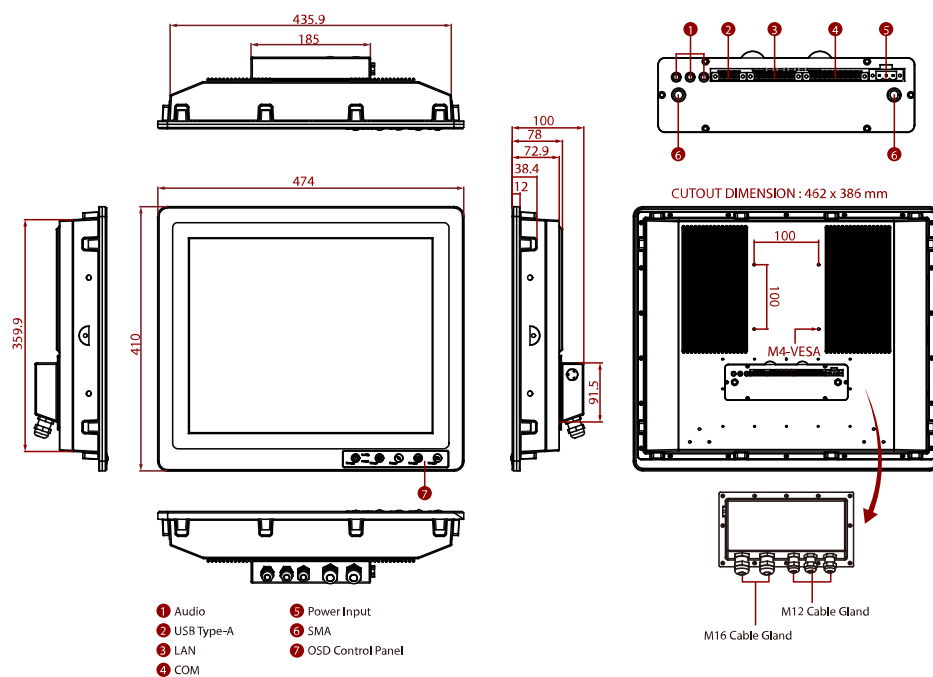

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.