

ULTIMATE  
PRODUCTIVITY IN A  
RUGGED FORM FACTOR

# MOBILE SOLUTIONS

RUGGED MOBILE COMPUTER

RUGGED TABLET PC

ULTRA RUGGED TABLET PC

VEHICLE MOUNT COMPUTER

MARKET READY SOLUTION



# MOBILE SOLUTIONS





# TABLE OF CONTENTS

## Introduction

- 1 Introduction
  - 9 Industries
  - 11 Product Highlights
- 

## Rugged Mobile Computer

- 19 Arm Rugged Mobile Computers 4.3"
  - 23 Arm Rugged Mobile Computers 5"
- 

## Rugged Tablet

- 29 Arm Rugged Tablet 7"
  - 31 x86 Rugged Tablet 8"
  - 35 Arm Rugged Tablet 8"
  - 37 x86 Rugged Tablet 10.1"
  - 41 Arm Rugged Tablet 10.1"
  - 43 x86 Rugged Tablet 11.6"
- 

## Ultra-Rugged Tablet

- 49 x86 Ultra-Rugged Tablet 8.4"
  - 53 x86 Ultra-Rugged Tablet 10.4"
  - 57 x86 Ultra-Rugged Tablet 13.3"
- 

## Vehicle Mounted Computer

### FM Series

- 63 Vehicle Mounted Computer 7"
- 67 Vehicle Mounted Computer 8"
- 69 Vehicle Mounted Computer 10.4"

### G-WIN VM Series

- 73 Vehicle Mounted Computer 10.1"~15"
  - 75 Vehicle Mounted Computer 7"~15"
  - 77 Vehicle Mounted Computer 8.4"
  - 79 Vehicle Mounted Computer 10.4"
  - 81 Vehicle Mounted Computer 12.1"
  - 83 Vehicle Mounted Computer 15"
- 

## Vertical Market

### ATEX

- 91 Arm ATEX Rugged Mobile Computer 4.3"
- 93 Arm ATEX Rugged Tablet PC 7"
- 95 x86 ATEX Rugged Tablet PC 10.1"
- 97 Arm ATEX Rugged Tablet PC 10.1"

### Healthcare

- 101 x86 Healthcare Rugged Tablet PC 10.1"
- 103 Arm Healthcare Rugged Mobile Computer

# Introduction

## About Winmate

Winate Inc. is a rugged computing and embedded solutions provider for industries operating in some of the most challenging environments. Founded in 1996 in Taipei, Taiwan where its headquarters, research and development facility, and production lines are located, today the company has offices and service centers worldwide.

Winate develops rugged industrial-grade computing solutions that advance the edge AI system, and Industrial Internet-of-Things (IoT). Industrial display and panel PC, HMI, embedded systems, IoT gateways to rugged tablets and handheld devices for industries ranging from transportation and logistics to marine and military, railway, oil and gas, smart grid, healthcare, and field services. Winate also provides professional services in customizing products and project management create a unique solution for specific customer's needs.

## Industry Solutions

Winate offers rugged computing solutions for vertical markets, including mobile solutions, embedded applications, industrial systems, vehicle-mounted computers, digital signage and medical solutions. Such huge range of solutions in various sectors indicates that Winate comes equipped with the know-how and competitive capabilities to outshine the market.

We also deliver pre- and after-sales services across the world at the same strict, high quality level, that is, you can count on us to get your back up always, wherever you are!



**Rugged Computing Solutions Tailored for Industrial Applications**

## Global Reach

Winate is at the forefront of technological innovation with its best in-class service offerings available around the globe. Service offices in the USA, Canada, Germany, China and Taiwan have made Winate be able to offer responsive, reliable and quick support on all of our products.



## The Winmate Difference

### Innovation and Ruggedness

Blending innovations and ruggedness, our products are designed to meet the requirements of vertical markets' environmental standards.

### Engineering Intelligence

We are committed to maintaining the highest standards in engineering excellence to ensure our products deliver reliability, durability, and optimized performance.

### Quality Commitment

Quality assurance and entire engineering processes are under go in-house. This is why we invested significantly in our state-of-the-art testing facility and offer global support.

“ **INNOVATIVE  
TECHNOLOGY FOR  
OPERATIONAL  
EXCELLENCE.** ”

### Efficiency

Our team is committed to efficiency and maintaining the shortest possible development cycles. From design to testing the whole development process undergoes in-house to achieve the market advantage in speed and quality.


### Reliability

Reliability, service and support are part of our foundation. Every product undergoes the scrutiny of industrial standards testing to verify electrical, mechanical, thermal, and firmware design performance.

## Customized Solutions

Years of experience allow Winmate to offer customized solutions for different applications. From product design to accessories, our engineering team designs and support the system integration process.

- CUSTOMIZED CONFIGURATION
- CUSTOM OS IMAGE
- CUSTOM BIOS
- ENCLOSURE DESIGN
- PERIPHERALS AND OPTIONS
- CUSTOM-DESIGNED ACCESSORIES

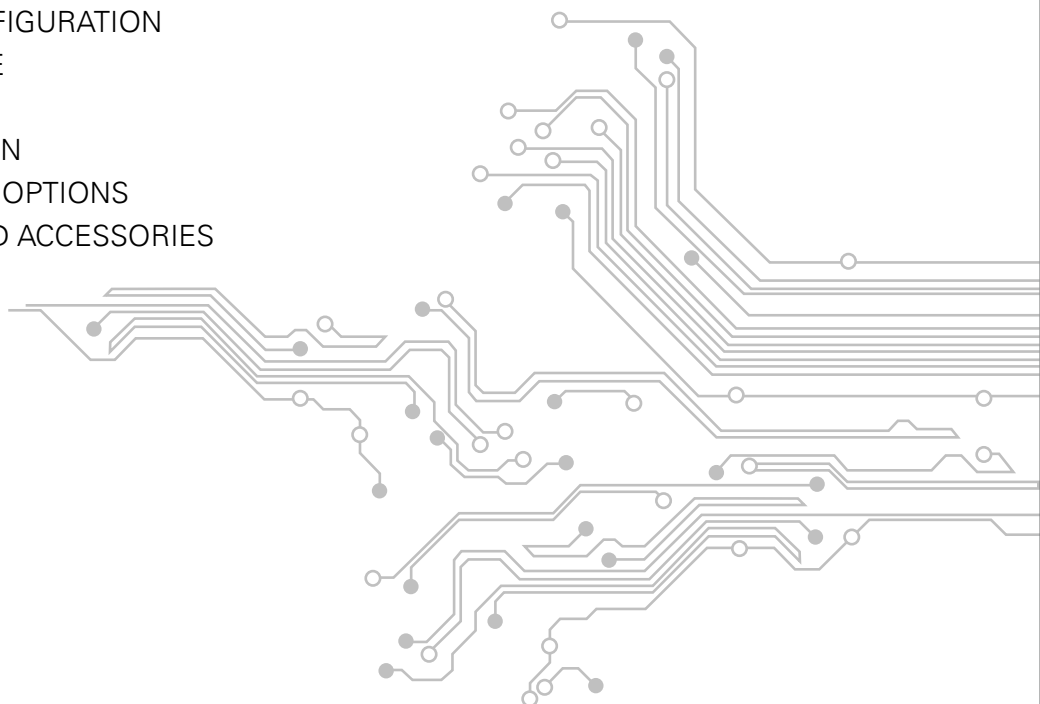




# Introduction


## Technical Know-How

We understand that, for enterprises operating in rugged or potentially hazardous environments, the access to the cutting-edge solutions purpose-built for their applications is imperative. As a result, Winmate locates its resources from project research and design, software development and customization, product verification and validation, to testing all in house in order to gain maximized freedom to research and implement the latest technologies available.

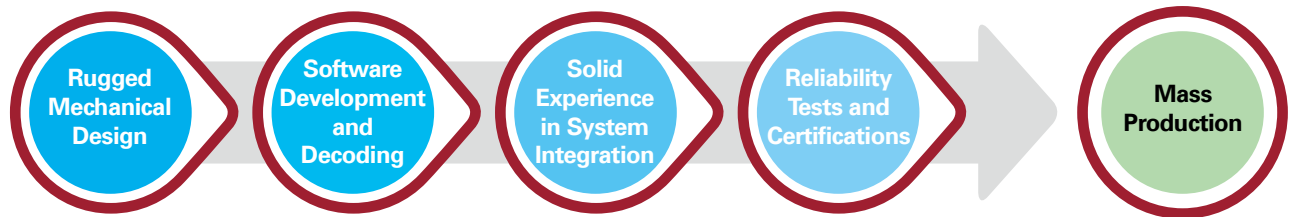


### The latest technologies we deploy for our rugged products:

- Dry and wet optical bonding
- Panel enhancement for sunlight readability
- Anti-reflection (AR) and anti-glare (AG) glass protection coating
- Light sensor
- Hyper dimming
- Electronic potting
- Touch screen integration: projected capacitive, resistive or SAW touch
- Waterproof enclosure
- Military EMI and mesh coating
- Wireless capabilities
- Data capture devices integration
- Defroster for ultra-low temperature environments
- 316 Stainless steel
- Shock and vibration resistance
- Wide-range operation temperature

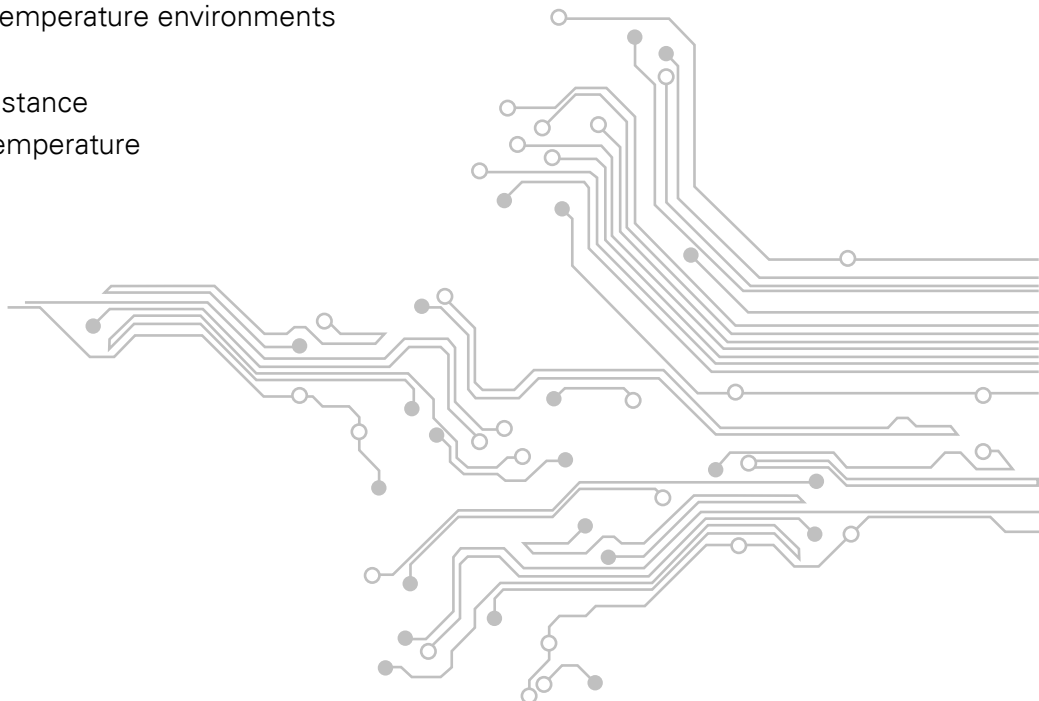

## Product Development Life Cycle

Winmate has total knowledge and control of the product's life cycle, from its conception and production in our factories to distribution:

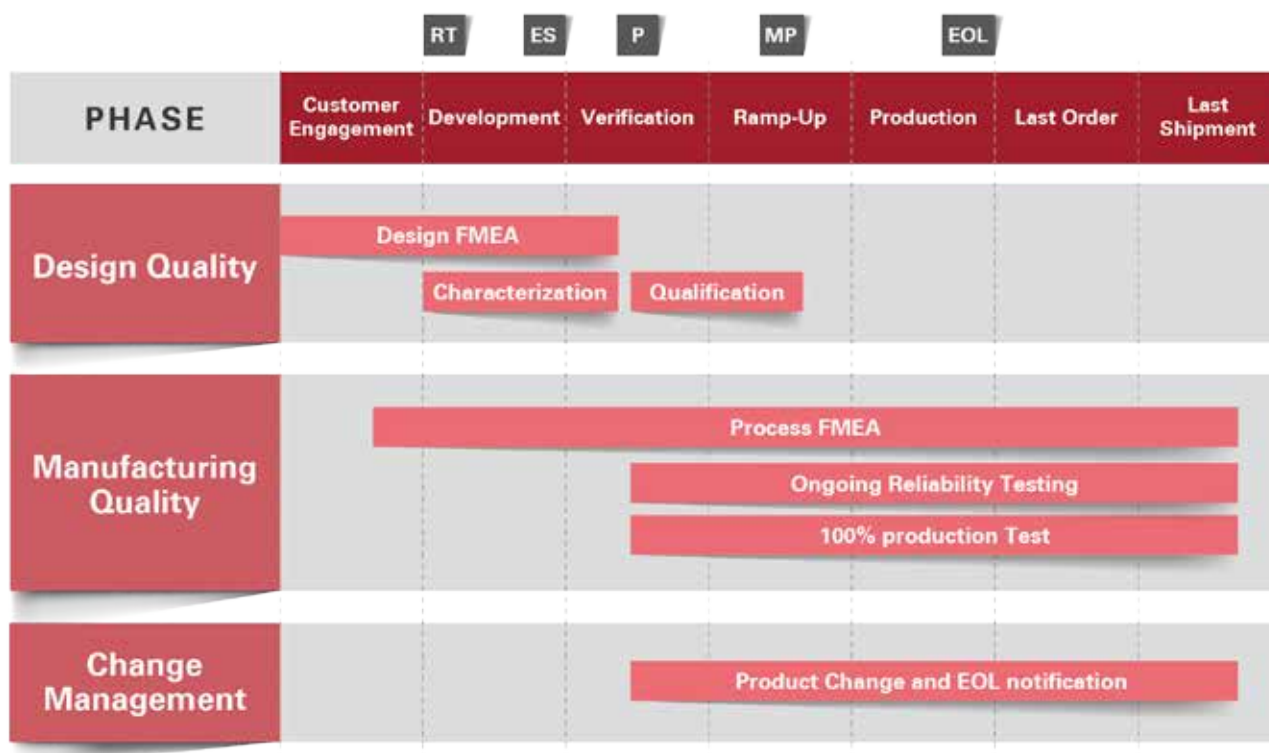

## Strategic Partnership

For enterprises operating in difficult or potentially hazardous environments, access to the latest technology, built specifically for these demanding industries, is imperative. The engineering process and in-depth knowledge of electrical, mechanical, thermal and firmware design ensure optimized performance, durability and reliability with every rugged product we create. Our technologies undergo a battery of tests at our in-house, state-of-the-art testing facility to verify this performance.

We have also forged strategic partnerships with leading technology companies in order to provide you with the cutting-edge, industrial-grade communication tools to maximize your operational efficiency, safety, asset tracking and data management. With partners such as Microsoft, Intel, Qualcomm and AWS, we have the advantage of gaining early access to the latest developments, which means we can provide our customers with cutting-edge technology and software.



# Introduction

## Reliability Test Facilities

Winmate provides consulting and testing services to ensure products are in compliance with the latest global industrial standards and regulations. By working closely with the regulatory agencies Winmate guarantees that the product time to market is minimized. The results are documented and provided to regulatory agencies for certification.

In-house testing lab allows Winmate to achieve high standards of product reliability and ruggedness with the shortest possible product development cycle. Rather than outsourcing critical reliability test, Winmate is able to perform vibration, drop, thermal and dry heat, and EMC and EMI tests, as well as radio emission and susceptibility, giving us the market advantage in speed and quality.

Winmate also offers a wide range of customer support services and has implemented an extensive environmental protection policy to meet the standards of the electronics industry. To learn more, visit our website at [www.winmate.com](http://www.winmate.com).

### In-House Testing Lab:





## Quality Assurance

Winmate promotes standardization of material, facilities, and engineering practices to improve industrial safety standards and regulations, while reducing the total cost of ownership and acquisition cycle time. Our materials, tools, facilities, engineering, and testing practices are designed to ensure reliability and durability.

At Winmate we developed and implemented a quality management system based on a process management approach. This allows us to maintain consistency in product service and support, and meet all applicable regulatory requirements, while remaining nimble and flexible enough to evolve with technology and industry need. The quality system complies with the international standard ISO 9001:2015 and the standards which apply to related industries.

### Quality Information Summary

Certification	Registration Date	Expiration Date	Certifying Agency
<b>Quality Management Systems (QMS)</b>			
ISO 9001:2015 Registered	2019/8/22	2022/8/22	SGS
ISO 14001:2015 Registered	2019/8/22	2022/8/22	SGS
<b>Other registrations, certifications and special process capabilities</b>			
IECQ QC 080000: 2017	2019/9/5	2022/9/4	SGS
ISO 13485: 2016	2018/12/19	2021/12/19	SGS
IEC80079-34: 2011	2015/6/20	2021/6/29	CSA

### Product Certification

Tailored for industrial applications, Winmate's products go through serious product testing to comply with international industry standards and regulations. Product certifications verify how components perform under real-world conditions. It is an independent evidence for the product quality, reliability and safety. Our products have proved themselves in numerous projects right around the globe in hazardous locations, marine, transportation, healthcare, military and other industrial environments.


# Introduction

## Environmental Protection & Responsibility

Winmate Inc. acknowledges a responsibility to the environment, and expresses our commitment towards implementing practices which will promote environmental sustainability. The following policy governs the management of the environmental aspects of our company, with specific focus on the conservation of resources and the reduction of waste. This policy relates to how all operations in our company will be continually reviewed and improved, so that we will truly be able to integrate environmental and social considerations into our everyday practices. Winmate will consistently strive to raise awareness in the community, encourage participation and train employees in environmental matters.

### Green Manufacturing

Winmate Inc. assimilates green management into every stage of product design and development and implements continuous improvement projects in the areas of climate change, energy management, water management, waste management and air pollution control. We follow Green Product Design principles and consider the environmental impacts of raw material procurement, manufacturing, transportation and distribution, consumer use, and recycling. Winmate's goal is to facilitate coexistence and mutual prosperity between our business and the environment.

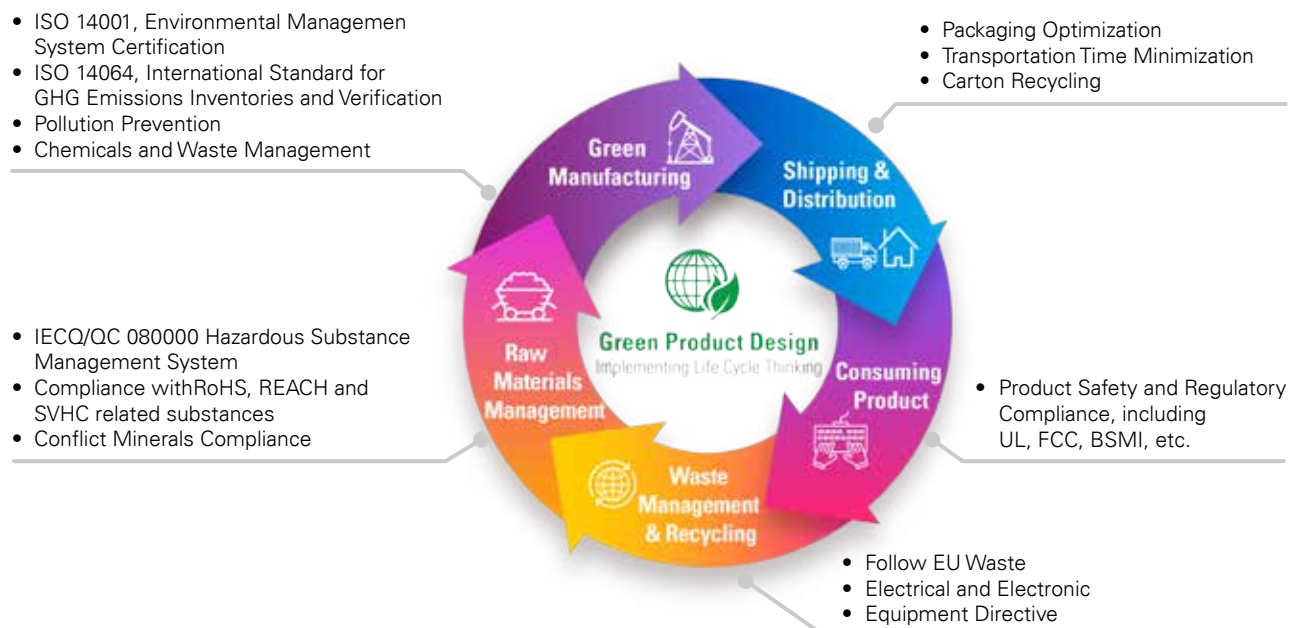

## Environmental Protection & Responsibility

### EU RoHS Declaration of Conformity

The RoHS Directive is a CE marking Directive. This means that equipment within its scope must carry a CE marking if it is offered for sale or placed on the market in the EU. The CE marking is applied by the manufacturer (or Authorized Representative, if mandated) on the product.

Winmate Inc. hereby certify that any substances used in homogeneous materials, parts, semi-finished products, manufacturing process, and products meet the regulatory compliance of RoHS Directive.

Besides, our lead-free production line and process, including solder paste, solder bar and process control parameters, has been developed and standardized in our manufacturing system.

### Conflict Free Minerals Policy

As Reported by EICC (Electronic Industry Citizenship Coalition) and GeSI (Global e-Sustainability initiative), that the origin of these minerals has become the Democratic Republic of Congo's Main revenue sources of armed rebel groups, to deal in arms, continued its bloody conflict between government forces, devastated the local civilian population, thus triggering international disputes.

Winmate Inc. as the global citizen, we declare and commit to refuse the application of metals from fighting region; meanwhile, we request Winmate supply chain to obey and guarantee the things below:

#### Our sourcing policy for Conflict Free Minerals:

- Conduct your operation in a way of social and environmental responsibility
- Not use the conflict minerals originated from the Democratic Republic of the Congo (DRC) and its adjoining countries
- Make the same requirements to your upstream suppliers



# Industries

Winmate understands the need for ruggedness and uninterrupted productivity when it comes to operating in challenging environments. We provide application-ready computing solutions for marine and military, oil and gas, warehouse and logistics, factory automation, healthcare and other industrial vertical markets.



## Oil & Gas

ATEX and Class 1 Division 2 (C1D2) certified solutions for collecting data in remote rig and pipeline locations.



## Marine

IEC 60945 compliance and DNV (Det Norske Veritas) certified solutions for maritime applications in a vessel or bridge.



## Military

Rugged military products that comply with MIL-STD-810G environmental and MIL-STD-461F EMC standards.



## Healthcare

Certified for healthcare applications, our computing devices are made for safe operations and collecting sensitive data in a hospital environment.



## Food & Beverage Industry

Waterproof IP69K, IP67 and IP65 panel PC and display meet high hygiene standards, resist moisture and chemical cleaning.



## Factory Automation

Wide range of advanced technologies for factory automation from data collection to operator control and remote device management.



### Warehouse & Logistics

Vehicle mounted computers for inventory management whether in inventory delivery, port logistics or warehousing.



### Field Service

Rugged mobile computers for data collection needs of workshops, field surveys, delivery services.



### Public Safety

Compact and rugged data capture devices for public safety applications.



### Transportation

Track and optimize routes with our vehicle mounted computers or rugged tablets with vehicle docking.



### Vehicle Diagnostics

Rugged technology for your vehicle servicing solution and car repair workshop applications.



### Utilities

Embedded systems and gateways for data collection and transfer in remote locations. Connect everything, control everywhere!

# Product Highlights

Highlights indicate Winmate's recommended and most popular products from our extensive product portfolio, including x-86 and Arm Mobile Solutions, Embedded Systems, Panel PC and HMI, and Display categories.

## Mobile x86

### 13.3" Ultra-Rugged Tablet **M133K/M133WK**



p.58

- Intel® Core™ i5-7200U
- Intel® Core™ i5-8265U

### 10.1" Rugged Tablet **M116P**



p.44

- Intel® Pentium® N4200

### 10.1" Rugged Tablet **M116K**



p.44

- Intel® Core™ i5-7200U

### 10.1" Rugged Tablet **M101P**



p.40

- Intel® Pentium N4200

### 13.3" Ultra-Rugged Tablet **M101S**



p.40

- Intel® Core™ i5-7200U

### 8" Rugged Tablet with QWERTY **M101PK** Q2, 2020



p.34

- Intel® Pentium N4200

### 8" Rugged Tablet **M900P**



p.32

- Intel® Pentium® N4200

### 8" Rugged Tablet with Smart Card Reader **M900PT**



p.32

- Intel® Pentium® N4200

### 7" Vehicle Mount Computer **FM07**



p.63

- Intel® Celeron® N3350



## Mobile Arm

### 5" Rugged Tablet **E500QK**

Q2, 2020



p.24

- Qualcomm® Snapdragon™ 660

### 7" Rugged Tablet **M700DQ8**

Q1, 2020



p.30

- Qualcomm® Snapdragon™ 660

### 7" Vehicle Mount Computer **FM07A**

(E)



p.65

- Arm Cortex-A9

### 8" Rugged Tablet **M900Q8**

Q2, 2020



p.36

- Qualcomm® Snapdragon™ 660

### 10.1" Rugged Tablet **M101Z**

Q4, 2020



p.98

- Qualcomm® Snapdragon™ 660

### 10.4" Rugged Tablet **FM10Q**

Q2, 2020



p.72

- Qualcomm® Snapdragon™ 660



**PLANNED**  
Time in Planned Downtime  
**01:29:18**  
Time in Planned Downtime Job / Shift  
01:29:18 / 01:29:18

**DOWNTIME**  
Time in Downtime Job / Shift  
**01:29:18**  
01:29:18 / 01:29:18

**SETUP**  
Time in Setup  
**01:29:18**  
Time in Setup Job / Shift  
01:29:18 / 01:29:18



SLEEVES IN  
245649/900000  
SLEEVES OUT  
245617/900000

**RUNNING**  
Time in Running  
**01:29:18**  
Time in Running Job / Shift  
01:29:18 / 01:29:18

SHIFT JOB  
OUT EVENTS  
STARTS

# RUGGED MOBILE COMPUTER

## **Rugged Mobile Computer**

Overview ..... 17

## **4.3" Rugged Mobile Computers**

Arm Rugged Mobile Computer ..... 19

## **5" Rugged Mobile Computers**

Arm Rugged Mobile Computer ..... 23





# Rugged Mobile Computer


## Overview

Winmate's rugged mobile solutions are built to withstand rigors of the harshest environments and designed to improve efficiency and productivity of field workers. Durable mobile computers provide workers with access to information anytime no matter where the task brings them. Wireless connectivity, data collection and data transfer allow you to keep in touch with the operators all day long.

### **Our rugged mobile computers include:**

- The latest Android™ or Windows® operating system
- Advanced data collection options
- Durable design

Winmate's rugged mobile computers are built to last, reducing total cost of ownership over time. Retailers, manufacturers, logistics companies and field service organizations all choose Winmate mobile computers to improve daily operations.

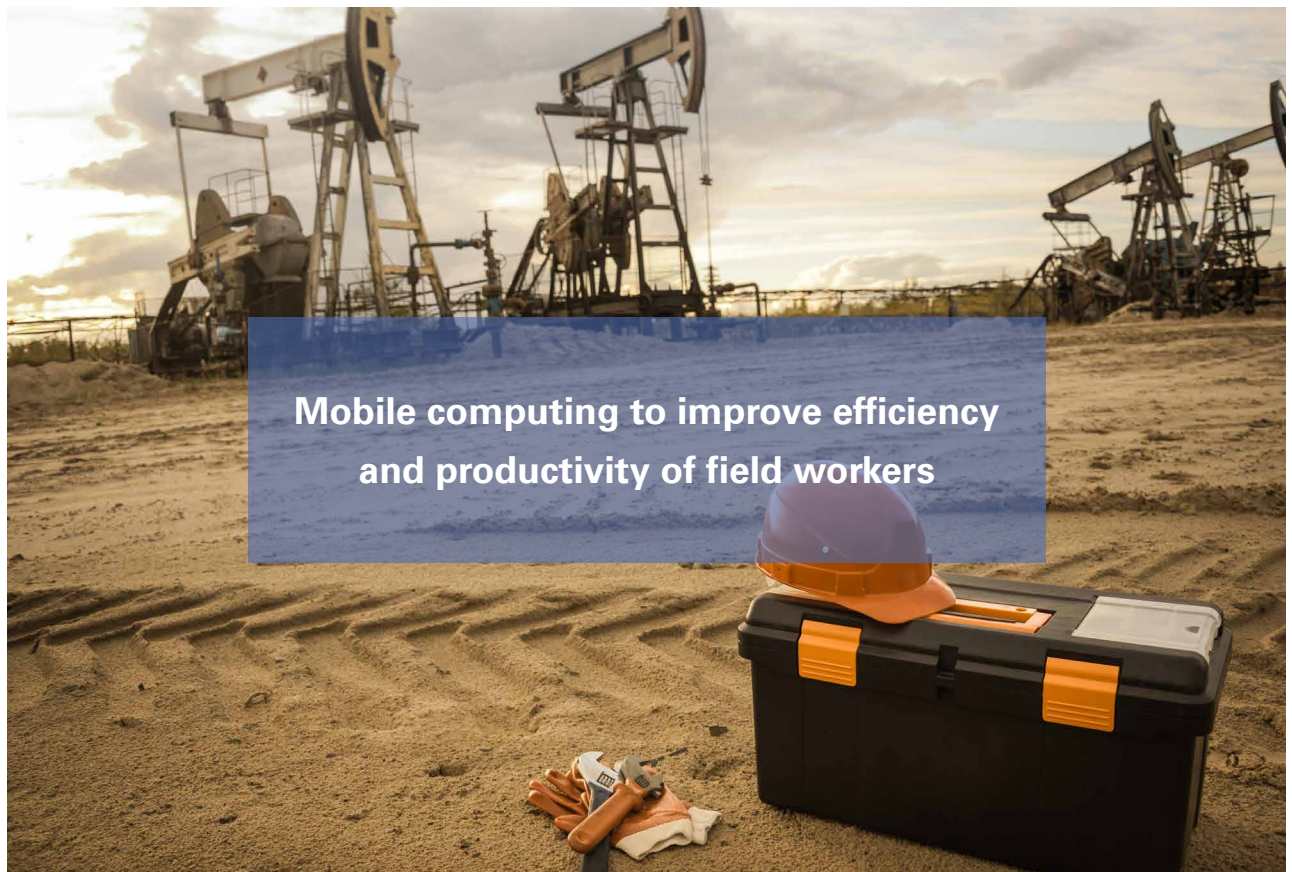

**Mobile computing to improve efficiency  
and productivity of field workers**

## Technology

Winmate's Rugged Mobile Computers are pocket-sized mobile devices packing powerful mobile computing performance, convenient connectivity and data capture capabilities, which are essential for enhancing service level for a variety of vertical applications within the retail, hospitality and field service sectors.



- **Barcode Scanner** – Winmate's Rugged Mobile computers are 1D/2D Barcode Scanner configurable to serve as multi-use devices that support a wide variety of field workers while maintaining constant communication with co-workers and the central server.







- **Smart Card Reader** – Handheld device equipped with Smart Card Reader is a compact, ergonomic, and rugged solution for a wide range of applications where information security is a priority – medical identification, e-government and e-commerce applications. The device securely inputs the sensitive data from ID card to the system and guarantees the safety and confidentiality of information.



- **Fingerprint Scanner** – In the areas where the work content varies by confidentiality degree, the importance of information security arise. Fingerprints taken using the handheld device provide access for the information only to authorized personnel, significantly improving information management system on the field.

## Product Guide - Rugged Mobile Computer

Our product guide helps you to navigate and find the right product from our excessive product line.

Arm Rugged Mobile Computer	
	
<b>E430RT-C</b>	<b>E430RT-M</b>
p.20	p.20
	
<b>E430RM4L</b>	<b>E500RM8</b>
p.21	p.23



# 4.3" Arm Rugged Mobile Computer E430 Series

## Custom configuration



Barcode  
Reader



HF RFID  
Reader



Additional  
Storage



## Application



### High Voltage Power Line Inspection

"LIGHTWEIGHT, MOBILE  
SOLUTION WITH HIGH  
ACCURACY GPS."

Winmate 4.3" rugged  
handheld with customization  
in RFID reader, high accuracy  
GPS, and software is able  
to read the tags located at  
the base of the transmission  
towers.

**" RUGGED & COMPACT.  
IDEAL FOR FIELD WORK. "**

- 4.3" 800 x 480 PCAP touchscreen
- TI Cortex™-A8 OMAP DM3730
- Windows CE 6.0 (E430RT-C)
- Windows WEH 6.5 (E430RT-M)

2MP webcam front camera

5MP rear camera

Wi-Fi, Bluetooth, GPS

260g lightweight portability

USB OTG

3.7V 3900mAh Li-Poly removable battery

IP65 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistance

Operating temperature -10°C to 50°C

## Accessories

### Standard

Universal USB Adapter

Micro USB Cable

Micro SD Card 16GB

Hand Strap

### Optional

Charging Dock

Battery Charging Dock

Vehicle Charging Dock

Battery

Lanyard

Micro USB Host Cable (OTG Cable)

UHF RFID Reader

Mobile Printer

## 4.3" Arm Rugged Mobile Computer

TI Cortex™-A8 OMAP DM3730



Model Name	4.3"	4.3"
	E430RT-C	E430RT-M
<b>Display</b>		
<b>Resolution</b>	800 x 480	800 x 480
<b>Panel Brightness</b>	400 nits	400 nits
<b>Contrast Ratio</b>	800:1 (Typ.)	800:1 (Typ.)
<b>Touch</b>	PCAP touchscreen	PCAP touchscreen
<b>System</b>		
<b>Processor</b>	TI Cortex™-A8 OMAP DM3730 (1 GHz)	TI Cortex™-A8 OMAP DM3730 (1 GHz)
<b>Memory</b>	512 MB SDRAM	512 MB SDRAM
<b>Storage</b>	512 MB NAND flash, Micro SD Card (Up to 32GB)	512 MB NAND flash, Micro SD Card (Up to 32GB)
<b>OS</b>	Windows CE 6.0	Windows WEH 6.5
<b>Wireless Communications</b>		
<b>WLAN</b>	802.11 b/g/n	802.11 b/g/n
<b>Bluetooth</b>	Bluetooth (V2.1 + EDR)	Bluetooth (V2.1 + EDR)
<b>GPS</b>	Built-in u-Blox GPS	Built-in u-Blox GPS
<b>Connectors</b>		
<b>Connectors</b>	Micro SIM Card Slot, Micro SD Card Slot, USB OTG, Pogo Pin	Micro SIM Card Slot, Micro SD Card Slot, USBOTG, Pogo Pin
<b>Audio</b>		
<b>Audio</b>	Mic, Earphone, 1.2W Speaker	Mic, Earphone, 1.2W Speaker
<b>User Controls</b>		
<b>Buttons</b>	Volume - +, Power, Function Home, Menu, ESC, Search	Volume - +, Power, Function Home, Menu, ESC, Search
<b>LED Indicators</b>	1 x LED Indicator	1 x LED Indicator
<b>Sensors</b>	Light, Proximity, G-sensor, Digital Compass	Light, Proximity, G-sensor, Digital Compass
<b>Mechanical</b>		
<b>Dimensions</b>	132.57 x 81.87 x 27.4 mm	132.57 x 81.87 x 27.4 mm
<b>Net Weight</b>	260g	260g
<b>Environment</b>		
<b>Operating Temp.</b>	-10°C to 50°C	-10°C to 50°C
<b>Humidity</b>	10% to 95% (Non-condensing, RH)	10% to 95% (Non-condensing, RH)
<b>IP Rating</b>	IP65	IP65
<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I
<b>Drop</b>	MIL-STD-810G Method 516.6, 4 ft, Free to concrete	MIL-STD-810G Method 516.6, 4 ft, Free to concrete
<b>Power Considerations</b>		
<b>Adapter</b>	5V/1A, USB	5V/1A, USB
<b>Battery</b>	3.7V 3900mAh Li-Poly	3.7V 3900mAh Li-Poly
<b>Battery Operating Time</b>	20 Hr	20 Hr
<b>Data Capture</b>		
<b>Camera</b>	Rear: 5MP, Front: 2MP	Rear: 5MP, Front: 2MP
<b>Barcode</b>	Motorola SE4500 (Optional)	Motorola SE4500 (Optional)
<b>RFID</b>	HF RFID Reader (Optional)	HF RFID Reader (Optional)
<b>NFC</b>	-	-
<b>Certifications</b>		
<b>Safety</b>	CE, FCC, CCC, UL	CE, FCC, CCC, UL

# 4.3" Arm Rugged Mobile Computer E430 Series

## Custom configuration



Barcode  
Reader



HF RFID  
Reader



Additional  
Storage



## Application



### High Voltage Power Line Inspection

"LIGHTWEIGHT, MOBILE  
SOLUTION WITH HIGH  
ACCURACY GPS."

Winmate 4.3" rugged handheld with customization in RFID reader, high accuracy GPS, and software is able to read the tags located at the base of the transmission towers.

**" RUGGED & COMPACT.  
IDEAL FOR FIELD WORK. "**

- 4.3" 800 x 480 PCAP touchscreen
- Arm Cortex-A53
- Android 7.0

---

2MP webcam front camera

---

8MP rear camera

---

WWAN, Wi-Fi, Bluetooth, GPS

---

260g lightweight portability

---

USB OTG

---

3.7V 3900mAh Li-Poly removable battery

---

IP65 waterproof and dustproof

---

MIL-STD-810G shock, vibration and drop resistance

---

Operating temperature -10°C to 50°C

## Accessories

### Standard

Universal USB Adapter

Micro USB Cable

Micro SD Card 16GB

Hand Strap

### Optional

Charging Dock  
Lanyard

Battery Charging Dock  
Micro USB Host Cable (OTG Cable)

Vehicle Charging Dock  
UHF RFID Reader

Battery

## 4.3" Arm Rugged Mobile Computer

Arm Cortex-A53



Model Name	4.3"
	E430RM4L
<b>Display</b>	
Resolution	800 x 480
Panel Brightness	400 nits
Contrast Ratio	800:1 (Typ.)
Touch	PCAP touchscreen
<b>System</b>	
Processor	Arm Cortex-A53 (Quad-core 1.3 GHz)
Memory	2GB SDRAM
Storage	16GB eMMC (Up to 32GB), Micro SD Card (Up to 32GB)
OS	Android 7.0
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n
Bluetooth	Bluetooth 4.0
WWAN	Optional 4G LTE
GPS	Built-in GPS
<b>Connectors</b>	
Connectors	Micro SIM Card Slot, Micro SD Card Slot, USB OTG, Pogo Pin
<b>Audio</b>	
Audio	Mic, Earphone, 1.2W Speaker
<b>User Controls</b>	
Buttons	Volume - +, Power, Function Home, Menu, ESC, Search
LED Indicators	1 x LED Indicator
Sensors	Light, Proximity, G-sensor, Digital Compass
<b>Mechanical</b>	
Dimensions	132.57 x 81.87 x 27.4 mm
Net Weight	260g
<b>Environment</b>	
Operating Temp.	-10°C to 50°C
Humidity	10% to 95% (Non-condensing, RH)
IP Rating	IP65
Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 516.6, 4 ft, Free to concrete
<b>Power Considerations</b>	
Adapter	5V/1A, USB
Battery	3.7V 3900mAh Li-Poly
Battery Operating Time	20 Hr
<b>Data Capture</b>	
Camera	Rear: 8MP camera with LED auxiliary light auto focus Front: 2MP camera (Either one with Barcode Reader)
Barcode	Motorola SE4500 (Optional)
RFID	HF RFID Reader (Optional)
NFC	Read / Write, Peer to Peer
<b>Certifications</b>	
Safety	CE, FCC, CCC



# 5" Arm Rugged Mobile Computer E500 Series

## Custom configuration



Barcode Reader



Fingerprint Reader



Smart Card Reader



Battery Hotswap



“ **ALL-IN-ONE.  
FOR DATA COLLECTION.** ”

## Application



### Public Safety

“SPEED UP REAL TIME  
DATA EXCHANGE AND  
IDENTIFICATION.”

The E500RM8 combines barcode, fingerprint and smart card readers for various data collection options on the field. Customized logo and customized software settings ensure flexibility for deployment in police applications.

- 5" 1280 x 720 PCAP touchscreen
- Arm Cortex-A53 (E500RM8)
- Qualcomm® Snapdragon™ 660 (E500QK)
- Android 7.0 (E500RM8)
- Android 9.0 (E500QK)

2MP front camera; 8MP rear camera with autofocus and LED flash (E500RM8)

8MP front camera; 13MP rear camera with autofocus and LED flash (E500QK)

Wi-Fi, Bluetooth, GPS

3.7V 3900mAh Li-ion removable battery

IP65 waterproof and dustproof (E500RM8)

IP67 waterproof and dustproof (E500QK)

MIL-STD-810G shock, vibration and drop resistance

## Accessories

### Standard

Power Plug

Micro USB Cable

Micro SD Card

Hand Strap

### Optional

Charging Dock

Battery Charging Dock

Battery

# 5" Arm Rugged Mobile Computer

Arm Cortex-A53

Qualcomm® Snapdragon™ 660



NEW

Q2, 2020



Model Name	5"	5"
	E500RM8	E500QK
<b>Display</b>		
<b>Resolution</b>	1280 x 720	1280 x 720
<b>Panel Brightness</b>	500 nits	500 nits
<b>Contrast Ratio</b>	800:1 (Typ.)	800:1 (Typ.)
<b>Sensors</b>	Light Sensor, Proximity Sensor, G-sensor, E-compass	Light Sensor, G-sensor, E-compass
<b>Touch</b>	PCAP touchscreen	PCAP touchscreen
<b>System</b>		
<b>Processor</b>	Arm Cortex-A53 (Octa-core 1.3 GHz)	Qualcomm® Snapdragon™ 660 (Octa-core up to 2.2 GHz)
<b>Memory</b>	2GB SDRAM	3GB RAM
<b>Storage</b>	16GB eMMC	32GB eMMC
<b>OS</b>	Android 7.0	Android 9.0
<b>Wireless Communications</b>		
<b>WLAN</b>	802.11 a/b/g/n	802.11 a/b/g/n/ac
<b>Bluetooth</b>	Bluetooth 4.0	Bluetooth 5.0
<b>WWAN</b>	Optional 4G LTE	Optional 4G LTE
<b>GPS</b>	GPS / AGPS / GLONASS	GPS / AGPS / GLONASS
<b>Connectors</b>		
<b>Connectors</b>	2 x Micro SIM Card Slot, 1 x Micro SD Card Slot, 1 x USB OTG, 1x Power Jack, 1 x Docking Connector	1 x Micro SIM Card Slot, 1 x Micro SD Card Slot, 1 x USB TypeC, 1 x Docking Connector
<b>User Controls</b>		
<b>Buttons</b>	1 x Volume - +, 1 x Power button, 2 x Function button, 4 x Front Key	1 x Volume - +, 2 x Function button, 1 x 19 keypad include power key
<b>LED Indicator</b>	1 x LED indicator	1 x LED indicator
<b>Mechanical</b>		
<b>Dimensions</b>	85.9 x 163.2 x 22.5 mm	192 x 92 x 27.5 mm
<b>Net Weight</b>	315 g	370 g
<b>Environment</b>		
<b>Operating Temp.</b>	-10°C to 50°C	-20°C to 60°C
<b>IP Rating</b>	IP65	IP67
<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I
<b>Drop</b>	MIL-STD-810G Method 516.6, 4 ft, Free to concrete	MIL-STD-810G Method 516.6, 4 ft, Free to concrete
<b>Power</b>		
<b>Adapter</b>	5V 2A Adapter	5V (USB Type-C)
<b>Battery</b>	3.7V 3900mAh Li-ion removable battery	3.7V 3900mAh Li-ion battery
<b>Battery Operating Time</b>	20 hrs	-
<b>Data Capture</b>		
<b>Camera</b>	Rear: 8MP camera with LED auxiliary light auto focus Front: 2MP camera (Either one with Barcode Reader)	Rear: 13MP Camera with LED auxilliary light (Auto focus)(Optional) Front: 8MP Camera
<b>Barcode</b>	1D/2D Barcode Reader (Optional)	-
<b>Smart Card</b>	ISO 7816 part 1,2,3 (Optional)	-
<b>Fingerprint</b>	Fingerprint Reader (Optional)	-
<b>NFC</b>	Default NFC (Read / Write, Peer to Peer mode)	-
<b>Certifications</b>		
<b>Safety</b>	CE, FCC, CCC	CE, FCC, CCC





# RUGGED TABLET

## Rugged Tablet

Overview ..... 27

## 7" Arm Rugged Tablet

M700 Series ..... 29

## 8" x86 Rugged Tablet

M900 Series ..... 31

M101 Series ..... 33

## 8" Arm Rugged Tablet

M900 Series ..... 35

## 10.1" x86 Rugged Tablet

M101B Series ..... 37

M101P/S Series ..... 39

## 10.1" Arm Rugged Tablet

M101RK/M8/Q8 Series ..... 41

## 11.6" x86 Rugged Tablet

M116P/K Series ..... 43



# Rugged Tablet


## Overview

Mobility is the new trend for industrial applications. With the latest development in mobility and battery management technology, Winmate combines its existing ruggedness, panel technology, and software capabilities and delivers this in our rugged tablet product line.

### Our rugged tablets include:

- The latest Android™ or Windows® operating system
- Robust wireless communications
- Data capture possibilities
- IP65 water and dust proofing

With all the application-focused features and data collection options, Winmate rugged mobile devices will fit into your needs no matter where your task takes you.

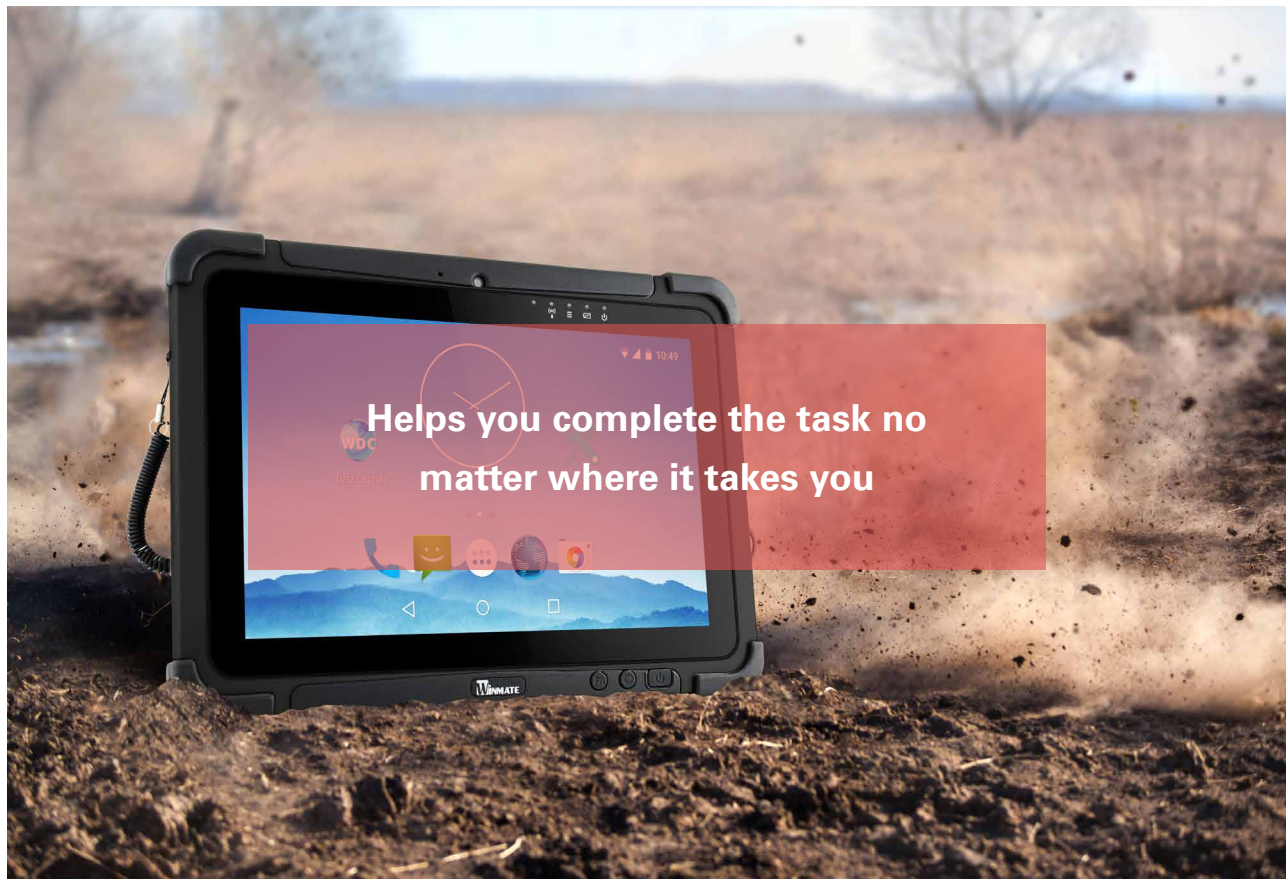


## Technology

From inventory management to order fulfillment, asset tracking, and shipping and receiving, the warehouse floor is complex ecosystem that requires high-efficiency technology to keep it running smoothly. Winmate's full line of rugged, mobile tablets are built to endure the rigors of the warehouse, and designed to fit seamlessly into forklifts, trucks, and other warehouse vehicles.

All Winmate mobile tablets are equipped with vehicle docking for easy mounting to a variety of standard VESA mounts or universal AMPS hole patterns, such as those available from RAM Mounts.



The Vehicle Dock is designed to be mounted to RAM Mount solutions, whom provides various type of mount types to fit any industrial use. Vehicle operators can also connect an external keyboard via USB to speed up data entry and reduce errors.

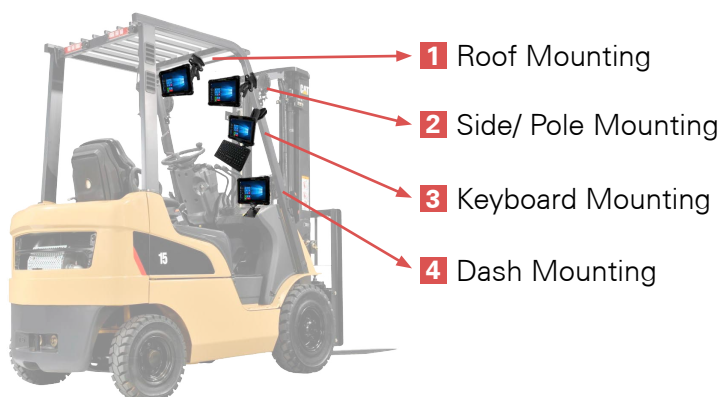

## Product Guide - Rugged Tablet PC

Our product guide helps you to navigate and find the right product from our excessive product line.

x86 Rugged Tablet PC			
			
<b>M101BK/M101PK</b> p.33	<b>M900P/PT</b> p.31	<b>M101P/S</b> p.39	<b>M116P/K</b> p.43
Arm Rugged Tablet PC			
			
<b>M700DM8</b> p.29	<b>M700DQ8</b> p.29	<b>M900Q8</b> p.35	<b>M900M9</b> p.35

# 7" Arm Rugged Tablet M700 Series

## Custom configuration



Barcode  
Reader



Battery  
Hotswap



## Application



### Forklift Solution

"FROM FIXED MOUNTING  
TO PORTABLE SOLUTION."

The M700DM8 rugged tablet  
with vehicle docking delivers  
portable and rugged solution  
for warehouse management  
and route optimization.

“ **COMPACT.  
VIBRATION RESISTANT.** ”

- 7" 1280 x 720 PCAP touchscreen
- Arm Cortex-A53 (M700DM8)
- Qualcomm® Snapdragon™ 660 (M700DQ8)
- Android 7.0 (M700DM8)
- Android 9.0 (M700DQ8)

---

2MP webcam, 8MP rear camera (M700DM8)

---

8MP webcam, 13MP rear camera (M700DQ8)

---

2GB RAM, 16GB eMMC (M700DM8)

---

3GB RAM, 32GB eMMC (M700DQ8)

---

Wi-Fi, Bluetooth, GPS, GLONASS

---

Up to 20 hours battery operating time

---

IP65 waterproof and dustproof

---

MIL-STD-810G shock, vibration and drop resistant

---

Wide operating temperature

---

Operating temperature -10°C to 50°C

## Accessories

### Standard

---

Universal Adapter	Battery
-------------------	---------

### Optional

---

Battery Charging Dock	Vehicle Dock	Desk Dock	Handstrap	Carry Bag
Micro SD Card	Capacitive Touch Stylus	Mobile Printer	Vehicle Adapter	

# 7" Arm Rugged Tablet

Arm Cortex-A53

Qualcomm® Snapdragon™ 660



NEW

Q1, 2020



Model Name	7" (16:9)	7" (16:9)
	M700DM8	M700DQ8
<b>Display</b>		
Resolution	1280 x 720	1280 x 720
Panel Brightness	650 nits	650 nits
Contrast Ratio	800:1 (Typ.)	800:1 (Typ.)
Sensors	G-sensor, light sensor	G-sensor, light sensor
Touch	PCAP touchscreen	PCAP touchscreen
<b>System</b>		
Processor	Arm Cortex-A53 (Octa-core 1.3 GHz)	Qualcomm® Snapdragon™ 660 (Octa-core up to 2.2 GHz)
Memory	2GB DDR3 SDRAM	3GB RAM
Storage	16GB eMMC	32GB eMMC
OS	Android 7.0	Android 9.0
<b>Wireless Communications</b>		
WLAN	802.11 a/b/g/n	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 4.0, Support BLE mode + wide-band speech	Bluetooth 5.0
WWAN	Optional 4G LTE	Optional 4G LTE
GNSS	GPS / AGPS / GLONASS	GPS / AGPS / GLONASS
<b>Connectors</b>		
Connectors	1 x USB OTG, 1 x DC Power Input, 1 x Micro SIM Card Slot, 1 x Micro SD Card Slot	1 x Docking connector, 1 x USB Type-C, 1 x Power Jack, 1 x Micro SIM Card Slot, 1 x Micro SD Card Slot
<b>Audio</b>		
Audio	1 x 1.2W Speaker, 2 x Microphone, 1 x Headset jack (Mic+Earphone)	1 x 1.2 W speaker, 2 x Built-in Mic, 1 x Earphone
<b>User Controls</b>		
Buttons	On-screen QWERTY keyboard Button 1 x Volume +/- , 1 x Power Button, 1 x Home Button, 1 x Menu Button, 1 x Return Button, 1 x Trigger Button	On-screen QWERTY keyboard Button 1 x Volume +/- , 1 x Power Button, 1 x Home Button, 1 x Menu Button, 1 x Return Button, 1 x Trigger Button
LED indicator	Power, Battery	2 x LED indicators (Power, Battery)
<b>Mechanical</b>		
Dimensions	212.4 x 132.8 x 19 mm	212.4 x 132.8 x 19 mm
Net Weight	550g	550g
<b>Environment</b>		
Operating Temp.	-10°C to 50°C	-10°C to 50°C
Humidity	5% to 95% (Non-condensing, RH)	5% to 95% (Non-condensing, RH)
IP Rating	IP65	IP65 Certified, waterproof and dustproof
Shock	MIL-STD-810G M516.6	MIL-STD-810G M516.6
Vibration	MIL-STD-810G M514.6	MIL-STD-810G M514.6
Drop	MIL-STD-810G M516.6 5 ft, Free to concrete	MIL-STD-810G M516.6 5 ft, Free to concrete
<b>Power</b>		
Power Input	5V DC	5V DC
Battery	3.7V 5300mAh Li-Poly	3.7V 5300mAh Li-Poly
Adapter	100-240V/ 5V 3A Adapter	100-240V/ 5V 3A Adapter
<b>Data Capture</b>		
Camera	Front: 2MP Camera, Rear: 8MP Camera with LED auxiliary light with autofocus	Web: 8MP Camera, Rear: 13MP Camera with LED auxiliary light with autofocus
Barcode	Motorola SE4500 1D/2D Barcode Reader (Optional)	1D/2D Barcode Reader (Optional)
NFC	NFC (Read/Write, Peer to Peer mode)	NFC (Optional)
<b>Certifications</b>		
Safety	CE, FCC, CCC	CE, FCC, CCC



# 8" x86 Rugged Tablet

## M900 Series

### Custom configuration



4G LTE



Barcode Reader



HF RFID Reader



EMV/MSR Reader



Micro SD Card Slot



Computrace



### Application



### Connected Truck

"CONNECTIVITY FOR VEHICLES ON THE ROAD."

Winmate developed a smart truck solution for a heavy-duty vehicle. Installed on a dashboard by vehicle cradle, the 8" rugged tablet M900P and custom designed vehicle gateway VG-100 now connect in-vehicle systems and allow status monitoring of a semi-truck in Europe.

**“ PORTABLE POWERFUL SOLUTION. ”**

- 8" 1280 x 800 screen PCAP touchscreen
- Intel® Pentium® N4200
- Windows 10 IoT Enterprise

Built-in MSR/ Smart Card Reader (M900PT)

2MP webcam front camera

8MP rear camera with autofocus and LED light

USB 3.0 Type-A, USB 3.0 Type-C

D-sub for vehicle gateway connection

Wi-Fi, Bluetooth 5.0, GPS, GLONASS

IP65 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistance

Operating temperature -10°C to 50°C

### Accessories

#### Standard

AC Adapter      Power Cord      Battery

#### Optional

Vehicle Gateway      Vehicle Cradle      USB Expansion Cable      Battery Charger      Handstrap  
Shoulder Strap      Carry Bag      Desk Dock

# 8" x86 Rugged Tablet

Intel® Pentium® N4200



Model Name	8"	8"
	M900P	M900PT
<b>Display</b>		
Resolution	1280 x 800	1280 x 800
Panel Brightness	510 nits	510 nits
Contrast Ratio	800:1	800:1
Viewing angle	-85~85 (H) ; -85~85 (V)	-85~85 (H) ; -85~85 (V)
Touch	PCAP touchscreen	PCAP touchscreen
<b>System</b>		
Processor	Intel® Pentium® N4200 (2M Cache, up to 2.5 GHz)	Intel® Pentium® N4200 (2M Cache, up to 2.5 GHz)
Memory	4GB LPDDR4	4GB LPDDR4
Storage	64GB M.2 SSD (Up to 512GB)	64GB M.2 SSD (Up to 512GB)
OS	Windows 10 IoT Enterprise	Windows 10 IoT Enterprise
<b>Wireless Communications</b>		
WLAN	802.11 a/b/g/n/ac	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 5.0	Bluetooth 5.0
WWAN	Optional 4G LTE	Optional 4G LTE
GNSS	GPS, GLONASS	GPS, GLONASS
<b>Audio</b>		
Audio	2 x Built-in Mic, 2 x 1W Speaker	2 x Built-in Mic, 2 x 1W Speaker
<b>Connectors</b>		
Connectors	1 x USB 3.0 Type-C, 1 x USB 3.0 Type-A, 1 x Audio Combo Conn. (Mic in/Line Out), 1 x Micro SD Card Slot, 1 x Micro SIM Card Slot	1 x USB 3.0 Type-C, 1 x USB 3.0 Type-A, 1 x Audio Combo connector (Mic in or Line Out), 1 x Power Jack, 1 x Micro SD Card Slot
<b>User Controls</b>		
Buttons	1 x Power Button, 1 x Menu/Home key, 3 x Programmable Function Key	1 x Power Button, 1 x Menu/Home key, 3 x Programmable Function Key
LED indicator	Power, Battery, HDD Access, RF	Power, Battery, HDD Access, RF
<b>Mechanical</b>		
Dimensions	225 x 148 x 20.5 mm (8.85 x 5.82 x 0.80 inches)	225 x 148 x 20.5 mm (10 x 7.76 x 0.8 inches)
Net Weight	0.9 kg (2 lbs) with standard battery	0.9 kg (2 lbs) with standard battery
<b>Environment</b>		
Operating Temp.	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)
Humidity	10% to 90% (Non-condensing, RH)	10% to 90% (Non-condensing, RH)
IP Rating	IP65	IP65
Shock	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 516.6, 5 ft to concrete	MIL-STD-810G Method 516.6, 5 ft to concrete
<b>Power</b>		
Power Input	19V DC, 3.42A	19V DC, 3.42A
Battery	7.6V 4200mAh Li-Polymer Battery (2S2P)	7.6V 4200mAh Li-Polymer Battery (2S2P)
Adapter	100~240V, 50-60Hz	100~240V, 50-60Hz
<b>Data Capture</b>		
Camera	Front: 2MP Webcam, Rear: 8MP with LED flash	Front: 2MP Webcam, Rear: 8MP with LED flash
Integrated	1D/2D Barcode Reader (Optional) HF RFID Reader (Optional) LF RFID Reader (Optional)	1D/2D Barcode Reader (Optional)
EMV/ MSR Card Reader	-	Built-in MSR/ Smart Card Reader ISO 781017811
<b>Certifications</b>		
Safety	CE, FCC, IC, UL 60950, E-mark	CE, FCC, IC, UL 60950, E-mark

## Custom configuration



Barcode  
Reader



HF RFID  
Reader



Micro SD  
Card Slot



High Capacity  
Battery 12 hr



4G LTE

## Application



## Diagnostics Tool at Workshop

"SIMPLIFIES CAR  
INSPECTION."

Portable adjustment and measurement device for wheel alignment system now considerably simplifies the regular car inspection with special steering wheel mount and desk docking station.

## 8" x86 Rugged Tablet

# M101 Series with QWERTY Keypad



## “ HYBRID DESIGN ”

- 8" 1280 x 800 WXGA with PCAP touchscreen
- Intel® Celeron® N2930 (M101BK)
- Intel® Pentium® N4200 (M101PK)
- Windows 10 IoT Enterprise
- With full QWERTY keypad

5MP rear camera

USB 3.0

Micro HDMI

Micro SD Card Slot

4GB DDR3L-1600, 64GB m.2 SATA SSD

Wi-Fi, Bluetooth 4.0, GPS, Galileo

Up to 6 hours battery operating time

Battery hot-swap support

IP65 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistance

Operating temperature -10°C to 50°C

## Accessories

### Standard

Adapter & Power Cord    Capacitive Stylus    Standard Battery

### Optional

Desk Dock	Vehicle Dock (Without VGA output)	Battery Charger	High Capacity Battery	Hand Strap
UHF RFID Reader	Smart Card Reader	LAN Cable	Carry Bag	Micro HDMI Cable
RS-232 Cable	Vehicle Charger	Shoulder Strap		

# 8" x86 Rugged Tablet

Intel® Celeron® N2930  
Intel® Pentium® N4200



NEW



Q2, 2020

Model Name	8"	8"
	M101BK	M101PK
<b>Display</b>		
Resolution	1280 x 800	1280 x 800
Panel Brightness	500 nits	500 nits
Contrast Ratio	800:1 (Typ.)	800:1 (Typ.)
Viewing angle	-88~88 (H) ; -88~88 (V)	-88~88 (H) ; -88~88 (V)
Touch	PCAP touchscreen	PCAP touchscreen (10-point)
<b>System</b>		
Processor	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	Intel® Pentium® N4200 (2M Cache, up to 2.5 GHz)
Memory	4GB SODIMM DDR3L-1600	4GB LPDDR4 (Up to 8GB)
Storage	64GB SSD	128GB SSD (Up to 512GB)
OS	Windows 10 IoT Enterprise Windows 7 Pro for Embedded System	Windows 10 IoT Enterprise
<b>Wireless Communications</b>		
WLAN	802.11 a/b/g/n/ac	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 4.0 Dual Mode	Bluetooth 5.0
WWAN	4G LTE module (Optional)	4G LTE module (Optional)
GPS	GPS, Galileo	GPS, GLONASS
<b>Connectors</b>		
Audio	2 x Stereo Speaker (80 db output)	2 x Stereo Speaker (80 db output)
Connectors	1 x 30-pin Combo Conn for Giga-LAN or RS232, 1 x USB 3.0, 1 x Power Jack, 1 x Micro SD Card Slot, 1 x Micro HDMI, 1 x 3.5mm Audio Combo Conn. (Mic in or Line Out), 1 x Expansion Connector for USB 2.0 / Full RS232 (Optional)	1 x Micro HDMI, 1 x Micro SD Slot, 1 x USB 3.0 (Type-A), 1 x USB 3.0 (Type-C), 1 x Line Out/ Mic in, 1 x DC Jack, 1 x Micro SIM Card Slot, 1 x Optional Exp. Port (USB 2.0 + RS232), 1 x Docking connector
<b>User Controls</b>		
Buttons	Physical Keyboard: ISO/IEC 9995-3 QWERTY Keypad, IP65 water and dust proof, with LED backlight (Keypad dimensions : min. 10x10mm) Physical Buttons: 1 x Power, 10 x Function Keys	Physical Keyboard: ISO/IEC 9995-3 QWERTY Keypad, IP65 water and dust proof, with LED backlight (Keypad dimensions : min. 10x10mm) Physical Buttons: 1 x Power, 10 x Function Keys
LED Indicator	Power, Battery, HDD, RF	Power, Battery, HDD, RF
<b>Mechanical</b>		
Dimensions	271.8 x 198.2 x 22 mm (10.7 x 7.80 x 0.87 inches)	271.8 x 198.2 x 22 mm (10.7 x 7.80 x 0.87 inches)
Net Weight	1.35 kg (2.97 lbs)	1.35 kg (2.97 lbs)
<b>Environment</b>		
Operating Temp.	AC Mode: -20°C to 60°C (-4°F to 140°F), Battery Mode: -10°C to 50°C (32°F to 122°F),	AC Mode: -20°C to 60°C (-4°F to 140°F), Battery Mode: -10°C to 50°C (32°F to 122°F),
Humidity	10% to 90% (Non-condensing, RH), MIL-STD 810G Method 507.5 Procedures I	10% to 90% (Non-condensing, RH), MIL-STD 810G Method 507.5 Procedures I
IP Rating	IP65 certified, dustproof and waterproof	IP65 certified, dustproof and waterproof
Shock	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 516.6 Procedure IV, 4 ft to concrete	MIL-STD-810G Method 516.6 Procedure IV, 4 ft to concrete
<b>Power</b>		
Power Input	19V DC	19V DC
Battery	7.4V typ. 5140mAh Li-Polymer Battery (2S1P)	7.7V typ. 5900mAh Li-Polymer Battery
AC Adapter	100~240V, 50-60Hz	100~240V, 50-60Hz
<b>Data Capture</b>		
Camera	Rear: 5MP auto-focus camera with LED flash	Rear: 8MP auto-focus camera with LED flash
<b>Certifications</b>		
Safety	CE, FCC	CE, FCC



# 8" Arm Rugged Tablet M900 Series

## Custom configuration



4G LTE



Barcode  
Reader



EMV/MSR  
Reader



## Application



### Fire and Rescue Service

"ROBUST  
COMMUNICATION DEVICE  
FOR MISSION-CRITICAL  
ENVIRONMENTS."

A fire department uses the device as a reliable computing and navigation system to communicate with others in real-time while simplifying file transfer and management.

**“ PORTABLE POWERFUL  
SOLUTION. ”**

- 8" 1280 x 800 PCAP touchscreen
- Qualcomm® Snapdragon™ 660 (M900Q8)
- Arm Cortex-A53 (M900M9)
- Android 9.0

---

8MP front camera

---

13MP rear camera

---

USB 2.0 (Type-A), USB 3.0 (Type-C)

---

D-Sub for Vehicle Gateway

---

Wi-Fi, Bluetooth, GPS, AGPS

---

IP65 waterproof and dustproof

---

MIL-STD-810G shock, vibration and drop resistance

---

Operating temperature -20°C to 60°C

## Accessories

### Standard

AC Adapter

Power Cord

Battery

Capacitive Stylus

### Optional

Vehicle Gateway

Vehicle Cradle

USB Expansion Cable

Battery Charger

Handstrap

Shoulder Strap

Carry Bag

Desk Dock

# 8" Arm Rugged Tablet

Qualcomm® Snapdragon™ 660  
Arm Cortex-A53

NEW



Q2, 2020

NEW



Q2, 2020

Model Name	8"	8"
	M900Q8	M900M9
<b>Display</b>		
Resolution	1280 x 800	1280 x 800
Panel Brightness	510 nits	510 nits
Contrast Ratio	800:1	800:1
Viewing angle	-85~85 (H) ; -85~85 (V)	-85~85 (H) ; -85~85 (V)
Touch	PCAP touchscreen	PCAP touchscreen
<b>System</b>		
Processor	Qualcomm® Snapdragon™ 660 (Octa-core up to 2.2 GHz)	Arm Cortex-A53 (Octa-core 2.2 GHz)
Memory	3GB	3GB
Storage	32GB eMMC	32GB eMMC
OS	Android 9.0	Android 9.0
<b>Wireless Communications</b>		
WLAN	802.11 a/b/g/n/ac WiFi	802.11 a/b/g/n/ac WiFi
Bluetooth	Bluetooth 5.0	Bluetooth 5.0
WWAN	Optional 4G LTE	Optional 4G LTE
GNSS	GPS, AGPS	GPS, AGPS
<b>Audio</b>		
Audio	Microphone built in 1 Watt speaker	Microphone built in 2 x 1 Watt speaker
<b>Connectors</b>		
Connectors	1 x 19-pin docking connector, 1 x Power Jack, 1 x USB2.0 (Type-A), 1 x USB3.0 (Type-C), 1 x Audio Combo connector (Mic in or Line Out), 1 x D-Sub for Vehicle Gateway	1 x 19-pin docking connector, 1 x Power Jack, 1 x Micro USB, 1 x Audio Combo connector (Mic in or Line Out), 1 x D-Sub for Vehicle Gateway
<b>User Controls</b>		
Buttons	1 x Power, 1 x Home, 3 x function key (Programmable function key configured by Hottab Utility)	1 x Power, 1 x Home, 3 x function key (Programmable function key configured by Hottab Utility)
LED indicator	Power, Charging Indicator	Power, Charging Indicator
<b>Mechanical</b>		
Dimensions	225 x 148 x 20.5 mm (10 x 7.76 x 0.8 inches)	225 x 148 x 20.5 mm (10 x 7.76 x 0.8 inches)
Net Weight	1 kg with battery	1 kg with battery
<b>Environment</b>		
Operating Temp.	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)
Humidity	10% to 90% (Non-condensing, RH)	10% to 90% (Non-condensing, RH)
IP Rating	IP65 certified, dustproof and waterproof	IP65 certified, dustproof and waterproof
Shock	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 516.6 Procedure I, 5 ft to concrete	MIL-STD-810G Method 516.6 Procedure I, 5 ft to concrete
<b>Power</b>		
Power Input	19V DC, 3.79A	19V DC, 3.79A
Battery	7.6V, typ. 4200mAh Li Polymer Battery (2S2P)	7.6V, typ. 4200mAh Li Polymer Battery (2S2P)
Adapter	100-240V, 50~60Hz	100-240V, 50~60Hz
<b>Data Capture</b>		
Camera	Front Camera: 8MP, Rear Camera: 13MP	Front Camera: 8MP, Rear Camera: 13MP
Integrated	1D/2D Barcode Scanner (Optional) NFC Reader	1D/2D Barcode Scanner (Optional) NFC Reader
EMV/ MSR Card Reader	EMV/ MSR Card Reader(Optional)	EMV/ MSR Card Reader(Optional)
<b>Certifications</b>		
Safety	CE,FCC	CE,FCC

# 10.1" x86 Rugged Tablet

## M101B Series

### Custom configuration



4G LTE



AR & AG  
Screen



Micro SD  
Card Slot



Barcode  
Reader



HF RFID  
Reader



Expansion Port



Micro HDMI



High Capacity  
Battery 16hr



Smart Card  
Reader



**“ SUNLIGHT READABLE.  
ROBUST. RELIABLE. ”**

### Application



### Ambulance Vehicle Mount Solution

**“FAST ACCESS TO PATIENT  
INFORMATION.”**

The M101B rugged tablet customized with LTE module and smart card reader help ECR professionals to access patient information on-the-go. The solution includes a vehicle cradle for in-vehicle mounting and charging. Winmate rugged mobile solution improve the effectiveness of ambulance and save lives.

- 10.1" 1920 x 1200 PCAP touchscreen (M101B)
- 10.1" 1280 x 800 PCAP touchscreen (M101BL)
- Intel® Celeron® N2930
- Windows 10/8/7

2MP webcam front camera

5MP rear camera with autofocus and LED flash

Glove/ Rain/ Stylus mode, support active pen

Wi-Fi, Bluetooth 4.0, GPS

USB3.0, 30-pin Combo conn (Giga-LAN or RS-232)

IP65 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistance

Operating temperature -10°C to 50°C

### Accessories

#### Standard

Adapter and Power Cord    Capacitive Stylus    Standard Battery

#### Optional

Desk Dock	Vehicle Dock (Without VGA output)	Vehicle Cradle	Battery Charger	Smart Card Reader
High Capacity Battery	Hand Strap	UHF RFID Reader	VESA Mount Kit	Shoulder Strap
Carry Bag	Micro HDMI Cable	Vehicle Charger	LAN Cable	RS-232 Cable

# 10.1" x86 Rugged Tablet

Intel® Celeron® N2930




Model Name	10.1"	10.1"
	M101B	M101BL
<b>Display</b>		
<b>Resolution</b>	1920 x 1200	1280 x 800
<b>Panel Brightness</b>	700 nits	350 nits
<b>Contrast Ratio</b>	800:1 (Typ.)	800:1 (Typ.)
<b>Viewing angle</b>	-89~89 (H) ; -89~89 (V)	-85~85 (H) ; -85~85 (V)
<b>Touch</b>	PCAP touchscreen	PCAP touchscreen
<b>System</b>		
<b>Processor</b>	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)
<b>Memory</b>	4GB SODIMM DDR3L-1600 (Up to 8GB)	4GB SODIMM DDR3L-1600 (Up to 8GB)
<b>Storage</b>	64GB mSATA SSD (Up to 256GB)	64GB mSATA SSD (Up to 256GB)
<b>OS</b>	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7 Windows 7 Pro for Embedded System	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows 7 Pro for Embedded System
<b>Wireless Communications</b>		
<b>WLAN</b>	802.11 a/b/g/n	802.11 a/b/g/n
<b>Bluetooth</b>	Bluetooth 4.0 + Class I	Bluetooth 4.0 + Class I
<b>WWAN</b>	Optional 4G	Optional 4G
<b>GNSS</b>	GPS	GPS
<b>Connectors</b>		
<b>Connectors</b>	1 x Micro HDMI, 1 x Giga-LAN or RS-232, 1 x USB3.0, 1 x Mic in/Line Out 1 x Power Jack, 1 x Micro SD Slot	1 x Micro HDMI, 1 x Giga-LAN or RS-232, 1 x USB3.0, 1 x (Mic in/Line Out), 1 x Power Jack, 1 x Micro SD Slot
<b>Audio</b>		
<b>Audio</b>	1 x Built-in Mic, 2 x 1W Speaker	1 x Built-in Mic, 2 x 1W Speaker
<b>User Controls</b>		
<b>Buttons</b>	1 x Power, 1 x Menu/Home, 2 x Programmable Function Keys, 1 x Volume up, 1 x Volume down	1 x Power, 1 x Menu/Home, 2 x Programmable Function Keys, 1 x Volume up, 1 x Volume down
<b>LED Indicator</b>	Power, Battery, HDD Access, RF	Power, Battery, HDD Access, RF
<b>Mechanical</b>		
<b>Dimensions</b>	271.8 x 197.2 x 19 mm	271.8 x 197.2 x 19 mm (10.7 x 7.76 x 0.75 inches)
<b>Net Weight</b>	1.2 kg (2.7 lbs)	1.2 kg (2.7 lbs)
<b>Environment</b>		
<b>Operating Temp.</b>	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)
<b>Humidity</b>	10% to 90% (Non-condensing, RH)	10% to 90% (Non-condensing, RH)
<b>IP Rating</b>	IP65	IP65
<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I
<b>Drop</b>	MIL-STD-810G Method 516.6, 4 ft to concrete	MIL-STD-810G Method 516.6, 4 ft to concrete
<b>Power</b>		
<b>Power Input</b>	12~19V DC	12~19V DC
<b>Battery</b>	7.4V, typ. 5140mAh Li-Polymer Battery (2S1P) 7.4V, typ. 10280mAh Li-Polymer Battery (2S2P, Optional)	7.4V, typ. 5140mAh Li-Polymer Battery (2S1P) 7.4V, typ. 10280mAh Li-Polymer Battery (2S2P, Optional)
<b>AC Adapter</b>	100~240V, 50-60Hz, 19V DC	100~240V, 50-60Hz, 19V DC
<b>Data Capture</b>		
<b>Camera</b>	Front: 2MP Webcam, Rear: 5MP with LED flash	Front: 2MP Webcam, Rear: 5MP with LED flash
<b>Integrated</b>	1D/2D Barcode Reader (Optional) HF/UHF RFID Reader (Optional)	1D/2D Barcode Reader (Optional) HF/UHF RFID Reader (Optional)
<b>Add-on Module</b>	Built-in Smart Card Reader (Optional)	-
<b>Certifications</b>		
<b>Safety</b>	CE, FCC, IC, UL 60950	CE, FCC, IC, UL 60950



# 10.1" x86 Rugged Tablet

## M101P/S Series

### Custom configuration

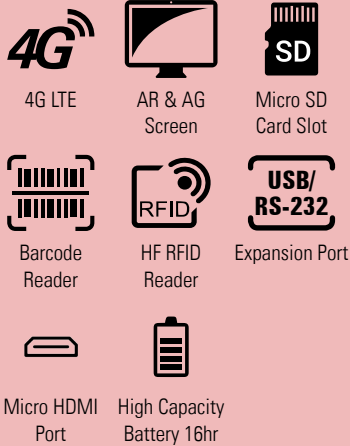

### Application



### Enterprise Mobility Solution

"LONG BATTERY LIFE AND VARIOUS DATA CAPTURE OPTIONS."

The 10.1" tablet featured customization in logo, housing, and packing. Users can use the mobile tablet to collect equipment information during daily facilities check. The Windows-based platform makes IT control easier.



**“ ROBUST TABLET TO WITHSTAND INDUSTRIAL USE. ”**

- 10.1" 1920 x 1200 PCAP touchscreen
- Intel® Pentium® N4200 (M101P)
- Intel® Core™ i5-7200U (M101S)
- Windows 10 IoT Enterprise

2MP webcam front camera

8MP rear camera with autofocus with LED flash

Glove/ Rain/ Stylus mode, support active pen

Wi-Fi, Bluetooth 5.0, GPS, GLONASS

USB 3.0 Type-A, USB 3.0 Type-C

IP65 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistance

Operating temperature -10°C to 50°C

Sunlight readable with anti-glare solution

### Accessories

#### Standard

Adapter and Power Cord    Capacitive Stylus    Standard Battery

#### Optional

Smart Card Reader (M101P)	Vehicle Dock (Without VGA output)	Vehicle Cradle	Battery Charger	Desk Dock
High Capacity Battery Carry Bag	Hand Strap Micro HDMI Cable	UHF RFID Reader Vehicle Charger	VESA Mount Kit	Shoulder Strap

# 10.1" x86 Rugged Tablet

Intel® Pentium® N4200

Intel® Core™ i5-7200U



Model Name	10.1" M101P	10.1" M101S
<b>Display</b>		
<b>Resolution</b>	1920 x 1200	1920 x 1200
<b>Panel Brightness</b>	800 nits	800 nits
<b>Contrast Ratio</b>	800:1 (Typ.)	800:1 (Typ.)
<b>Viewing angle</b>	-85~85 (H) ; -85~85 (V)	-85~85 (H) ; -85~85 (V)
<b>Touch</b>	PCAP touchscreen	PCAP touchscreen
<b>System</b>		
<b>Processor</b>	Intel® Pentium® N4200 (2M Cache, up to 2.5 GHz)	Intel® Core™ i5-7200U (3M Cache, up to 3.10 GHz)
<b>Memory</b>	4GB LPDDR4 (Up to 8GB)	4GB DDR4 SDRAM (Up to 16GB)
<b>Storage</b>	128GB SSD (Up to 512GB)	128GB SSD (Up to 512GB)
<b>OS</b>	Windows 10 IoT Enterprise	Windows 10 IoT Enterprise
<b>Wireless Communications</b>		
<b>WLAN</b>	802.11 a/b/g/n/ac WiFi	802.11 a/b/g/n/ac WiFi
<b>Bluetooth</b>	Bluetooth 5.0	Bluetooth 5.0
<b>WWAN</b>	Optional 4G LTE	Optional 4G LTE
<b>GNSS</b>	GPS, GLONASS	GPS, GLONASS
<b>Connectors</b>		
<b>Connectors</b>	1 x Micro HDMI, 1 x USB 3.0 (Type-A), 1 x USB 3.0 (Type-C), 1 x Audio Combo connector (Mic in or Line Out), 1 x Power jack, 1 x Expansion connector for USB 2.0 / Full RS232(Optional), 1 x Micro SD Card Slot, 1 x Micro SIM Card Slot, 1 x Mini PCIe for WWAN Module	1 x Micro HDMI, 1 x USB 3.0 (Type-A), 1 x USB 3.0 (Type-C), 1 x Audio Combo Conn. (Mic in or Line Out), 1 x Power Jack, 1 x Micro SD Card Slot, 1 x Micro SIM Card Slot, 1 x Mini PCIe for WWAN Module,
<b>Audio</b>		
<b>Audio</b>	2 x Built-in Mic with Noise Cancellation, 2 x 1W Speaker	2 x Built-in Digital Mic with Noise Cancellation, 2 x 1W Speaker
<b>User Controls</b>		
<b>Buttons</b>	1 x Power, 1 x Menu/ Home, 2 x Programmable Function Keys, 2 x Volume or Panel Brightness	1 x Power, 1 x Menu/Home, 2 x Programmable Function Keys, 2 x Volume or Panel Brightness
<b>LED Indicator</b>	Power, Battery, HDD, RF	Power, Battery, HDD, RF
<b>Mechanical</b>		
<b>Dimensions</b>	271.9 x 198.3 x 19.5 mm	271.8 x 197.2 x 21 mm
<b>Net Weight</b>	1.2 kg (2.65 lbs)	1.25 kg (2.75 lbs)
<b>Environment</b>		
<b>Operating Temp.</b>	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)
<b>Humidity</b>	10% to 90% (Non-condensing, RH)	10% to 90% (Non-condensing, RH)
<b>IP Rating</b>	IP65	IP65
<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I
<b>Drop</b>	MIL-STD-810G Method 516.6, 4 ft to concrete	MIL-STD-810G Method 516.6, 4 ft to concrete
<b>Power</b>		
<b>Power Input</b>	12~19V DC	12~19V DC
<b>Battery</b>	7.7V, typ. 5900mAh Li-Polymer Battery (2S1P) 7.4V, typ. 10280mAh Li-Polymer Battery (2S2P, Optional)	7.7V, typ. 5900mAh Li-Polymer Battery (2S1P) 7.4V, typ. 10280mAh Li-Polymer Battery (2S2P, Optional)
<b>AC Adapter</b>	100~240V, 50-60Hz/19V DC	100~240V, 50-60Hz/19V DC
<b>Data Capture</b>		
<b>Camera</b>	Front: 2MP, Rear: 8MP with LED flash	Front: 2MP, Rear: 8MP with LED flash
<b>Integrated</b>	Optional 1D/2D Barcode Reader Optional HF RFID Reader	Optional 1D/2D Barcode Reader Optional HF RFID Reader
<b>Add-on Module</b>	Optional add-on UHF RFID Reader or SmartCard Reader	-
<b>Certifications</b>		
<b>Safety</b>	CE, FCC	CE, FCC

# 10.1" Arm Rugged Tablet

## M101RK/M/Q Series

### Custom configuration



Barcode  
Reader



AR & AG  
Screen



Additional  
Storage



4G LTE



Micro SD  
Card Slot



Battery  
Hotswap



### Application



### Bingo Games Tablet

"TOUGH ENOUGH TO  
WITHSTAND REGULAR  
KNOCKS & DROPS."

A customer needed a tablet display to be single point with less sensitivity. Winmate had the solution. This 10.1" tablet not only meets the demand but is also rugged and durable enough to withstand regular drops.

**“ RUGGED ENOUGH TO  
WITHSTAND WEAR & TEAR. ”**

- 10.1" 1920 x 1200 PCAP touchscreen (M101RK, M101Q8)
- 10.1" 1280 x 800 PCAP touchscreen (M101M8)
- Arm Cortex-A72 + Arm Cortex-A53 (M101RK)
- Arm Cortex-A53 (M101M8)
- Qualcomm® Snapdragon™ 660 (M101Q8)

2MP front camera; 8MP rear camera with autofocus and LED flash (M101RK, M101M8)

8MP front camera; 13MP rear camera with autofocus and LED flash (M101Q8)

Wi-Fi, GPS, NFC, Bluetooth

4G LTE

USB OTG

IP65 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistance

Operating temperature -20°C to 60°C (M101RK, M101M8)

### Accessories

#### Standard

Adapter and Power Cord    Capacitive Stylus    Standard Battery

#### Optional

Desk Dock	Vehicle Dock	Vehicle Cradle	Battery Charger	Hand Strap
VESA Mount Kit	Carry Bag			

# 10.1" Arm Rugged Tablet

Arm Cortex-A72 + Arm Cortex-A53

Arm Cortex-A53

Qualcomm® Snapdragon™ 660



NEW



Q2, 2020

Model Name	10.1"	10.1"	10.1"
	M101RK	M101M8	M101Q8
<b>Display</b>			
<b>Resolution</b>	1920 x 1200	1280 x 800	1290 x 1200
<b>Panel Brightness</b>	800 nits	400 nits	800 nits
<b>Contrast Ratio</b>	800:1 (Typ.)	1000:1 (Typ.)	800:1 (Typ.)
<b>Viewing angle</b>	-85~85 (H) ; -85~85 (V)	-85~85 (H) ; -85~85 (V)	-85~85 (H) ; -85~85 (V)
<b>Touch</b>	PCAP touchscreen	PCAP touchscreen	PCAP touchscreen
<b>System</b>			
<b>Processor</b>	Arm Cortex-A72 (up to 2.0 GHz) + Arm Cortex-A53 (up to 1.5 GHz)	Arm Cortex-A53 (Octa-core 1.3 GHz)	Qualcomm® Snapdragon™ 660 (Octa-core up to 2.2 GHz)
<b>Memory</b>	2GB	2GB LPDDR3	3GB
<b>Storage</b>	16GB eMMC	16GB eMMC	32GB eMMC
<b>OS</b>	Android 7.1	Android 7.0	Android 9.0
<b>Wireless Communications</b>			
<b>WLAN</b>	802.11 a/b/g/n/ac	802.11 a/b/g/n	802.11 a/b/g/n/ac Wi-Fi
<b>Bluetooth</b>	Bluetooth 4.2	Bluetooth 4.1	Bluetooth 5.0
<b>WWAN</b>	Optional 3G/4G LTE	Optional 3G/4G LTE	Optional 3G/4G LTE
<b>GPS</b>	GPS / AGPS	GPS / AGPS	GPS / AGPS
<b>Connectors</b>			
<b>Connectors</b>	1 x Micro HDMI, 1 x USB 3.0 Type-C (OTG), 1 x USB 3.0 Type-A, 1 x Power Jack, 1 x Micro SD Slot, 1 x Audio Combo Conn. (Mic in/Line Out),	1 x USB OTG, 1 x Power Jack, 1 x Micro SD Card Slot, 1 x Audio Combo Conn. (Mic in/Line Out),	1 x USB3.0 Type-C (OTG), 1 x USB2.0 Type-A, 1 x Power Jack, 1 x Micro SD Card Slot, 1 x Micro SIM Card Slot
<b>Audio</b>			
<b>Audio</b>	1 x Built-in Mic, 2 x Built-in 1W Speaker	1 x Built-in Mic, 2 x Built-in 1W Speaker	2 x Digital Mic, 2 x 1w Sperate
<b>User Controls</b>			
<b>Buttons</b>	Power, Home, Back, Menu, Volume up and down	Power, Home, Back, Menu, Volume up and down	Power, Home, Back, Menu, Volume up and down
<b>LED Indicator</b>	Status Indicator	Status Indicator	Status Indicator
<b>Mechanical</b>			
<b>Dimensions</b>	271.9 x 198.2 x 19.5 mm	271.8 x 197.2 x 19 mm	271.9 x 198.2 x 19.5 mm
<b>Net Weight</b>	0.99 kg	1 kg	0.99 kg
<b>Environment</b>			
<b>Operating Temp.</b>	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)	-10°C to 50°C (AC mode), -10°C to 50°C (Battery mode)
<b>Humidity</b>	10% to 90% (Non-condensing, RH)	30% to 90% (Non-condensing, RH)	10% to 95% (Non-condensing, RH)
<b>IP Rating</b>	IP65	IP65	IP65
<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G M516.6
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G M514.6
<b>Drop</b>	MIL-STD-810G Method 516.6, 4 ft to concrete	MIL-STD-810G Method 516.6, 4 ft to concrete	MIL-STD-810G Method 516.6 Procedure I, 4 ft to concrete
<b>Power</b>			
<b>Power Input</b>	19V DC	12~19V DC	19V DC
<b>Battery</b>	7.4V, typ. 5140mAh Li-Polymer Battery (2S1P) (Optional hot-swap battery)	7.4V, typ. 5140mAh Li-Polymer Battery (2S1P) (Optional hot-swap battery)	7.4V, typ. 5140mAh Li-ion Battery (2S1P) (Optional hot-swap battery)
<b>Adapter</b>	110-240 AC to 19V DC out	100~240V/ 12V DC 3A	100~240 AC to 19V DC out
<b>Data Capture</b>			
<b>Camera</b>	Front: 2MP with built-in mic, Rear: 8MP with autofocus and LED flash	Front: 2MP with built-in mic, Rear: 8MP with autofocus and LED flash	Front: 8MP with built-in mic, Rear: 13MP with autofocus and LED flash
<b>Barcode</b>	Optional 1D/2D Barcode Reader	Optional 2D Barcode Reader	Optional 1D/2D Barcode Reader
<b>NFC</b>	Optional NFC Reader	Built in NFC Reader	Integrated NFC Module
<b>Certifications</b>			
<b>Safety</b>	CE, FCC	CE, FCC	CE, FCC



# 11.6" x86 Rugged Tablet

## M116P/K Series

### Custom configuration



4G LTE



AG Screen



Micro SD  
Card Slot



Barcode  
Reader



HF RFID  
Reader



Expansion Port



Micro HDMI



High Capacity  
Battery 16hr



Smart Card  
Reader



“ **COMBINATION OF  
RUGGEDNESS AND  
PERFORMANCE.** ”

### Application



### Warehouse Management

“TRUSTWORTHY  
PERFORMANCE  
ACROSS THE LOGISTICS  
ECOSYSTEM”

Purpose-built for warehouse, transportation, and field service applications, the M116 series ships with excellent performance, multiple wireless connectivity options and data capture modules for extraordinary performance. It permits all day use thanks to the hot-swappable battery design.

- 11.6" 1920 x 1080 PCAP touchscreen
- Intel® Pentium® N4200 (M116P)
- Intel® Core™ i5-7200U (M116K)
- Windows 10 IoT Enterprise

2MP front camera

8MP rear camera with autofocus and LED light

USB 3.0 (Type-A), USB 3.0 (Type-C)

Micro HDMI

RJ45 for Ethernet

Hot-swappable battery

Wi-Fi, Bluetooth, GPS, GLONASS

IP65 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistant

Operating temperature -20°C to 60°C

### Accessories

#### Standard

Adapter and Power Cord    Capacitive Stylus    Standard Battery

#### Optional

Desk Dock	Vehicle Dock	Vehicle Charger	Battery Charger	Shoulder Strap
Smart Card	UHF RFID Reader	High Capacity Battery	Hand Strap	VESA Mount Kit
Carry Bag/Reader	Micro HDMI Cable	USB-C to Ethernet Adapter	USB-C to RS232 Adapter	

# 11.6" x86 Rugged Tablet

Intel® Pentium® N4200

Intel® Core™ i5-7200U

NEW



NEW



Model Name	11.6" M116P	11.6" M116K
<b>Display</b>		
<b>Resolution</b>	1920 x 1080 Full HD	1920 x 1080 Full HD
<b>Panel Brightness</b>	850 nits with direct optical bonding for sunlight readability	850 nits with direct optical bonding for sunlight readability
<b>Contrast Ratio</b>	1000:1 (Typ.)	1000:1 (Typ.)
<b>Viewing angle</b>	-89~89 (H) ; -89~89 (V)	-89~89 (H) ; -89~89 (V)
<b>Touch</b>	PCAP touchscreen	PCAP touchscreen
<b>System</b>		
<b>Processor</b>	Intel® Pentium® N4200 (2M Cache, up to 2.5 GHz)	Intel® Core™ i5-7200U (3M Cache, up to 3.10 GHz)
<b>Memory</b>	4GB LPDDR4 RAM (Up to 8GB)	4GB DDR4 SDRAM (Up to 16GB)
<b>Storage</b>	128GB SSD (Options up to 512GB) Additional storage available with micro SDXC card slot	128GB SSD (Options up to 512GB) Additional storage available with micro SDXC card slot
<b>Graphics</b>	Intel® HD Graphics 504	Intel® HD Graphics 620
<b>OS</b>	Windows 10 IoT Enterprise (64 bit)	Windows 10 IoT Enterprise (64 bit)
<b>Sensors</b>	Light sensor/ g-sensor / Gyro / E-compass	Light sensor/ g-sensor / Gyro / E-compass
<b>Wireless Communications</b>		
<b>WLAN</b>	802.11 a/b/g/n/ac WiFi	802.11 a/b/g/n/ac WiFi
<b>Bluetooth</b>	Bluetooth 5.0	Bluetooth 5.0
<b>WWAN</b>	Optional 4G LTE	Optional 4G LTE
<b>GNSS</b>	GPS, GLONASS	GPS, GLONASS
<b>Connectors</b>		
<b>Connectors</b>	1 x 19-pin docking connector, 1 x micro HDMI, 1 x USB 3.0 (Type-A), 1 x USB 3.0 (Type-C), 1 x Power Jack, 1 x Micro SDXC slot, 1 x Micro SIM Card Slot, 1 x Audio combo connector (Mic in or Line Out), 1 x RJ45 10/100/1000 (Optional), 1 x Expansion connector for USB 2.0/ Full RS232 (Optional), 1 x Mini PCIe for WWAN Module	1 x 19-pin docking connector, 1 x micro HDMI, 1 x USB 3.0 (Type-A), 1 x USB 3.0 (Type-C), 1 x Power Jack, 1 x Micro SDXC slot, 1 x Micro SIM Card Slot, 1 x Audio combo connector (Mic in or Line Out), 1 x RJ45 10/100/1000 (Optional), 1 x Expansion connector for USB 2.0/ Full RS232 (Optional), 1 x Mini PCIe for WWAN Module
<b>Audio</b>		
<b>Audio</b>	Built-in dual digital mic with noise cancellation, 2 x 1 watt front-facing speakers	Built-in dual digital mic with noise cancellation, 2 x 1 watt front-facing speakers
<b>User Controls</b>		
<b>Physical Buttons</b>	1 x Power; 3 x function keys	1 x Power; 3 x function keys
<b>LED Indicator</b>	Power, Battery, HDD, RF	Power, Battery, HDD, RF
<b>Mechanical</b>		
<b>Dimensions</b>	300.67 x 201.97 x 22.5 mm	300.67 x 201.97 x 22.5 mm
<b>Net Weight</b>	1.35 kg	1.4 kg
<b>Environment</b>		
<b>Operating Temp.</b>	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)
<b>Humidity</b>	10% to 90% (Non-condensing, RH)	10% to 90% (Non-condensing, RH)
<b>IP Rating</b>	IP65 certified, dustproof and waterproof	IP65 certified, dustproof and waterproof
<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I
<b>Drop</b>	MIL-STD-810G Method 516.6, 4 ft to concrete	MIL-STD-810G Method 516.6, 4 ft to concrete
<b>Power</b>		
<b>Power Input</b>	19V DC	19V DC
<b>Battery</b>	Hot-swappable 7.7V typ. 5900mAh Li-Polymer Battery (2S1P) Optional 7.4V, typ. 10280mAh Li-Polymer Battery (2S2P)	Hot-swappable 7.7V typ. 5900mAh Li-Polymer Battery (2S1P) Optional 7.4V, typ. 10280mAh Li-Polymer Battery (2S2P)
<b>AC Adapter</b>	100-240V, 50-60Hz (19V DC)	100-240V, 50-60Hz (19V DC)
<b>Data Capture</b>		
<b>Camera</b>	Front: 2MP front camera Rear: 8MP rear camera with autofocus and LED light	Front: 2MP front camera Rear: 8MP rear camera with autofocus and LED light
<b>Integrated</b>	Optional 1D/2D Barcode Reader Optional HF RFID reader 13.56 MHz Optional Smart Card Reader	Optional 1D/2D Barcode Reader Optional HF RFID reader 13.56 MHz
<b>Add-on Module</b>	UHD RFID	Optional Smart Card Reader Optional UHD RFID
<b>Certifications</b>		
<b>Safety</b>	CE, FCC	CE, FCC







# ULTRA-RUGGED TABLET

## Ultra-Rugged Tablet

Overview . . . . . 47

## 8.4" x86 Ultra-Rugged Tablet

Intel Core i5 Series . . . . . 49

Intel Pentium N4200 Series . . . . . 51

## 10.4" x86 Ultra-Rugged Tablet

Intel Core i5 Series . . . . . 53

Intel Pentium N4200 Series . . . . . 55

## 13.3" x86 Ultra-Rugged Tablet

M133 Series . . . . . 57



# Ultra-Rugged Tablet

## Overview

With our increased reliance on computers monitoring car sensors and control systems, the entire automotive system must be designed to be safety-critical to ensure the safety of the driver, passengers, pedestrians and other vehicles. To improve the quality and reduce errors in these systems, automotive OEMs and suppliers require good diagnostic tools to detect and discover any faults that appear in automotive systems.

### Our ultra-rugged tablets include:

- The latest Windows® operating system
- Robust wireless communications
- Carry-around handle with rubber for easy grip

Winmate ultra-rugged tablets are designed to be carried around workshops and inspection stations with easy grip handles and sturdy kickstands. The large sunlight readable screen helps to ensure the right depiction of every diagram and spreadsheet. With waterproof, dustproof protection and designed to be ultra-reliable, Winmate's ultra-rugged tablets help you finish inspection tasks faster than ever in any condition.



## Technology



- **Ruggedness** – Apart from the magnesium aluminum housing with protective rubber, these ultra-rugged tablets are constructed with IP54/65 sealing. Meanwhile, they are MIL-STD-810G certified for shock, drop and vibration tolerance to withstand the harshest of environments and frequent drops, especially in dusty automotive manufacturing plants and vehicle diagnostic workshops.



- **Adjustable kickstand/handle** – Devices remaining handy and easy to use are essential for efficient workshop use. The M133K comes with an integrated kickstand while other ultra-rugged members can be customized with a kickstand/handle to allow for easy and variable positioning on any surface.

## Product Guide - Ultra-Rugged Tablet

Our product guide helps you to navigate and find the right product from our excessive product line.

### x86 Ultra-Rugged Tablet

			
<b>R08IH8M-RTU1GP/ R08IK8M-RTU1GP</b>	<b>R08IP8M-RTU1GP</b>	<b>R10IK8M-RTT2GP</b>	<b>M133 Series</b>
<b>p.49</b>	<b>p.51</b>	<b>p.53</b>	<b>p.57</b>

# 8.4" x86 Ultra-Rugged Tablet


## Intel Core i5 Series

### Custom configuration



**“ PORTABLE POWERFUL SOLUTION. ”**

### Application

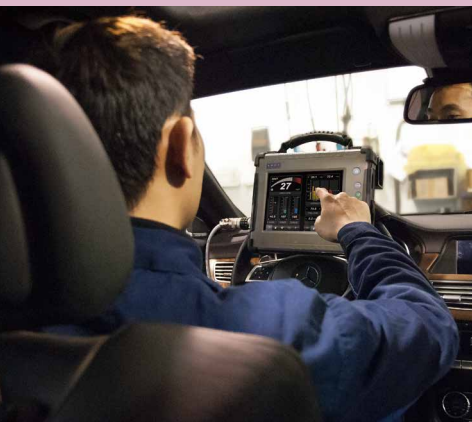

### Car Production Testing

**“SIMPLIFIES PRODUCTION PROCESS.”**

During the car assembly process operators attach the ultra-rugged tablet to the vehicle to conduct on-board tests with a special steering wheel mount.

- 8.4" anti-scratch resistive touchscreen
- Intel® Core™ i5-5250U (R08IH8M-RTU1GP)
- Intel® Core™ i5-7200U (R08IK8M-RTU1GP)
- Windows 10/8/7 (R08IH8M-RTU1GP)
- Windows 10 IoT Enterprise (R08IK8M-RTU1GP)

Easy-to-carry handle bar

USB 3.0

RS232, RJ45 for Ethernet

Wi-Fi, Bluetooth, GPS

IP54 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistance

Operating temperature -20°C to 60°C

### Accessories

#### Standard

Multi-functional Desktop Docking	Adjustable Kickstand	Vehicle Mounting Charger Kit	Car Power Charger	Handstrap
Spare Part Battery	Shoulder Handle (Carrying Belt)	Soft case	Carry Bag	

## 8.4" x86 Ultra-Rugged Tablet

Intel® Core™ i5-5250U

Intel® Core™ i5-7200U



NEW



Model Name	8.4"	8.4"
	R08IH8M-RTU1GP	R08IK8M-RTU1GP
<b>Display</b>		
<b>Resolution</b>	800 x 600	800 x 600
<b>Panel Brightness</b>	600 nits	600 nits
<b>Contrast Ratio</b>	600:1 (Typ.)	600:1 (Typ.)
<b>Touch</b>	Resistive touchscreen	Resistive touchscreen
<b>System</b>		
<b>Processor</b>	Intel® Core™ i5-5250U (3M Cache, up to 2.70 GHz)	Intel® Core™ i5-7200U (3M Cache, up to 3.10 GHz)
<b>Memory</b>	4GB SODIMM DDR3L-1600 (Max. 8GB)	4GB SODIMM DDR4-2133 (Max. 16GB)
<b>Storage</b>	64GB mSATA SSD (Max. 512GB)	128GB M.2 SSD (Max. 512GB). Optional NVME SSD up to 1TB.
<b>OS</b>	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7 Windows 7 Pro for Embedded System	Windows 10 IoT Enterprise
<b>Wireless Communications</b>		
<b>WLAN</b>	802.11 a/b/g/n/ac	802.11 a/b/g/n/ac
<b>Bluetooth</b>	Bluetooth 4.0	Bluetooth 5.0
<b>WWAN</b>	Optional 4G LTE	Optional 4G LTE
<b>GPS</b>	u-Blox Neo-6Q	u-Blox Neo-M8N
<b>Connectors</b>		
<b>Connectors</b>	2 x USB3.0, 1 x Audio Combo Conn. (Mic in or Line Out), 1 x Micro SD Card Slot, 1 x Micro SIM Card Slot, 1 x Power Jack, 1 x RS232/422/485 (Default RS232) 1 x RJ45 10/100/1000	2 x USB3.0, 1 x Audio Combo Conn. (Mic in or Line Out), 1 x Micro SD Card Slot, 1 x Micro SIM Card Slot, 1 x Power Jack, 1 x RS232/422/485 (Default RS232) 1 x RJ45 10/100/1000
<b>Audio</b>		
<b>Speaker</b>	2 x 1W Speaker	2 x 1W Speaker
<b>User Controls</b>		
<b>Buttons</b>	1 x Power, 1 x Menu, 3 x Function Key, 2 x Panel Brightness control key	1 x Power, 1 x Menu, 3 x Function Key, 2 x Panel Brightness control key
<b>LED Indicator</b>	Power, Battery, HDD, RF	Power, Battery, HDD, RF
<b>Mechanical</b>		
<b>Dimensions</b>	266 x 220 x 50.5 mm	266 x 220 x 50.5 mm
<b>Net Weight</b>	2.39kg	2.39kg
<b>Environment</b>		
<b>Operating Temp.</b>	-20°C to 60°C (AC Mode), -10°C to 50°C (Battery Mode)	-20°C to 60°C (AC Mode), -10°C to 50°C (Battery Mode )
<b>Humidity</b>	10% to 90% (Non-condensing, RH)	10% to 90% (Non-condensing, RH)
<b>IP Rating</b>	IP54	IP54
<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I
<b>Drop</b>	MIL-STD-810G Method 516.6, 4 ft to concrete	MIL-STD-810G Method 516.6, 4 ft to concrete
<b>Power</b>		
<b>Power Input</b>	19V DC	19V DC
<b>Battery</b>	11.1V, 5200mAh Lithium-Ion	11.1V, 5200mAh Lithium-Ion
<b>AC Adapter</b>	100~240V, 50~60Hz	100~240V, 50~60Hz
<b>Data Capture</b>		
<b>Barcode</b>	Barcode Resder (Optional)	Barcode Reader (Optional)
<b>Field service</b>		
<b>CAN Bus</b>	2ch CAN Bus(Optional)	2ch CAN Bus(Optional)
<b>Certifications</b>		
<b>Safety</b>	CE, FCC	CE, FCC



## Custom configuration



## Application



### Auto Repair Workshop

"WIRELESSLY RETRIEVE DIAGNOSTIC DATA."

Durable and portable, enabling users to connect easily to exchange diagnostics data.

# 8.4" x86 Ultra-Rugged Tablet Intel® Pentium® N4200 Series



**“ A POWER-EFFICIENT TERMINAL  
WITH HIGH MOBILITY ”**

- 8.4" anti-scratch resistive touchscreen
- Intel® Pentium® N4200
- Windows 10 IoT Enterprise

---

Easy-to-carry handle bar

---

---

USB 3.0

---

---

RS232, RJ45 for Ethernet

---

---

Wi-Fi, Bluetooth, GPS

---

---

IP54 waterproof and dustproof

---

---

MIL-STD-810G shock, vibration and drop resistance

---

---

Operating temperature -20°C to 60°C

---

## Accessories

### Standard

Multi-functional Desktop Docking	Adjustable Kickstand	Vehicle Mounting Charger Kit	Car Power Charger	Handstrap
Spare Part Battery	Shoulder Handle (Carrying Belt)	Soft case	Carry Bag	

## 8.4" x86 Ultra-Rugged Tablet

Intel® Pentium® N4200



Model Name	8.4" R08IP8M-RTU1GP
<b>Display</b>	
Resolution	800 x 600
Panel Brightness	600 nits
Contrast Ratio	600:1 (Typ.)
Touch	Resistive touchscreen
<b>System</b>	
Processor	Intel® Pentium® N4200 (2M Cache, up to 2.5 GHz)
Memory	4GB SODIMM DDR3L-1600 (Max. 8GB)
Storage	64GB M.2 SSD (Max. 512GB)
OS	Windows 10 IoT Enterprise
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 5.0
WWAN	Optional 4G LTE
GPS	u-Blox Neo-M8N
<b>Connectors</b>	
Connectors	2 x USB3.0, 1 x Audio Combo Conn. (Mic in or Line Out), 1 x Micro SD Card Slot, 1 x Micro SIM Card Slot, 1 x Power Jack, 1 x RS232/422/485 (Default RS232), 1 x RJ45 10/100/1000
<b>Audio</b>	
Speaker	2 x 1W Speaker
<b>User Controls</b>	
Buttons	1 x Power, 1 x Menu, 3 x Function Key, 2 x Panel Brightness control key
LED Indicator	Power, Battery, HDD, RF
<b>Mechanical</b>	
Dimensions	266 x 220 x 50.5 mm
Net Weight	2.39kg
<b>Environment</b>	
Operating Temp.	-20°C to 60°C (AC Mode), -10°C to 50°C (Battery Mode)
Humidity	10% to 90% (Non-condensing, RH)
IP Rating	IP54
Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 516.6, 4 ft to concrete
<b>Power</b>	
Power Input	19V DC
Battery	11.1V, 5200mAh Lithium-Ion
AC Adapter	100~240V, 50~60Hz
<b>Data Capture</b>	
Barcode	Barcode Reader (Optional)
<b>Field service</b>	
CAN Bus	2ch CAN Bus(Optional)
<b>Certifications</b>	
Safety	CE, FCC

# 10.4" x86 Ultra-Rugged Tablet Intel Core i5 Series

## Custom configuration



**“ PORTABLE POWERFUL SOLUTION. ”**

## Application



### Car Diagnostic Equipment

**“POWERFUL, COMPACT, AND RUGGED.”**

The device can serve as an auto repair computer that can check-in customers and create service documentation and to run parts management software programs.

- 10.4" anti-scratch resistive touchscreen
- Intel® Core™ i5-5250U (R10IH8M-RTT2GP)
- Intel® Core™ i5-7200U (R10IK8M-RTT2GP)
- Windows 10/8/7 (R10IH8M-RTT2GP)
- Windows 10 IoT Enterprise (R10IK8M-RTT2GP)

Easy-to-carry handle bar

USB 3.0

RS232, RJ45 for Ethernet

Wi-Fi, Bluetooth, GPS

IP54 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistance

Operating temperature -20°C to 60°C

## Accessories

### Standard

Multi-functional Desktop Docking	Adjustable Kickstand	Vehicle Mounting Charger Kit	Car Power Charger	Handstrap
Spare Part Battery	Shoulder Handle (Carrying Belt)	Soft case	Carry Bag	

# 10.4" x86 Ultra-Rugged Tablet

Intel® Core™ i5-5250U

Intel® Core™ i5-7200U



NEW



Model Name	10.4"	10.4"
	R10IH8M-RTT2GP	R10IK8M-RTT2GP
<b>Display</b>		
<b>Resolution</b>	1024 x 768	1024 x 768
<b>Panel Brightness</b>	700 nits	700 nits
<b>Contrast Ratio</b>	1000:1 (Typ.)	1000:1 (Typ.)
<b>Touch</b>	Resistive touchscreen	Resistive touchscreen
<b>System</b>		
<b>Processor</b>	Intel® Core™ i5-5250U (3M Cache, up to 2.70 GHz)	Intel® Core™ i5-7200U (3M Cache, up to 3.10 GHz)
<b>Memory</b>	4GB SODIMM DDR3L-1600 (Max. 8GB)	4GB SODIMM DDR4-2133 (Max. 16GB)
<b>Storage</b>	64GB mSATA SSD (Max. 512GB)	128GB M.2 SSD (Max. 512GB). Optional NVME SSD up to 1TB.
<b>OS</b>	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7 Windows 7 Pro for Embedded System	Windows 10 IoT Enterprise
<b>Wireless Communications</b>		
<b>WLAN</b>	802.11 a/b/g/n/ac	802.11 a/b/g/n/ac
<b>Bluetooth</b>	Bluetooth 4.0	Bluetooth 5.0
<b>WWAN</b>	Optional 4G LTE	Optional 4G LTE
<b>GPS</b>	u-Blox Neo-6Q	u-Blox Neo-M8N
<b>Connectors</b>		
<b>Connectors</b>	2 x USB3.0, 1 x Mic in or Line Out, 1 x Micro SD Card Slot, 1 x Micro SIM Card Slot, 1 x Power Jack, 1 x RS232/422/485 (Default RS232), 1 x RJ45 10/100/1000	2 x USB3.0, 1 x Mic in or Line Out, 1 x Micro SD Card Slot, 1 x Micro SIM Card Slot, 1 x Power Jack, 1 x RS232/422/485 (Default RS232), 1 x RJ45 10/100/1000
<b>Audio</b>		
<b>Speaker</b>	2 x 1W Speaker	2 x 1W Speaker
<b>User Controls</b>		
<b>Buttons</b>	1 x Power, 1 x Menu, 3 x Function Key, 2 x Panel Brightness Control Key	1 x Power, 1 x Menu, 3 x Function Key, 2 x Panel Brightness Control Key
<b>LED Indicator</b>	Power, Battery, HDD, RF	Power, Battery, HDD, RF
<b>Mechanical</b>		
<b>Dimensions</b>	266 x 220 x 50.5 mm	266 x 220 x 50.5 mm
<b>Net Weight</b>	2.39 kg	3.0 kg
<b>Environment</b>		
<b>Operating Temp.</b>	-20°C to 60°C (AC Mode), -10°C to 50°C (Battery Mode)	-20°C to 60°C (AC Mode), -10°C to 50°C (Battery Mode)
<b>Humidity</b>	10% to 90% (Non-condensing, RH)	10% to 90% (Non-condensing, RH)
<b>IP Rating</b>	IP54 (Optional IP65)	IP54 (Optional IP65)
<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I
<b>Drop</b>	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 516.6, 4 ft to concrete
<b>Power</b>		
<b>Power Input</b>	19V DC	19V DC
<b>Battery</b>	11.1V, 5200mAh Lithium-Ion	11.1V, 5200mAh Lithium-Ion
<b>AC Adapter</b>	100~240V, 50~60Hz	100~240V, 50~60Hz
<b>Data Capture</b>		
<b>Barcode</b>	Barcode Reader (Optional)	Barcode Reader (Optional)
<b>Field service</b>		
<b>CAN Bus</b>	2ch CAN Bus(Optional)	2ch CAN Bus(Optional)
<b>Certifications</b>		
<b>Safety</b>	CE, FCC	CE, FCC



## Custom configuration



## Application



### Bulldozer on AConstruction Site

"FOR EXTREME  
CONDITIONS."

Meets MIL-STD-810G quality standards for vibration, shock, and extremes of temperature to ensure a durable mobile computing experience in hazardous locations.

# 10.4" x86 Ultra-Rugged Tablet Intel Pentium N4200 Series



**“ A POWER-EFFICIENT TERMINAL  
WITH HIGH MOBILITY ”**

- 10.4" anti-scratch resistive touchscreen
- Intel® Pentium® N4200
- Windows 10 IoT Enterprise

---

Easy-to-carry handle bar

---

---

USB 3.0

---

---

RS232, RJ45 for Ethernet

---

---

Wi-Fi, Bluetooth, GPS

---

---

IP54 waterproof and dustproof

---

---

MIL-STD-810G shock, vibration and drop resistance

---

---

Operating temperature -20°C to 60°C

---

## Accessories

### Standard

Multi-functional Desktop Docking	Adjustable Kickstand	Vehicle Mounting Charger Kit	Car Power Charger	Handstrap
Spare Part Battery	Shoulder Handle (Carrying Belt)	Soft case	Carry Bag	

# 10.4" x86 Ultra-Rugged Tablet

Intel® Pentium® N4200



Model Name	10.4" R10IP8M-RTT2GP
<b>Display</b>	
Resolution	1024 x 768
Panel Brightness	700 nits
Contrast Ratio	1000:1 (Typ.)
Touch	Resistive touchscreen
<b>System</b>	
Processor	Intel® Pentium® N4200 (2M Cache, up to 2.5 GHz)
Memory	4GB SODIMM DDR3L-1600 (Max. 8GB)
Storage	64GB M.2 SSD (Max. 512GB)
OS	Windows 10 IoT Enterprise
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 5.0
WWAN	Optional 4G LTE
GPS	u-Blox Neo-M8N
<b>Connectors</b>	
Connectors	2 x USB3.0, 1 x Audio Combo Conn. (Mic in or Line Out), 1 x Micro SD Card Slot, 1 x Micro SIM Card Slot, 1 x Power Jack, 1 x RS232/422/485 (Default RS232), 1 x RJ45 10/100/1000
<b>Audio</b>	
Speaker	2 x 1W Speaker
<b>User Controls</b>	
Buttons	1 x Power, 1 x Menu, 3 x Function Key, 2 x Panel Brightness Control Key
LED Indicator	Power, Battery, HDD, RF
<b>Mechanical</b>	
Dimensions	266 x 220 x 50.5 mm
Net Weight	3.0 kg
<b>Environment</b>	
Operating Temp.	-20°C to 60°C (AC Mode), -10°C to 50°C (Battery Mode)
Humidity	10% to 90% (Non-condensing, RH)
IP Rating	IP54 (Optional IP65)
Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 516.6, 4 ft to concrete
<b>Power</b>	
Power Input	19V DC
Battery	11.1V, 5200mAh Lithium-Ion
AC Adapter	100~240V, 50~60Hz
<b>Data Capture</b>	
Barcode	Barcode Reader (Optional)
<b>Field service</b>	
CAN Bus	2ch CAN Bus(Optional)
<b>Certifications</b>	
Safety	CE, FCC

# 13.3" x86 Ultra-Rugged Tablet

## M133 Series

### Custom configuration



Barcode Reader



Smart Card Reader



HF RFID Reader



4G LTE



High Panel Brightness



Battery Hotswap



### Application



### Workshop Diagnostics

"PRODUCTIVE AND CONVINIENT TO CARRY AROUND WORKSHOP"

Up-to-date technical service information, installation instructions can be retrieved immediately from the cloud, always accessible test procedures.

**" INSPIRED BY CAR MECHANICS. DESIGNED FOR REPAIR SERVICES. „**

- 13.3" 1920 x 1080 PCAP touchscreen with optical bonding
- Intel® Core™ i5-5250U (M133W)
- Intel® Core™ i5-7200U (M133K)
- Intel® Core™ i5-8265U (M133WK)
- Windows 10 IoT Enterprise / Ubuntu 18.04

2MP webcam front camera, 5MP rear camera

Glove/Rain/Stylus Modes

Supports Active Stylus

USB 3.0, USB 2.0, USB Type-C

HDMI, RS232, RJ45 for Ethernet

Service Window (2 x M.2 SSD and 1 x mini PCIe)

WWAN, Bluetooth, GPS

IP65 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistance

Operating temperature -10°C to 50°C

### Accessories

#### Standard

Adapter and Power Cord	Stylus	Standard Battery	Stand with Integrated Handle
------------------------	--------	------------------	------------------------------

#### Optional

Desk Dock	VESA Mounting kit	VESA Mounting kit 2	Shoulder Strap	Battery Charger
RAM Mount Kit	Vehicle Charger			

# 13.3" x86 Ultra-Rugged Tablet

Intel® Core™ i5-5250U

Intel® Core™ i5-7200U

Intel® Core™ i5-8265U



Q2, 2020

Model Name	13.3" M133W	13.3" M133K	13.3" M133WK
<b>Display</b>			
<b>Resolution</b>	1920 x 1080	1920 x 1080	1920 x 1080
<b>Panel Brightness</b>	350 nits with optical bonding	350 nits with optical bonding, optional high Panel Brightness 600 nits	350 nits with optical bonding, optional high Panel Brightness 600 nits
<b>Contrast Ratio</b>	800:1 (Typ.)	800:1 (Typ.)	800:1 (Typ.)
<b>Viewing angle</b>	-85~85 (H) ; -85~85 (V)	-85~85 (H) ; -85~85 (V)	-85~85 (H) ; -85~85 (V)
<b>Sensors</b>	Light sensor, G sensor, Gyro, E-compass	Light sensor, G sensor, Gyro, E-compass	Light sensor, G sensor, Gyro, E-compass
<b>Touch</b>	PCAP touchscreen with Glove/Rain/Stylus mode	PCAP touchscreen with Glove/Rain/Stylus mode	PCAP touchscreen with Glove/Rain/Stylus mode
<b>System</b>			
<b>Processor</b>	Intel® Core™ i5-5250U (3M Cache, up to 2.70 GHz)	Intel® Core™ i5-7200U (3M Cache, up to 3.10 GHz)	Intel® Core™ i5-8265U (6M Cache, up to 3.90 GHz)
<b>Memory</b>	4GB SODIMM DDR3L-1600 (Up to 16GB)	4GB SODIMM DDR4-2400 (Up to 16GB)	4GB SODIMM DDR4-2400 (Up to 16GB)
<b>Storage</b>	1 x 128GB M.2 SSD, (Up to 1TB with 2 Internal SSD Slot)	1 x 128GB Optional M.2 SSD (Up to 1TB with 2 Internal SSD Slot)	1 x 128GB Optional M.2 SSD (Up to 1TB with 2 Internal SSD Slot)
<b>OS</b>	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7 Windows 7 Pro for Embedded System Optional Ubuntu 18.04	Windows 10 IoT Enterprise Optional Ubuntu 18.04	Windows 10 IoT Enterprise Optional Ubuntu 18.04
<b>Wireless Communications</b>			
<b>WLAN</b>	802.11 a/b/g/n/ac (M.2)	802.11a/b/g/n/ac (M.2)	802.11a/b/g/n/ac (M.2)
<b>Bluetooth</b>	Bluetooth 4.2 Dual Mode (Classic + Low Energy) (M.2)	Bluetooth 5.0 (M.2)	Bluetooth 5.0 (M.2)
<b>WWAN</b>	Optional 4G	Optional 4G	Optional 4G
<b>GPS</b>	GPS	GPS, GLONASS	GPS, GLONASS
<b>Connectors</b>			
<b>Connectors</b>	1 x HDMI, 1 x RJ45 10/100/1000, 1 x Serial Com Port, 2 x USB 3.0, 2 x USB 2.0, 1 x SD Card Slot, 1x Power (DC in), 1 x Docking, 1 x Headphone Combo, 1 x Service Windows (Access to 2 x M.2 SSD cards and 1 x mini PCI-e WWAN card), 1 x Optional Expansion Window (Smart Card Reader/Barcode)	1 x HDMI, 1 x RS232, 1 x RJ45 10/100/1000, 2 x USB 3.0, 2 x USB 2.0, 1 x USB 3.1 Type-C (Gen1), 1 x Power (DC in), 1 x Micro SD Slot, 1 x Headphone Combo Jack, 1 x Service Windows (Access to 1 x mini PCI-e WWAN card), 1 x Optional Expansion Window (Smart Card Reader/ Barcode)	1 x HDMI, 1 x RS232, 1 x RJ45 10/100/1000, 2 x USB 3.0, 2 x USB 2.0, 1 x USB 3.1 Type-C (Gen1), 1 x Power (DC in), 1 x Micro SD Slot, 1 x Headphone Combo Jack, 1 x Service Windows (Access to 1 x mini PCI-e WWAN card), 1 x Optional Expansion Window (Smart Card Reader/ Barcode)
<b>Audio</b>			
<b>Audio</b>	1 x Built-in Digital Mic with Noise Cancellation, 2 x 1W Speaker	1 x Built-in Digital Mic with Noise Cancellation, 2 x 1W Speaker	1 x Built-in Digital Mic with Noise Cancellation, 2 x 1W Speaker
<b>User Controls</b>			
<b>Buttons</b>	1 x Power, 1 x Menu, 3 x function key, 2 x Volume Key	1 x Power, 1 x Menu, 3 x function key, 2 x Volume Key	1 x Power, 1 x Menu, 3 x function key, 2 x Volume Key
<b>LED indicator</b>	Power, Battery, SSD, RF	Power, Battery, SSD, RF	Power, Battery, SSD, RF
<b>Mechanical</b>			
<b>Dimensions</b>	338.2 x 240 x 30 mm	338.2 x 240 x 30 mm	338.2 x 240 x 30 mm
<b>Net Weight</b>	2.4 Kg (Without Kickstand), 2.8 Kg (With Kickstand)	2.4 Kg (Without Kickstand), 2.8 Kg (With Kickstand)	2.4 Kg (Without Kickstand), 2.8 Kg (With Kickstand)
<b>Environment</b>			
<b>Operating Temp.</b>	-10°C to 50°C	-10°C to 50°C	-10°C to 50°C
<b>Humidity</b>	30% to 80% (Non-condensing, RH)	30% to 80% (Non-condensing, RH)	30% to 80% (Non-condensing, RH)
<b>IP Rating</b>	IP65	IP65	IP65
<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure	MIL-STD-810G Method 514.6 Procedure	MIL-STD-810G Method 514.6 Procedure
<b>Drop</b>	MIL-STD-810G Method 516.6, 4 ft to concrete	MIL-STD-810G Method 516.6, 4 ft to concrete	MIL-STD-810G Method 516.6, 4 ft to concrete
<b>Power Requirements</b>			
<b>Power Input</b>	12~19V DC	12~19V DC	12~19V DC
<b>Battery</b>	7.4V, 10280mAh (Typ.) Li-Polymer (2S2P), Hot-Swap (Optional)	7.4V, 10280mAh (Typ.) Li-Polymer (2S2P), Hot-Swap (Optional)	7.4V, 10280mAh (Typ.) Li-Polymer (2S2P), Hot-Swap (Optional)
<b>AC Adapter</b>	100~240V, 50~60Hz	100~240V, 50~60Hz	100~240V, 50~60Hz
<b>Data Capture</b>			
<b>RFID</b>	HF RFID Reader (Optional) (ISO15693, ISO14443A, ISO18092)	HF RFID Reader (Optional) (ISO15693, ISO14443A, ISO18092)	HF RFID Reader (Optional) (ISO15693, ISO14443A, ISO18092)
<b>Barcode Reader</b>	1D/2D barcode reader (Optional)	1D/2D barcode reader (Optional)	1D/2D barcode reader (Optional)
<b>Smart Card Reader</b>	Built-in smart card reader (Optional)	Built-in smart card reader (Optional)	Built-in smart card reader (Optional)
<b>Camera</b>	Rear: 5MP auto-focus camera with LED flash, Front: 2MP camera	Rear: 5MP auto-focus camera with LED flash, Front: 2MP camera	Rear: 5MP auto-focus camera with LED flash, Front: 2MP camera
<b>Certification</b>			
<b>Safety</b>	CE, FCC, IC, UL	CE, FCC, IC, UL	CE, FCC, IC, UL







# VEHICLE MOUNTED COMPUTER

## Vehicle Mounted Computer

Overview .....	61
Product Overview .....	62

## FM Series

### 7" Vehicle Mounted Computer

x86 Vehicle Mounted Computer .....	63
Arm Vehicle Mounted Computer .....	65

### 8" Vehicle Mounted Computer

x86 Vehicle Mounted Computer .....	67
------------------------------------	----

### 10.4" Vehicle Mounted Computer

x86 Vehicle Mounted Computer .....	69
Arm Vehicle Mounted Computer .....	71

## G-WIN VM Series

### 10.1"~15" Vehicle Mounted Computer

x86 Vehicle Mounted Compute .....	73
-----------------------------------	----

### 7"~15" Vehicle Mounted Computer

Arm Vehicle Mounted Compute .....	75
-----------------------------------	----

### 8.4" Vehicle Mounted Computer

x86 Vehicle Mounted Computer .....	77
------------------------------------	----

### 10.4" Vehicle Mounted Computer

x86 Vehicle Mounted Computer .....	79
------------------------------------	----

### 12.1" Vehicle Mounted Computer

x86 Vehicle Mounted Computer .....	81
------------------------------------	----

### 15" Vehicle Mounted Computer

x86 Vehicle Mounted Computer .....	83
------------------------------------	----



# Vehicle Mounted Computer

## Overview

In the warehouse environment, the ability to mount mobile devices and computers to forklifts, trucks, taggers, and inventory pickers is essential for productivity purposes. From inventory management to order fulfillment, asset tracking, shipping and receiving, the warehouse floor is complex ecosystem that requires highly efficiency technology to keep things running smoothly.

### Our vehicle mount computers include:

- The latest Android™ or Windows® operating system
- Robust wireless communications
- Vehicle mounting solutions

Winmate's full line of rugged vehicle-mount computers, designed to fit seamlessly into forklifts and other warehouse vehicles will help minimize errors, streamline ordering and inventory management, and improve operational efficiencies.



## Product Overview

Winmate offers advanced platform Android and Windows vehicle mount computers with application-focused features such as wireless communications, external antennas, wide power input and ignition control.

All the devices are rugged, waterproof and vibration resistant to meet the daily challenges of warehouse operations.

## Technology



- **Ruggedness** – Winmate Vehicle mounted computers are rugged enough to handle any industrial environment from extreme cold to dry heat, potential drop and strong vibration from the moving vehicle. To withstand these conditions, industrial grade computers have a high IP rating indicating water and dust resistance, fanless thermal solution and industrial-grade internal components.



- **Driver's safety and security** – Nothing should distract a forklift operator driving around warehouse facilities. Screen blanking is a function that automatically disables the screen while the vehicle is moving. Also when the computer is left idling, the screen will automatically lock itself for security reasons.



- **Ability to connect multiple peripherals** – Barcode scanners, mobile printers, USB drives, external PC and monitor, all of these peripherals need to be connected to forklift computers from time to time. Various input and output interfaces onboard open more possibilities for the computer.



- **User-friendly interface** – Computers come with responsive touchscreens for the convenience of the operator. Resistive is usually more resistant to scratches while projected capacitive offers multitouch capabilities for more responsive applications.

## Product Guide

### x86 Vehicle Mount Computer

		
<b>FM07</b> p.63	<b>FM08</b> p.67	<b>FM10</b> p.69

### Arm Vehicle Mount Computer

		
<b>FM07A</b> p.65	<b>FM10A</b> p.72	<b>FM10Q</b> p.72

7"

8"

8.4"

10.4"

12.1"

15"

19"



# 7" x86 Vehicle Mounted Computer FM07

## Custom configuration



GPS



4G LTE



External  
Antenna



Additional  
Storage



Additional  
Memory



E13

**“ IN-VEHICLE SOLUTION IN A  
COMPACT FORM FACTOR. ”**

- 7" 1024 x 600 PCAP touchscreen
- Intel® Celeron® N3350 (Optional N4200)
- Windows 10 IoT Enterprise, Ubuntu 18.04

64GB M.2 SSD

Bluetooth 4.0

Wi-Fi, GPS

RAM mount, VESA mount

MIL-STD-810G shock, vibration and drop resistant

Power input 9~36V DC with ignition control

IP65 waterproof and dustproof

Wide operating temperature -20 to 60°C

## Accessories

### Standard

M12 Power Cable  
Wi-Fi Antenna

M12 LAN Cable

USB Cable

RS232 Cable

CAN Bus Cable

### Optional

Audio Cable

Mounting Kit 1-No  
Drill Solution  
GPS Antenna

Mounting Kit 2-Drill  
Solution

Mounting Kit 3-KeyBoard Mounting

WWAN Antenna

## Application



### Cargo Truck Navigation

**"IMPROVE EFFICIENCY  
OF ROAD CARGO."**

Compact 7" vehicle mount computer equipped with external WWAN and GPS antennas allow operator to monitor the location and delivery status of the truck. Using connectivity, truck drivers on remote roads can communicate with each other and with operations HQ.

# 7" x86 Vehicle Mounted Computer

Intel® Celeron® N3350 (Optional N4220)



Model Name	7"
	FM07
<b>Display</b>	
Resolution	1024 x 600
Panel Brightness	1000 nits
Contrast Ratio	700:1
Viewing angle	-75~75 (H) ; -70~75 (V)
Touch	PCAP touchscreen with optional protection glass
<b>System</b>	
Processor	Intel® Celeron® N3350 (2M Cache, up to 2.4 GHz) (Optional N4200)
Memory	2GB DDR3L 1600 SODIMM (Max. 8GB)
Storage	64GB M.2 SSD (Up to 256GB)
OS	Windows 10 IoT Enterprise, Ubuntu 18.04
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 4.0
WWAN	Optional LTE : B1/B2/B3/B4/B5/B7/B8/B13/B17/B20 WCDMA/HSDPA/HSUPA/HSPA+ :850 MHz/900 MHz/1700 MHz (AWS)/1900 MHz/ 2100 MHz GPRS/EDGE
GPS	u-Blox Neo-M8N Optional GPS Antenna
<b>Connectors</b>	
Computer	1 x RS232, 1 x Gigabit Ethernet LAN 10/100/1000 Mbps (M12 type), 1 x Power input 9-36V DC with ignition control, 1 x Micro SIM Card Slot, 2 x USB, 5 x DI, 3 x DO, 2 x CAN Bus, Wi-Fi Antenna, Bluetooth Antenna, WWAN Antenna (Optional), GPS Antenna (Optional)
Dock	N/A
<b>Mechanical</b>	
Dimensions	188.75 x 144.75 x 39.5 mm (7.43 x 5.70 x 1.56 inches)
Mounting	RAM Mount, VESA Mount (75 x 75 mm)
Net Weight	1.0 kg (2.20 lbs)
<b>Environment</b>	
Operating Temp.	-20°C to 60°C (-4° to 140°F)
Humidity	10% to 95% (Non-condensing, RH)
IP Rating	Full IP65
Shock	Compliant with MIL-STD-810G Method 516.6 Procedure I
Vibration	Compliant with MIL-STD-810G Method 514.6 Procedure I
<b>Power</b>	
Power Input	9~36V DC (M12 type) with ignition control
Battery	N/A
<b>Data Capture</b>	
Camera	N/A
<b>Certifications</b>	
Safety	CE, FCC, E-Mark

7"

8"

8.4"

10.4"

12.1"

15"

19"

# 7" Arm Vehicle Mounted Computer FM07A

## Custom configuration



GPS



4G LTE



External  
Antenna



E13

“ **COMPACT ANDROID  
VEHICLE COMPUTER.** ”

## Application



### Forklift Automation

“COMPACT AND RUGGED.  
IDEAL FOR SMALL SIZE  
FORKLIFT.”

Compact 7" vehicle mount computer FM07A gives forklift operator ability to monitor the lpick-up and drop-off location and optimizes in-house routes for faster and more precise delivery.

- 7" 1024 x 600 PCAP touchscreen
- Arm Cortex-A9
- Android 6.0

1GB LPDDR3, 16GB eMMC

Bluetooth 4.0

Wi-Fi, GPS

RAM mount, VESA mount

MIL-STD-810G shock, vibration and drop resistance

Power input 9~24V DC with ignition control

IP65 waterproof and dustproof

Wide operating temperature -20 to 60°C

## Accessories

### Standard

M12 Power Cable  
Wi-Fi Antenna

M12 LAN Cable

USB Cable

RS232 Cable

CAN Bus Cable

### Optional

Audio Cable

Mounting Kit 1-No  
Drill Solution

Mounting Kit 2-Drill  
Solution

Mounting Kit 3-KeyBoard Mounting

WWAN Antenna

GPS Antenna

# 7" Arm Vehicle Mounted Computer

Arm Cortex-A9



Model Name	7"
	FM07A
<b>Display</b>	
Resolution	1024 x 600
Panel Brightness	1000 nits
Contrast Ratio	700:1
Viewing angle	-75~75 (H) ; -70~75 (V)
Touch	PCAP touchscreen with optional protection glass
<b>System</b>	
Processor	Arm Cortex-A9 (1 GHz to 1.6 GHz)
Memory	1GB LPDDR3
Storage	16GB eMMC
OS	Android 6.0
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 4.0
WWAN	Optional LTE : B1/B2/B3/B4/B5/B7/B8/B13/B17/B20 WCDMA/HSDPA/HSUPA/HSPA+ : 850 MHz/900 MHz/1700 MHz (AWS)/1900 MHz/ 2100 MHz GPRS/EDGE
GPS	u-Blox Optional GPS Antenna
<b>Connectors</b>	
Computer	1 x RS232, 1 x Gigabit Ethernet LAN 10/100/1000 Mbps (M12 type), 1 x Power input 9~24V DC with ignition control, 1 x Micro SIM Card Slot, 2 x USB, 5 x DI, 3 x DO, 2 x CAN Bus, Wi-Fi Antenna, Bluetooth Antenna, WWAN Antenna (Optional), GPS Antenna (Optional)
Dock	N/A
<b>Mechanical</b>	
Dimensions	189.93 x 145.93 x 39.8 mm
Mounting	RAM Mount, VESA Mount (75 x 75 mm)
Net Weight	1.0 kg (2.20 lbs)
<b>Environment</b>	
Operating Temp.	-20°C to 60°C (-4° to 140°F)
Humidity	10% to 95% (Non-condensing, RH)
IP Rating	Full IP65
Shock	Compliant with MIL-STD-810G Method 516.6 Procedure I
Vibration	Compliant with MIL-STD-810G Method 514.6 Procedure I
<b>Power</b>	
Power Input	9~24V DC (M12 type) with ignition control
Battery	N/A
<b>Data Capture</b>	
Camera	N/A
<b>Certifications</b>	
Safety	CE, FCC, E-Mark



# 8" x86 Vehicle Mounted Computer FM08 Series

## Custom configuration



GPS



4G LTE



External  
Antenna



Additional  
Storage



Additional  
Memory



**“ QWERTY KEYPAD TO INPUT  
DATA IN ANY CONDITIONS. ”**



## Distribution Center

**“IMPROVES OPERATOR  
PRODUCTIVITY.”**

The FM08 helps to handle the challenges of the modern warehouse even in cold storage environments. QWERTY keypad allows easy typing even while wearing thick gloves. Detachable front panel provides mobility to forklift operator to perform tasks out of the forklift.

- 8" 800 x 480 with resistive touchscreen
- QWERTY keypad
- Intel Atom® E3845
- Windows 10/8/7

4GB SODIMM DDR3L-1600

64GB M.2 SSD

Wi-Fi, GPS, Bluetooth 4.0

2MP webcam camera

Screen blanking function for safety

RAM mount, VESA mount

Field replaceable front panel

MIL-STD-810G shock, vibration and drop resistance

Power input 10~60V DC with ignition control

IP65 waterproof and dustproof

Wide operating temperature -30 to 50°C

## Accessories

### Standard

Power Cable with Fuse  
External Antenna Fixing  
Bracket

Wi-Fi Antenna x 2  
Power Converter  
Cable

Quick Start Guide  
Adapter

USB Cable

Driver CD

### Optional

DC Power Jack Cable  
WWAN Antenna x 2  
Drill Mounting Kit

No Drill Mounting Kit  
Key for Vehicle dock  
Keyboard Mounting

RS232 Cable  
Stylus Kit + Screw  
UHF Fixed Reader

Audio Cable  
Fuse Kit  
Antenna

CAN Bus Cable  
Adapter  
LAN Cable

# 8" x86 Vehicle Mounted Computer

Intel Atom® E3845



Model Name	8"
	FM08
<b>Display</b>	
Resolution	800 x 480
Panel Brightness	500 nits
Contrast Ratio	1100:1
Viewing angle	-80~80 (H) ; -80~80 (V)
Sensors	G-sensor, Light-sensor
Touch	Anti-scratch Resistive touchscreen, support stylus
<b>System</b>	
Processor	Intel Atom® E3845 (2M Cache, 1.91 GHz)
Memory	4GB SODIMM DDR3L-1600 (Up to 8GB)
Storage	64GB M.2 SSD (Up to 256GB)
OS	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 4.0
WWAN	Optional 4G (LTE, HSPA+, GSM/GPRS/EDGE, EV-DO Rev A, 1 x RTT), Optional 3G (HSPA+, GSM/GPRS/EDGE)
GPS	u-blox NEO-6Q (located at the vehicle dock)
<b>Connectors</b>	
Computer	1 x Micro SIM Card Slot, 1 x Micro SD Card Slot, 1 x USB 3.0, 1 x 12V DC power input jack
Dock	1 x COM 1, 1 x COM 2, 1 x DB9 for USB port (Support 2 x USB2.0), 1 x CAN Bus/AUDIO, 1 x 400Mbps LAN port (Optional PoE, support 802.3at Type 2, 1 x Power, SMA Connector for external antenna (WiFi, Optional GPS, Optional WWAN)
<b>Mechanical</b>	
Dimensions	Computer: 268 x 214 x 32 mm, Docking: 202 x 245 x 52 mm
Net Weight	Computer 1.6 kg and Docking 1.6 kg
<b>Environment</b>	
Operating Temp.	-30°C to 50°C (-22° to 122°F)
Humidity	5% to 95% (Non-condensing, RH)
IP Rating	IP65
Impact	Support EN62262 IK07 rating
Shock	Compliant with MIL-STD-810G Method 516.6 Procedure I
Vibration	Compliant with MIL-STD-810G Method 514.6 Procedure I
<b>Power</b>	
Power Input	10~60V with isolation power and ignition control
Battery	7.6V typ. 3800mAh Li-Polymer Battery (2S1P)
<b>Data Capture</b>	
Camera	Front: 2MP camera
<b>Certifications</b>	
Safety	CE, FCC, UL60950-1, EN60950-1

7"

8"

8.4"

10.4"

12.1"

15"

19"

# 10.4" x86 Vehicle Mounted Computer FM10 Series

## Custom configuration



GPS



4G LTE



External  
Antenna



Additional  
Storage



Additional  
Memory

## Application



### Intermodal Facility Solution

"IMPROVE OPERATIONAL  
EFFICIENCY."

Winmate's VMC solution can be compatible with old peripherals with various I/O ports; the ability lock the touch screen and dim the display when the vehicle is moving, allons for safe vehicle operations.



**" FITS SEAMLESSLY INTO  
WAREHOUSE VEHICLES. ",**

- 10.4" 1024 x 768 resistive touchscreen
- Intel Atom® E3845
- Windows 10/8/7

4GB SODIMM DDR3L-1600

64GB M.2 SSD

Wi-Fi, GPS, Bluetooth 4.0

2MP webcam camera

Screen blanking function for safety

RAM mount, VESA mount

Field replaceable front panel

MIL-STD-810G shock, vibration and drop resistance

Power input 10~60V DC with ignition control

IP65 waterproof and dustproof

Wide operating temperature -30 to 50°C

## Accessories

### Standard

Power Cable with Fuse  
External Antenna Fixing  
Bracket

Wi-Fi Antenna x 2  
Power Converter  
Cable

Quick Start Guide  
Adapter

USB Cable

Driver CD

### Optional

DC Power Jack Cable  
WWAN Antenna x 2  
Drill Mounting Kit

No Drill Mounting Kit  
Key for Vehicle dock  
Keyboard Mounting

RS232 Cable  
Stylus Kit + Screw  
UHF Fixed Reader

Audio Cable  
Fuse Kit  
Antenna

CAN Bus Cable  
Adapter  
LAN Cable

# 10.4" x86 Vehicle Mounted Computer

Intel Atom® E3845



Model Name	10.4"
	FM10
<b>Display</b>	
Resolution	1024 x 768
Panel Brightness	400 nits
Contrast Ratio	1200:1
Viewing angle	-88~88 (H) ; -88~88 (V)
Sensors	G-sensor, Light-sensor
Touch	Anti-scratch Resistive touchscreen, support stylus
<b>System</b>	
Processor	Intel Atom® E3845 (2M Cache, 1.91 GHz)
Memory	4GB SODIMM DDR3L-1600 (Up to 8GB)
Storage	64GB M.2 SSD (Up to 256GB)
OS	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 4.0
WWAN	Optional 4G (LTE, HSPA+, GSM/GPRS/EDGE, EV-DO Rev A, 1 x RTT), Optional 3G (HSPA+, GSM/GPRS/EDGE)
GPS	u-blox NEO-6Q (located at the vehicle dock)
<b>Connectors</b>	
Computer	1 x Micro SIM Card Slot, 1 x Micro SD Card Slot, 1 x USB 3.0, 1 x 12V DC power input jack
Dock	1 x COM 1, 1 x COM 2, 1 x DB9 for USB port (Support 2 x USB2.0), 1 x CAN Bus/AUDIO, 1 x 400Mbps LAN port (Optional PoE) 802.3at Type 2, 1 x Power, SMA Connector for external antenna (WiFi, Optional GPS, Optional WWAN)
<b>Mechanical</b>	
Dimensions	Computer: 268 x 214 x 35 mm Docking: 202 x 245 x 52 mm
Net Weight	Computer 1.7kg and Docking 1.6kg
<b>Environment</b>	
Operating Temp.	-30°C to 50°C (-22° to 122°F)
Humidity	5% to 95% (Non-condensing, RH)
IP Rating	IP65
Impact	Support EN62262 IK07 rating
Shock	Compliant with MIL-STD-810G Method 516.6 Procedure I
Vibration	Compliant with MIL-STD-810G Method 514.6 Procedure I
<b>Power</b>	
Power Input	10~60V with isolation power and ignition control
Battery	7.6V typ. 3800mAh Li-Polymer Battery (2S1P)
<b>Data Capture</b>	
Camera	Front: 2MP camera
<b>Certifications</b>	
Safety	CE, FCC, UL60950-1, EN60950-1, PTCRB

7"

8"

8.4"

10.4"

12.1"

15"

19"



# 10.4" Arm Vehicle Mounted Computer FM10A/Q Series

## Custom configuration



GPS



4G LTE



External  
Antenna



## Application



### Warehouse

"MEETING A VARIETY  
OF CUSTOMER  
OBLIGATIONS."

Winmate FM10A is one of the first vehicle mount computers with Android operating system on the market. Android platform allows for the fast development of a variety of customized applications to satisfy warehouse needs.

**“ FOR YOUR UNIQUE ANDROID  
IN-VEHICLE APPLICATION. ”**

- 10.4" 1024 x 768 PCAP touchscreen
- Arm Cortex-A9 (FM10A)
- Qualcomm® Snapdragon™ 660 (FM10Q)
- Android 6.0 (FM10A)
- Android 9.0 (FM10Q)

Wi-Fi, GPS, Bluetooth

2MP web camera

Screen blanking function for safety

RAM mount, VESA mount

Field replaceable front panel

MIL-STD-810G shock, vibration and drop resistance

Power input 10~60V DC with ignition control

IP65 waterproof and dustproof

Wide operating temperature -30 to 50°C

## Accessories

### Standard

Power Cable with Fuse  
External Antenna Fixing  
Bracket

Wi-Fi Antenna x 2  
Power Converter  
Cable

Quick Start Guide  
Adapter

USB Cable

Driver CD  
(Only FM10A)

### Optional

DC Power Jack Cable  
WWAN Antenna x 2  
Drill Mounting Kit

No Drill Mounting Kit  
Key for Vehicle dock  
Keyboard Mounting

RS232 Cable  
Stylus Kit + Screw  
UHF Fixed Reader

Audio Cable  
Fuse Kit  
Antenna

CAN Bus Cable  
Adapter  
LAN Cable

# 10.4" Arm Vehicle Mounted Computer

Arm Cortex-A9

Qualcomm® Snapdragon™ 660



NEW



Q2, 2020

Model Name	10.4"	10.4"
	FM10A	FM10Q
<b>Display</b>		
Resolution	1024 x 768	1024 x 768
Panel Brightness	400 nits	400 nits
Contrast Ratio	1200:1	1200:1
Viewing angle	-88~88 (H) ; -88~88 (V)	-88~88 (H) ; -88~88 (V)
Sensors	G-sensor, Light-sensor	G-sensor, Light-sensor, Temp-Sensor
Touch	PCAP touchscreen	PCAP touchscreen
<b>System</b>		
Processor	Arm Cortex-A9 (1 GHz to 1.6 GHz)	Qualcomm® Snapdragon™ 660 (Octa-core up to 2.2 GHz)
Memory	1GB LPDDR3	3GB LPDDR3
Storage	16GB eMMC	32GB eMMC
OS	Android 6.0	Android 9.0
<b>Wireless Communications</b>		
WLAN	802.11 a/b/g/n	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 4.0	Bluetooth 5.0
WWAN	Optional 4G (LTE, HSPA+, GSM/GPRS/EDGE, EV-DO Rev A, 1 x RTT), Optional 3G (HSPA+, GSM/GPRS/EDGE)	Optional 4G LTE
GPS	u-Blox Neo-6Q on Docking	u-Blox Neo-8 Series on Docking board
<b>Connectors</b>		
Computer	1 x Micro SIM Card Slot, 1 x Micro SD Card Slot, 1 x USB OTG, 1 x 12V DC power input jack	1 x Dual-Nano SIM Card Slot, 1 x Micro SD Card Slot, 1 x USB 3.0 Type-C, 1 x 12V DC power input jack
Dock	1 x COM 1, 1 x COM 2, 1 x DB9 for USB port (Support 2 x USB2.0), 1 x CAN Bus or 1 x Audio, 1 x 400Mbps LAN port Optional PoE as Power sourcing equipment (PSE) support 802.3at Type-2, 1 x Power Connector SMA Connector for external antenna (WiFi, Optional GPS, Optional WWAN)	1 x COM 1, 1 x COM 2, 1 x DB9 for USB port (Support 2 x USB2.0), 1 x CAN Bus or 1 x Audio, 1 x Gigabit LAN port, 1 x Power Connector SMA Connector for external antenna (WiFi, Optional WWAN)
<b>Mechanical</b>		
Dimensions	Computer: 268 x 214 x 35 mm Docking: 202 x 245 x 52 mm	Computer: 268 x 214 x 35 mm Docking: 202 x 245 x 52 mm
Net Weight	Computer 1.7kg and Docking 1.6kg	Computer 1.7kg and Docking 1.6kg
<b>Environment</b>		
Operating Temp.	AC Mode: -30°C to 50°C (-22°F to 122°F) Battery Mode: 0°C to 50°C (32°F to 122°F)	AC Mode: -30°C to 50°C (-22°F to 122°F) Battery Mode: -10°C to 50°C (-14°F to 122°F)
Humidity	5% to 90% (Non-condensing, RH)	5% to 90% (Non-condensing, RH)
IP Rating	IP65	IP65
Impact	Support EN62262 IK07 rating	Support EN62262 IK07 rating
Shock	Compliant with MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.6 Procedure I
Vibration	Compliant with MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.6 Procedure I
<b>Power</b>		
Power Input	10~60V with isolation power and ignition control	10~60V with isolation power and ignition control
Battery	11.1V typ. 2600mAh Li-Polymer Battery (3S1P)	7.6V, Battery (2S1P)
<b>Data Capture</b>		
Camera	Front: 2MP camera	Front: 2MP camera
<b>Certifications</b>		
Safety	CE, FCC, UL60950-1, EN60950-1	CE, FCC,

7"

8"

8.4"

10.4"

12.1"

15"

19"

72

# x86 G-WIN GS Series Panel PC

## G-WIN GS Series

### Custom configuration



Wide Power



### Application



#### Wood Harvester

"FOR DEMANDING LOGGING CONDITIONS."

Winmate 10.4" GS Series Panel PC was installed inside a wood harvester. G-WIN panel PC designed for demanding conditions survives both water drops and temperature changes.

**"TOUGH. RUGGED.  
HEAVY DUTY."**

- 10.1"~15" PCAP touchscreen
- Intel® Celeron® N2930
- Windows 10/8/7

---

M12 waterproof connectors

---

Tested MIL-STD 810-G, MIL-STD 461-F

---

Mounting solution for vehicle applications

---

Power ignition control

---

Full IP65 waterproof and dust proof

---

Wide operating temperature

---

### Accessories

---

RS232 Cable

VGA Cable

USB Cable

Power Cable

Driver CD

# x86 G-WIN GS Series Panel PC

Intel® Celeron® N2930



Model Name	10.1" (16:9)	10.4"	12.1"	15"
	W10IB3S-GSH1	R10IB3S-GST2	R12IB3S-GSM2	R15IB3S-GSC3
<b>Display</b>				
<b>Resolution</b>	1024 x 600	1024 x 768	1024 x 768	1024 x 768
<b>Panel Brightness</b>	450 nits (Optional 800 nits)	350 nits (Optional 1000 nits)	500 nits (optional 1000 nits)	250 nits (optional 1000 nits)
<b>Contrast Ratio</b>	800:1 (Typ.)	1000:1 (Typ.)	700:1 (Typ.)	2000:1 (Typ.)
<b>Active Area</b>	222.72 (H) x 125.28 (V)	210.4 (H) x 157.8 (V)	245.16 (H) x 184.32 (V)	304.1 (H) x 228.1 (V)
<b>Viewing Angle</b>	-75~80 (H); -80~80 (V)	-88~88 (H); -88~88 (V)	-80~80 (H); -70~70 (V)	-88~88 (H); -88~88 (V)
<b>Display Color</b>	16.7M	16.2M	16.2M	16.2M
<b>System</b>				
<b>Processor</b>	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)
<b>System Memory</b>	2GB DDR3L 1600 SODIMM (Max. 8GB)	2GB DDR3L 1600 SODIMM (Max. 8GB)	2GB DDR3L 1600 SODIMM (Max. 8GB)	2GB DDR3L 1600 SODIMM (Max. 8GB)
<b>Storage</b>	64GB mSATA SSD max. 512GB	64GB mSATA SSD max. 512GB	64GB mSATA SSD max. 512GB	mSATA SSD 64GB max. 512GB
<b>OS</b>	Windows 10 IoT Enterprise / Windows Embedded 8.1 Industry Pro / Windows Embedded Standard 7 / Windows 7 Pro for Embedded System	Windows 10 IoT Enterprise / Windows Embedded 8.1 Industry Pro / Windows Embedded Standard 7 / Windows 7 Pro for Embedded System	Windows 10 IoT Enterprise / Windows Embedded 8.1 Industry Pro / Windows Embedded Standard 7 / Windows 7 Pro for Embedded System	Windows 10 IoT Enterprise / Windows Embedded 8.1 Industry Pro / Windows Embedded Standard 7 / Windows 7 Pro for Embedded System
<b>Connectors</b>				
<b>USB</b>	1 x USB 2.0 (M12 Type)	1 x USB 2.0 (M12 Type)	1 x USB 2.0 (M12 Type)	1 x USB 2.0 (M12 Type)
<b>Ethernet</b>	1 x 10/100/1000 LAN (M12 Type)	1 x 10/100/1000 LAN (M12 Type)	1 x 10/100/1000 LAN (M12 Type)	1 x 10/100/1000 LAN (M12 Type)
<b>COM</b>	1 x RS232 (M12 Type) (Optional 422/485)	1 x RS232 (M12 Type) (Optional 422/485)	1 x RS232 (M12 Type) (Optional 422/485)	1 x RS232 (M12 Type) (Optional 422/485)
<b>Power</b>	1 x Power Jack (M12 Type)	1 x Power Jack (M12 Type)	1 x Power Jack (M12 Type)	1 x Power Jack (M12 Type)
<b>Audio</b>				
<b>Speaker</b>	1 x 1 Watt Speaker	1 x 1 Watt Speaker	1 x 1 Watt Speaker	1 x 1 Watt Speaker
<b>Mechanical</b>				
<b>Dimensions</b>	263.28 x 172 x 35.7 mm	252.4 x 198 x 43 mm	296.2 x 226.7 x 45.5 mm	363.4 x 277.8 x 45.2 mm
<b>Cooling System</b>	Fanless design	Fanless design	Fanless design	Fanless design
<b>Mounting</b>	VESA Mount (75 x 75 mm), Panel Mount	VESA Mount (75 x 75 mm), Panel Mount	VESA Mount (75 x 75 mm), Panel Mount	VESA Mount (75 x 75 mm), Panel Mount
<b>Operating Temp.</b>	-15°C to 55°C	-15°C to 55°C	-15°C to 55°C	-15°C to 55°C
<b>Humidity</b>	10% to 95% (Non-condensing, RH)	10% to 95% (Non-condensing, RH)	10% to 95% (Non-condensing, RH)	10% to 95% (Non-condensing, RH)
<b>Power</b>				
<b>Power Input</b>	9~36V DC	9~36V DC	9~36V DC	9~36V DC
<b>AC Adapter</b>	AC 110~240 V, Universal, ±10%	AC 110~240 V, Universal, ±10%	AC 110~240 V, Universal, ±10%	AC 110~240 V, Universal, ±10%
<b>Certifications</b>				
<b>Safety</b>	CE, FCC	CE, FCC	CE, FCC	CE, FCC

7"

8"

8.4"

10.4"

12.1"

15"

19"



# Arm G-WIN GS Series Panel PC

## G-WIN GS Series

### Custom configuration



Wide Power



### Application



#### Straw Collector

"INTERACTIVE AND SMART TERMINAL FOR HEAVY-DUTY VEHICLE USE"

Tailored for those who are in demand of excellent in-vehicle computing systems operated in rugged environments that experience shock and vibration.

“ **SATISFY YOUR  
HEAVY-DUTY NEEDS.** ”

- 7"~15" PCAP touchscreen
- Arm Cortex-A9
- Android

---

M12 waterproof connectors

---

Tested MIL-STD-810G, MIL-STD-461F

---

Mounting solution for vehicle applications

---

Power ignition control

---

Full IP65 waterproof and dust proof

---

Wide operating temperature

---

### Accessories

---

RS232 Cable

VGA Cable

USB Cable

Power Cable

Driver CD

# Arm G-WIN GS Series Panel PC

Arm Cortex-A9



Model Name	7" (16:9) W07FA3S-GSO1	10.1" (16:9) W10FA3S-GSH1	10.4" R10FA3S-GST2	12.1" R12FA3S-GSM2	15" R15FA3S-GSC3
<b>Display</b>					
<b>Resolution</b>	1024 x 600	1024 x 600	1024 x 768	1024 x 768	1024 x 768
<b>Panel Brightness</b>	1000 nits	450 nits (Optional 800 nits)	350 nits (Optional 1000 nits)	500 nits (Optional 1000 nits)	250 (Optional 1000 nits)
<b>Contrast Ratio</b>	700:1 (Typ.)	800:1 (Typ.)	1000:1 (Typ.)	700:1 (Typ.)	2000:1 (Typ.)
<b>Active Area</b>	153.6 (W) x 90.0 (H)	222.72(H)x125.28(V)	210.4 (W) x 157.8 (H)	245.16 (W) x 184.32 (H)	304.1(H) x 228.1(V)
<b>Viewing Angle</b>	-75~75 (H); -75~70 (V)	-75~80 (H); -80~80 (V)	-88~88 (H); -88~88 (V)	-80~80 (H); -70~70 (V)	-88~88 (H); -88~88 (V)
<b>Display Color</b>	16.7M	16.7M	16.2M	16.2M	16.2M
<b>System</b>					
<b>Processor</b>	Arm Cortex-A9 (1 GHz to 1.6 GHz)	Arm Cortex-A9 (1 GHz to 1.6 GHz)	Arm Cortex-A9 (1 GHz to 1.6 GHz)	Arm Cortex-A9 (1 GHz to 1.6 GHz)	Arm Cortex-A9 (1 GHz to 1.6 GHz)
<b>System Memory</b>	1GB LPDDR3 (Optional 2GB)	1GB LPDDR3 (Optional 2GB)	1GB LPDDR3 (Optional 2GB)	1GB LPDDR3 (Optional 2GB)	1GB LPDDR3 (Optional 2GB)
<b>Storage</b>	Onboard 16GB eMMC (Default)	Onboard 16GB eMMC (Default)	Onboard 16GB eMMC (Default)	Onboard 16GB eMMC (Default)	Onboard 16GB eMMC (Default)
<b>OS</b>	Android 6.0 (Default) Ubuntu 16.04 (Optional)	Android 6.0 (Default) Ubuntu 16.04 (Optional)	Android 6.0 (Default) Ubuntu 16.04 (Optional)	Android 6.0 (Default) Ubuntu 16.04 (Optional)	Android 6.0 (Default) Ubuntu 16.04 (Optional)
<b>Connectors</b>					
<b>USB</b>	1 X USB 2.0 (M12 Type) 1 x USB OTG (On side)	1 x USB 2.0 (M12 Type) 1 x USB OTG (On side)	1 x USB2.0, 1 x USB OTG, 1 x Console (For Linux)	1 x USB 2.0 (M12 Type) 1 x USB OTG (On side)	1 x USB 2.0 (M12 Type) 1 x USB OTG (On Bottom)
<b>Ethernet</b>	1 x 10/100/1000 LAN (M12 type)	1 x 10/100/1000 LAN (M12 Type)	1 x 10/100/1000 Mbps (LAN)	1 x 10/100/1000 LAN (M12 Type)	1 x 10/100/1000 LAN (M12 Type)
<b>COM</b>	1 x RS232 (M12 type) (Optional 422/485)	1 x RS232 (M12 Type) (Optional 422/485)	1 x RS232 (M12 Type) (Optional 422/485)	1 x RS232 (M12 Type) (Optional 422/485)	1 x RS232 (M12 Type) (Optional 422/485)
<b>SD Slot</b>	1 x Micro SD Card Slot	1 x Micro SD Card Slot	1 x Micro SD Card Slot	1 x Micro SD Card Slot	1 x Micro SD Card Slot
<b>Power</b>	1 x Power Jack (M12 Type)	1 x Power Jack (M12 Type)	1 x Power Jack (M12 Type)	1 x Power Jack (M12 Type)	1 x Power Jack (M12 Type)
<b>Audio</b>					
<b>Speaker</b>	1 x 1 Watt Speaker	1 x 1 Watt Speaker	1 x 1 Watt Speaker	1 x 1 Watt Speaker	1 x 1 Watt Speaker
<b>Mechanical</b>					
<b>Dimensions</b>	189.4 x 145.4 x 39.8 mm	263.28 x 171 x 35.7 mm	252.4 x 198 x 43 mm	296.2 x 226.7 x 45.5 mm	363.4 x 277.8 x 45.2 mm
<b>Cooling System</b>	Fanless design	Fanless design	Fanless design	Fanless design	Fanless design
<b>Mounting</b>	VESA Mount (75 x 75 mm), Panel Mount	VESA Mount (75 x 75 mm), Panel Mount	VESA Mount (75 x 75 mm), Panel Mount	VESA Mount (75 x 75 mm), Panel Mount	VESA Mount (100 x 100 mm), Panel Mount
<b>Operating Temp</b>	-15°C to 55°C	-15°C to 55°C	-15°C to 55°C	-15°C to 55°C	-15°C to 55°C
<b>Humidity</b>	10% to 95% (Non- condensing, RH)	10% to 95% (Non- condensing, RH)	10% to 95% (Non- condensing, RH)	10% to 95% (Non- condensing, RH)	10% to 95% (Non- condensing, RH)
<b>Power</b>					
<b>Power Input</b>	9~24V DC	12V DC	12V DC	12V DC	12V DC
<b>AC Adapter</b>	AC 110~240 V, Universal, ±10%	AC 110~240 V, Universal, ±10%	AC 110~240 V, Universal, ±10%	AC 110~240 V, Universal, ±10%	AC 110~240 V, Universal, ±10%
<b>Certifications</b>					
<b>Safety</b>	CE, FCC	CE, FCC	CE, FCC	CE, FCC	CE, FCC

7"

8"

8.4"

10.4"

12.1"

15"

19"

# 8.4" x86 Vehicle Mounted Computer

## G-WIN VM Series

### Custom configuration



Wide Power



**“ TOUGH. RUGGED.  
HEAVY DUTY. ”**

### Application



#### Firefighter Truck

“DURABLE IN-VEHICLE  
COMPUTER.”

Winmate 15-inch panel  
PC was installed inside a  
firefighter truck for navigation  
purposes.

- 8.4" with resistive touchscreen
- Intel® Celeron® N2930
- Windows 10/8/7

---

Aluminum housing with anti-corrosion treatments

---

IP65 waterproof and dustproof

---

Tested MIL-STD 810-G, MIL-STD 461-F

---

Compliance with EN50155

---

Operating temperature -10°C to 55°C

---

### Accessories

---

RS232 Cable

VGA Cable

USB Cable

Power Cable

Driver CD

## 8.4" x86 Vehicle Mounted Computer

Intel® Celeron® N2930



Model Name	8.4"
	R08IB3S-VMU1
<b>Display</b>	
Resolution	800 x 600
Panel Brightness	600 nits
Contrast Ratio	600:1 (Typ.)
Active Area	170.4 (H) x 127.8 (V)
Viewing Angle	-75~75 (H); -60~70 (V)
Display Color	262,144 (6 bits/color)
<b>System</b>	
Processor	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)
BIOS	AMI BIOS
Memory	1 x DDR3L 1600 MHz SO-DIMM Max. 8GB
Ethernet	Intel® I210-AT GbE LAN
Storage	mSATA SSD default 64G (Max. 512GB)
Expansion Slot	1 x Mini PCIe slot (For wireless module), 1 x Mini PCIe slot (For SATA SSD)
OS	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7 Windows 7 Pro for Embedded System
<b>Connectors</b>	
Serial Interface	1 x RS232/422/485 (Default RS232), 1 x RS232
USB	1 x USB 3.0, 1 x USB 2.0
LAN	2 x RJ45 10/100/1000
Power	1 x DC-in Jack (Phoenix type)
HDMI	1 x HDMI
Antenna	1 x WLAN antenna SMA on top (Optional)
<b>Power</b>	
Power Input	9~36V DC with isolation (Phoenix type) Optional 6~60V DC, with Ignition On/Off delay
AC Adapter	AC 110~240 V, Universal, ±10%
<b>Certifications</b>	
Safety	CE, FCC

7"

8"

8.4"

10.4"

12.1"

15"

19"



## Custom configuration



Wide Power

## Application



### Cargo Forklift

"KEEP WAREHOUSE  
ECOSYSTEM RUNNING  
SMOOTHLY"

Go for the right technology  
that helps minimize errors,  
streamline ordering and  
inventory management,  
and improve operational  
efficiencies.

# 10.4" x86 Vehicle Mounted Computer G-WIN VM Series



**“ TOUGH. RUGGED.  
HEAVY DUTY. ”**

- 10.4" with resistive touchscreen
- Intel® Core™ i5-7200U
- Intel® Celeron® N2930
- Windows 10/8/7

---

Aluminum housing with anti-corrosion treatments

---

IP65 waterproof and dustproof

---

Tested MIL-STD 810-G, MIL-STD 461-F

---

Compliance with EN50155

---

Operating temperature -10°C to 55°C

---

## Accessories

RS232 Cable

VGA Cable

USB Cable

Power Cable

Driver CD

# 10.4" x86 Vehicle Mounted Computer

Intel® Core™ i5-7200U

Intel® Celeron® N2930



Model Name	10.4	10.4	10.4	10.4
	R10IK3S-VMT2	R10IB3S-VMP1	R10IB3S-VMP3	R10IB3S-VMT2
<b>Display</b>				
<b>Resolution</b>	1024 x 768	800 x 600	640 x 480	1024 x 768
<b>Panel Brightness</b>	350 nits	600 nits	450 nits	350 nits
<b>Contrast Ratio</b>	1000:1 (Typ.)	400:1 (Typ.)	700:1 (Typ.)	1000:1 (Typ.)
<b>Active Area</b>	201.4 (H) x 157.8 (V)	211.2 (H) x 158.4 (V)	211.2 (H) x 158.4 (V)	201.4 (H) x 157.8 (V)
<b>Viewing Angle</b>	-88~88 (H); -88~88 (V)	-70~70 (H); -70~60 (V)	-80~80 (H); -80~60 (V)	-88~88 (H); -88~88 (V)
<b>Display Color</b>	16.2M (6 bits+FRC)	16.2M (8 bits/color)	16.2M (8 bits/color)	16.2M (6 bits+FRC)
<b>System</b>				
<b>Processor</b>	Intel® Core™ i5-7200U (3M Cache, up to 3.10 GHz)	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)
<b>BIOS</b>	Insyde BIOS	AMI BIOS	AMI BIOS	AMI BIOS
<b>Memory</b>	1 x DDR4 2133 MHz SO-DIMM (Default 4GB, Max. 16GB)	1 x DDR3L 1600 MHz SO-DIMM Max. 8GB	1 x DDR3L 1600 MHz SO-DIMM Max. 8GB	1 x DDR3L 1600 MHz SO-DIMM Max. 8GB
<b>Ethernet</b>	Intel® I211-AT GbE	Intel® I210-AT GbE LAN	Intel® I210-AT GbE LAN	Intel® I210-AT GbE LAN
<b>Storage</b>	M.2 SSD (Default 64GB, Max. 512GB)	mSATA SSD default 64GB Max. 512GB	mSATA SSD default 64GB Max. 512GB	mSATA SSD default 64GB Max. 512GB
<b>Expansion Slot</b>	M.2 E Key for WLAN	1 x Mini PCIe slot (For wireless module) 1 x Mini PCIe slot (For SATA SSD)	1 x Mini PCIe slot (For wireless module) 1 x Mini PCIe slot (For SATA SSD)	1 x Mini PCIe slot (For wireless module) 1 x Mini PCIe slot (For SATA SSD)
<b>OS</b>	Windows 10 IoT Enterprise	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7 Windows 7 Pro for Embedded System	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7 Windows 7 Pro for Embedded System	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7 Windows 7 Pro for Embedded System
<b>Connectors</b>				
<b>Serial Interface</b>	1 x RS232/422/485 (Default RS232), 1 x RS232	1 x RS232/422/485 (Default RS232), 1 x RS232	1 x RS232/422/485 (Default RS232), 1 x RS232	1 x RS232/422/485 (Default RS232), 1 x RS232
<b>USB</b>	2 x USB 3.0	1 x USB 3.0, 1 x USB 2.0	1 x USB 3.0, 1 x USB 2.0	1 x USB 3.0, 1 x USB 2.0
<b>LAN</b>	2 x RJ45 10/100/1000	2 x RJ45 10/100/1000	2 x RJ45 10/100/1000	2 x RJ45 10/100/1000
<b>Power</b>	1 x DC Jack (Phoenix type)	1 x DC Jack (Phoenix type)	1 x DC Jack (Phoenix type)	1 x DC Jack (Phoenix type)
<b>HDMI</b>	1 x HDMI	1 x HDMI	1 x HDMI	1 x HDMI
<b>Antenna</b>	WLAN antenna SMA in top (Optional)	1 x WLAN antenna SMA on top (Optional)	1 x WLAN antenna SMA on top (Optional)	1 x WLAN antenna SMA on top (Optional)
<b>Power</b>				
<b>Power Input</b>	9~36V DC with Isolation (Phoenix type) Optional 6~60V DC, with Ignition On/Off delay	9~36V DC with Isolation (Phoenix type) Optional 6~60V DC, with Ignition On/Off delay	9~36V DC with Isolation (Phoenix type) Optional 6~60V DC, with Ignition On/Off delay	9~36V DC with Isolation (Phoenix type) Optional 6~60V DC, with Ignition On/Off delay
<b>AC Adapter</b>	AC +110~240 V, Universal, ±10%	AC +110~240 V, Universal, ±10%	AC +110~240 V, Universal, ±10%	AC +110~240 V, Universal, ±10%
<b>Certifications</b>				
<b>Safety</b>	CE, FCC	CE, FCC	CE, FCC	CE, FCC

7"

8"

8.4"

10.4"

12.1"

15"

19"

# 12.1" x86 Vehicle Mounted Computer

## G-WIN VM Series

### Custom configuration



Wide Power



**“ TOUGH. RUGGED.  
HEAVY DUTY. ”**

### Application



#### Tractor

**“COMPACT, YET  
RUGGED.”**

Minimizes obstructions to road visibility in a compact form factor that does not block the drivers' view.

- 12.1" with resistive touchscreen
- Intel® Celeron® N2930
- Windows 10/8/7

---

Aluminum housing with anti-corrosion treatments

---

IP65 waterproof and dustproof

---

Tested MIL-STD 810-G, MIL-STD 461-F

---

Compliance with EN50155

---

Operating temperature -10°C to 55°C

---

### Accessories

---

RS232 Cable

VGA Cable

USB Cable

Power Cable

Driver CD

# 12.1" x86 Vehicle Mounted Computer

Intel® Celeron® N2930



Model Name	12.1" (16:10)
	W12IB3S-VMM9
<b>Display</b>	
Resolution	1280 x 800
Panel Brightness	400 nits
Contrast Ratio	1000:1 (Typ.)
Active Area	261.12 (H) x 163.2 (V)
Viewing Angle	-88~88 (H); -88~88 (V)
Display Color	262.144 (6 bits/color)
<b>System</b>	
Processor	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)
BIOS	AMI 16 Mbit Flash BIOS
Memory	1 x DDR3L 1600 MHz SO-DIMM Max. 8GB
Storage	mSATA SSD default 64GB (Max. 512GB)
OS	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7 Windows 7 Pro for Embedded System
<b>Connectors</b>	
Serial Interface	1 x RS232, 1 x RS232/422/485 (Default RS232)
USB	1 x USB 3.0, 1 x USB 2.0
LAN	2 x RJ45 10/100/1000
Power	1 x Terminal Block
HDMI	1 x HDMI
CAN Bus	1 x LAN Bus (Optional)
Digital I/O	1 x Digital I/O (Optional)
Antenna	1 x WLAN or WWAN Antenna in top (Optional)
<b>Power</b>	
Power Input	9~36V DC with Isolation (Phoenix type) Optional 6~60V DC, with Ignition On/Off delay
AC Adapter	AC 110~240 V, Universal, ±10%
<b>Certifications</b>	
Safety	CE, FCC

7"

8"

8.4"

10.4"

12.1"

15"

19"



# 15" x86 Vehicle Mounted Computer

## G-WIN VM Series

### Custom configuration



Wide Power



**“ TOUGH. RUGGED.  
HEAVY DUTY. ”**

### Application



#### Log Loader

**“RUGGED, HIGH-PERFORMANCE VEHICLE-MOUNTED TERMINAL.”**

The device is installed inside a log loader to boost productivity and help forest equipment operators work more efficiently.

- 15" with resistive touchscreen
- Intel® Core™ i5-7200U
- Intel® Celeron® N2930
- Windows 10/8/7

---

Aluminum housing with anti-corrosion treatments

---

IP65 waterproof and dustproof

---

Tested MIL-STD 810-G, MIL-STD 461-F

---

Compliance with EN50155

---

Operating temperature -10°C to 55°C

---

### Accessories

RS232 Cable

VGA Cable

USB Cable

Power Cable

Driver CD

# 15" x86 Vehicle Mounted Computer

Intel® Core™ i5-7200U

Intel® Celeron® N2930



Model Name	15"	15"
	R15IK3S-VMC3(HB)	R15IB3S-VMC3(HB)
<b>Display</b>		
<b>Resolution</b>	1024 x 768	1024 x 768
<b>Panel Brightness</b>	300 nits (Optional for 1000 nits)	300 nits (Optional for HB 1000 nits)
<b>Contrast Ratio</b>	2000:1 (Typ.)	2000:1 (Typ.)
<b>Active Area</b>	304.128 (H) x 228.096 (V)	304.1 (H) x 228.1 (V)
<b>Viewing Angle</b>	-88~88 (H); -88~88 (V)	-88~88 (H); -88~88 (V)
<b>Display Color</b>	16.2M, 8 bits	16.2M, 8 bits
<b>System</b>		
<b>Processor</b>	Intel® Core™ i5-7200U (3M Cache, up to 3.10 GHz)	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)
<b>BIOS</b>	Insyde BIOS	AMI BIOS
<b>Memory</b>	1 x DDR4 2133 MHz SO-DIMM (Default 4GB, Max. 16GB)	1 x DDR3L 1600 MHz SO-DIMM Max. 8GB
<b>Storage</b>	M.2 SSD default 64GB (Max.512GB)	mSATA SSD default 64GB (Max. 512GB)
<b>OS</b>	Windows 10 IoT Enterprise	Windows 10 IoT Enterprise Windows Embedded 8.1 Industry Pro Windows Embedded Standard 7 Windows 7 Pro for Embedded System
<b>Connectors</b>		
<b>Serial Interface</b>	1 x RS232, 1 x RS232 (Optional) 1 x RS232/422/485 (Default RS232)	1 x RS232, 1 x RS232 (Optional), 1 x RS232/422/485 (Default RS232)
<b>USB</b>	2 x USB 3.0	1 x USB 3.0, 1 x USB 2.0
<b>LAN</b>	2 x RJ45 10/100/1000	2 x RJ45 10/100/1000
<b>Power</b>	1 x Terminal Block	1 x Terminal Block
<b>HDMI</b>	1 x HDMI	1 x HDMI
<b>CAN Bus</b>	1 x CAN Bus (Optional)	1 x CAN Bus (Optional)
<b>Digital I/O</b>	1 x Digital I/O (Optional)	1 x Digital I/O (Optional)
<b>Power</b>		
<b>Power Input</b>	9~36V DC (Phoenix type) with Isolation Optional 6~60V DC, with Ignition On/Off delay	9~36V DC (Phoenix type) with Isolation Optional 6~60V DC, with Ignition On/Off delay
<b>AC Adapter</b>	AC 110~240 V, Universal, ±10%	AC 110~240 V, Universal, ±10%
<b>Certifications</b>		
<b>Safety</b>	CE, FCC	CE, FCC

7"

8"

8.4"

10.4"

12.1"

15"

19"







# MARKET READY SOLUTIONS

## Rugged Products for Vertical Market

Overview . . . . . 87

### ATEX

Overview . . . . . 89

4.3" Arm ATEX Rugged Mobile Computer . . . . . 91

7" Arm ATEX Rugged Tablet PC . . . . . 93

10.1" x86 ATEX Rugged Tablet PC . . . . . 95

10.1" Arm ATEX Rugged Tablet PC . . . . . 97

### Healthcare

Overview . . . . . 99

10.1" x86 Healthcare Rugged Tablet PC . . . . . 101

Arm Healthcare Rugged Mobile Computer . . . 103



# Rugged Products for Vertical Market

## Overview

For enterprises operating in rugged or potentially hazardous environments, access to the latest technology built specifically for these demanding industries is imperative. Winmate understands the need for ruggedness and uninterrupted productivity when it comes to operating in challenging environments.

At Winmate, we have the engineering expertise and strategic partnerships with technology companies to provide customers the leading edge in industrial-grade communications tools that maximize operational efficiency, safety, asset tracking and data management.

Our engineering process and in-depth knowledge of electrical, mechanical, thermal, and firmware design ensures optimized performance, durability and reliability with every rugged product we create. At Winmate, our technologies undergo a battery of tests at our in-house, state-of-the-art testing facility to verify the performance.

### Winmate's products for vertical markets include:

- Compliance to international standards
- The latest Android™, Windows® operating system
- The most innovative product know-how

Wimate provides rugged computing solutions for demanding industries, including ATEX, Healthcare, Marine and Military.



## Technology

### Testing & Certifications

To meet the safety qualification, Winmate offers ATEX and Class 1 Division 2 (C1D2) certified solutions for maintaining safe operations and collecting detailed, sensitive data in remote rig and pipeline locations.

For the classification of the equipment, Winmate generally uses both the North American National Electric Code (NEC) and the European ATEX directive.



#### ATEX

Certified for harsh environments

- Intrinsic safety schematics design
- Non-spark safety design
- No-air potting process
- UL and CSA certified factory with Quality Management System (QMS)



#### Healthcare

- Right technology to improve patient care
- Super-high ESD protection
- Excellent RS immunity
- Super-low current leakage
- Low surface temperature

## Product Guide - Products for Vertical Market

Our product guide helps you to navigate and find the right product from our excessive product line.

ATEX				Healthcare	Arm Healthcare Rugged Mobile Computer
					
<b>E430RM4L-EX</b>	<b>M700DM8-EX</b>	<b>M101S-EX</b>	<b>M101Z</b>	<b>M101P-ME</b>	<b>Healthcare Series</b>
<b>p.91</b>	<b>p.93</b>	<b>p.95</b>	<b>p.97</b>	<b>p.101</b>	<b>p.103</b>

## Overview

Oil rigs and remote pipeline locations are some of the most dangerous and challenging work environments anywhere. When looking for electronics to support these environments, devices must stand up to three key requirements:

1. Provide advanced system monitoring even in the most challenging conditions.
2. Accurately identify and track assets and communicate data from remote sites.
3. Withstand the highest scrutiny of certification and inspection.

Winmate rugged computers are designed for the harsh environments of an oil refinery or a drilling rig and come with ATEX Zone 2 and Class 1 Division 2 (C1D2) certifications. By employing automated processes, oil and gas companies can increase the number of production wells, improve production control and reap the benefits of modern technologies.




## Technology

### Testing & Certifications

To meet the safety qualification, Winmate offers ATEX and Class 1 Division 2 (C1D2) certified solutions for maintaining safe operations and collecting detailed, sensitive data in remote rig and pipeline locations.

For the classification of the equipment, Winmate generally uses both the North American National Electric Code (NEC) and the European ATEX directive.

### NEC and IEC Certifications

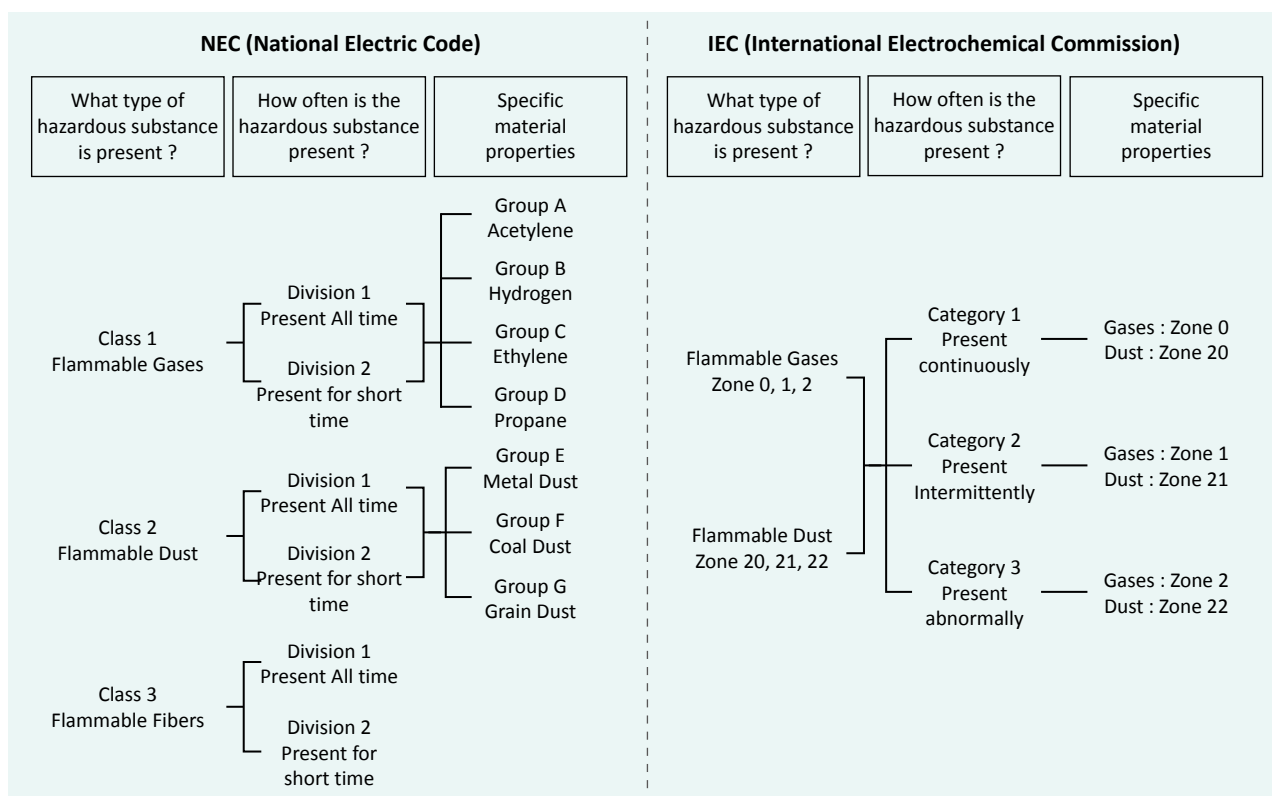



# 4.3" Arm ATEX Rugged Mobile Computer E430 Series

## Custom configuration



Barcode  
Reader



HF RFID  
Reader



Additional  
Storage



## Application



### Exploration & Production Company

"MADE FOR  
HAZARDOUS-AREA  
APPLICATIONS, WITH  
ALL YOUR NEEDS  
CONSIDERED."

The device improves ease of use to mobile workers in industries with hazardous areas to help maximum performance and uncompromising safety.

**“ RUGGED & COMPACT.  
IDEAL FOR FIELD WORK. ”**

- 4.3" 800 x 480 PCAP touchscreen
- Arm Cortex-A53
- Android 7.0

---

2MP webcam front camera

---

8MP rear camera

---

WWAN, Wi-Fi, Bluetooth, GPS

---

260g lightweight portability

---

USB OTG

---

3.7V 3900mAh Li-Poly removable battery

---

IP65 waterproof and dustproof

---

MIL-STD-810G shock, vibration and drop resistance

---

ATEX Zone 2 and C1D2

---

Operating temperature -10°C to 50°C

---

## Accessories

### Standard

Universal USB Adapter

Micro USB Cable

Micro SD Card 16GB

Hand Strap

### Optional

Charging Dock

Battery Charging Dock

Vehicle Charging Dock

Battery

Lanyard

Micro USB Host Cable (OTG Cable)

UHF RFID Reader

## 4.3" Arm ATEX Rugged Mobile Computer

Arm Cortex-A53



ATEX Zone 2 and C1D2

Model Name	4.3" E430RM4L-EX
<b>Display</b>	
Resolution	800 x 480
Panel Brightness	400 nits
Contrast Ratio	800:1 (Typ.)
Touch	PCAP touchscreen
<b>System</b>	
Processor	Arm Cortex-A53 (Quad-core 1.3 GHz)
Memory	2GB SDRAM
Storage	16GB eMMC (Up to 32GB), Micro SD Card (Up to 32GB)
OS	Android 7.0
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n
Bluetooth	Bluetooth 4.0
WWAN	Optional 4G LTE
GPS	Built-in GPS
<b>Connectors</b>	
Connectors	Micro SIM Card Slot, Micro SD Card Slot, USB OTG, Pogo Pin
<b>Audio</b>	
Audio	Mic, Earphone, 1.2W Speaker
<b>User Controls</b>	
Buttons	Volume - +, Power, Function Home, Menu, ESC, Search
LED Indicators	1 x LED Indicator
Sensors	Light, Proximity, G-sensor, Digital Compass
<b>Mechanical</b>	
Dimensions	132.57 x 81.87 x 27.4 mm
Net Weight	260g
<b>Environment</b>	
Operating Temp.	-10°C to 50°C
Humidity	10% to 95% (Non-condensing, RH)
IP Rating	IP65
Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 516.6, 4 ft, Free to concrete
<b>Power Considerations</b>	
Adapter	5V/1A, USB
Battery	3.7V 3900mAh Li-Poly
Battery Operating Time	20 Hr
<b>Data Capture</b>	
Camera	Rear: 8MP camera, Front: 2MP camera
Barcode	Motorola SE4500 (Optional)
RFID	HF RFID Reader (Optional)
NFC	Read / Write, Peer to Peer
<b>Certifications</b>	
Safety	CE, FCC, CCC

# 7" Arm ATEX Rugged Tablet M700 Series

## Custom configuration



Barcode  
Reader



Battery  
Hotswap



“ **COMPACT.  
VIBRATION RESISTANT.** ”

## Application



### Production of Pharmaceutical Products

“SMART MOBILITY  
FOR HAZARDOUS  
LOCATIONS.”

Enables greater efficiency,  
worker safety, group  
communications and  
collaboration across some of  
the worlds most harsh and  
hazardous locations.

- 7" 1280 x 720 PCAP touchscreen
- Arm Cortex-A53
- Android 7.0

---

2MP webcam, 8MP rear camera

---

2GB RAM, 16GB eMMC

---

Wi-Fi, Bluetooth, GPS, GLONASS

---

Up to 20 hours battery operating time

---

IP65 waterproof and dustproof

---

MIL-STD-810G shock, vibration and drop resistant

---

ATEX Zone 2 and C1D2

---

Operating temperature -10°C to 50°C

## Accessories

### Standard

---

Universal Adapter	Battery
-------------------	---------

### Optional

---

Battery Charging Dock	Vehicle Dock	Desk Dock	Handstrap	Carry Bag
Micro SD Card	Capacitive Touch Stylus	Mobile Printer	Vehicle Adapter	

# 7" Arm ATEX Rugged Tablet

Arm Cortex-A53



ATEX Zone 2 and C1D2

Model Name	7" (16:9)
	M700DM8-EX
<b>Display</b>	
Resolution	1280 x 720
Panel Brightness	650 nits
Contrast Ratio	500:1 (Typ.)
Sensors	G-sensor, light sensor
Touch	PCAP touchscreen
<b>System</b>	
Processor	Arm Cortex-A53 (Octa-core 1.3 GHz)
Memory	2GB DDR3 SDRAM
Storage	16GB eMMC
OS	Android 7.0
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n
Bluetooth	Bluetooth 4.0, Support BLE mode + wide-band speech
WWAN	Optional 4G LTE
GNSS	GPS / AGPS / GLONASS
<b>Connectors</b>	
Connectors	1 x USB OTG, 1 x 2.5Ø 5V DC Power Input, 1 x Micro SIM Card Slot, 1 x Micro SD Card Slot
<b>Audio</b>	
Audio	1 x 1.2W Speaker, 2 x Microphone, 1 x Headset jack (Mic+Earphone)
<b>User Controls</b>	
Buttons	1 x Power Button, 2 x Volume Key, 1 x Home, 1 x Menu, 1 x Return, 1 x Search
LED indicator	Power, Battery
<b>Mechanical</b>	
Dimensions	212.4 x 132.8 x 19 mm
Net Weight	550g
<b>Environment</b>	
Operating Temp.	-10°C to 50°C
Humidity	5% to 95% (Non-condensing, RH)
IP Rating	IP65
Shock	MIL-STD-810G M516.6
Vibration	MIL-STD-810G M514.6
Drop	MIL-STD-810G M516.6 5 ft, Free to concrete
<b>Power</b>	
Power Input	5V DC
Battery	3.7V 5300mAh Li-Poly
Adapter	100-240V/ 5V 3A Adapter
<b>Data Capture</b>	
Camera	Front: 2MP Camera, Rear: 8MP Camera with LED auxiliary light with autofocus
Barcode	Motorola SE4500 1D/2D Barcode Reader (Optional)
NFC	NFC (Read/Write, Peer to Peer mode)
<b>Certifications</b>	
Safety	CE, FCC, CCC



# 10.1" x86 ATEX Rugged Tablet

## M101S-EX Series

### Custom configuration



4G LTE



AR & AG  
Screen



Micro SD  
Card Slot



Barcode  
Reader



HF RFID  
Reader



Micro HDMI  
Port



High Capacity  
Battery 16hr



### Application



#### Oil Refinery Plant

"DESIGNED FROM THE INSIDE OUT TO BE DURABLE FOR USE IN EXPLOSIVE ATMOSPHERE."

A highly mobile rugged tablet is necessary, that won't break down during mission-critical tasks where hardware failures could lead to large costs or endanger workers and assets.

**“ ROBUST TABLET TO WITHSTAND INDUSTRIAL USE. ”**

- 10.1" 1920 x 1200 PCAP touchscreen
- Intel® Core™ i5-7200U
- Windows 10 IoT Enterprise

2MP webcam front camera

8MP rear camera with autofocus with LED flash

Glove/ Rain/ Stylus mode, support active pen

Wi-Fi, Bluetooth 5.0, GPS, GLONASS

USB 3.0 Type-A, USB 3.0 Type-C

IP65 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistance

ATEX Zone 2 and C1D2

Operating temperature -10°C to 50°C

Sunlight readable with anti-glare solution

### Accessories

#### Standard

Adapter and Power Cord    Capacitive Stylus    Standard Battery

#### Optional

Smart Card Reader (M101P)	Vehicle Dock (Without VGA output)	Vehicle Cradle	Battery Charger	Desk Dock
High Capacity Battery	Hand Strap	UHF RFID Reader	VESA Mount Kit	Shoulder Strap
Carry Bag	Micro HDMI Cable	Vehicle Charger		

# 10.1" x86 ATEX Rugged Tablet

Intel® Core™ i5-7200U



## ATEX Zone 2 and C1D2

Model Name	10.1" M101S-EX
<b>Display</b>	
Resolution	1920 x 1200
Panel Brightness	800 nits
Contrast Ratio	800:1 (Typ.)
Viewing angle	-85~85 (H) ; -85~85 (V)
Touch	PCAP touchscreen
<b>System</b>	
Processor	Intel® Core™ i5-7200U (3M Cache, up to 3.10 GHz)
Memory	4GB DDR4 SDRAM (Up to 16GB)
Storage	128GB SSD (Up to 512GB)
OS	Windows 10 IoT Enterprise
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n/ac WiFi
Bluetooth	Bluetooth 5.0
WWAN	Optional 4G LTE
GNSS	GPS, GLONASS
<b>Connectors</b>	
Connectors	1 x Micro HDMI, 1 x USB 3.0 (Type-A), 1 x USB 3.0 (Type-C), 1 x Audio Combo Conn. (Mic in or Line Out), 1 x Power Jack, 1 x Micro SD Card Slot, 1 x Micro SIM Card Slot, 1 x Mini PCIe for WWAN Module,
<b>Audio</b>	
Audio	2 x Built-in Digital Mic with Noise Cancellation, 2 x 1W Speaker
<b>User Controls</b>	
Buttons	1 x Power, 1 x Menu/Home, 2 x Programmable Function Keys, 2 x Volume or Panel Brightness
LED Indicator	Power, Battery, HDD, RF
<b>Mechanical</b>	
Dimensions	271.8 x 197.2 x 21 mm
Net Weight	1.25 kg (2.75 lbs)
<b>Environment</b>	
Operating Temp.	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)
Humidity	10% to 90% (Non-condensing, RH)
IP Rating	IP65
Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 516.6, 4 ft to concrete
<b>Power</b>	
Power Input	12~19V DC
Battery	7.4V, typ. 5140mAh Li-Polymer Battery (2S1P) 7.4V, typ. 10280mAh Li-Polymer Battery (2S2P, Optional)
AC Adapter	100~240V, 50-60Hz/19V DC
<b>Data Capture</b>	
Camera	Front: 2MP, Rear: 8MP with LED flash
Integrated	Optional 1D/2D Barcode Reader Optional HF RFID Reader
Add-on Module	-
<b>Certifications</b>	
Safety	CE, FCC

# 10.1" Arm ATEX Rugged Tablet

## M101Z Series

### Custom configuration




AR & AG  
Screen



Additional  
Storage



### Application

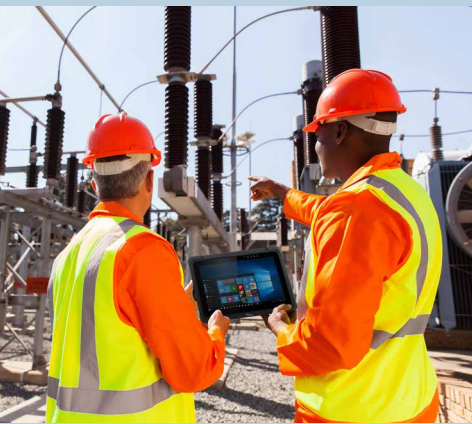

### Maintenance and Repair Service

"DO MORE IN THE FIELD."

A combination of ruggedness, mobile computing, and communication capabilities that empowers your mobile workforce with the right solution for getting the field services done efficiently, from resource allocation, operation streamlining, field personnel management, to work status tracking and more!

**"LIGHTWEIGHT MOBILITY FOR USE IN ANY INDUSTRY."**

- 10.1" 1920 x 1200 PCAP touchscreen
- Qualcomm® Snapdragon™ 660
- Android 9.0

8MP front camera

13MP rear camera

Wi-Fi, Bluetooth, GPS, AGPS

IP65 waterproof and dustproof

MIL-STD-810G shock, vibration and drop resistant

ATEX Zone 1 and C1D2

Operating temperature -10°C to 50°C

### Accessories

#### Standard

Adapter and Power Cord    Capacitive Stylus    Standard Battery

#### Optional

Desk Dock	Vehicle Dock	Vehicle Cradle	Battery Charger	Active Pen
Hand Strap	VESA Mount Kit	Carry Bag	Mobile Printer	

# 10.1" Arm ATEX Rugged Tablet

Qualcomm® Snapdragon™ 660



**Q4, 2020**  
**ATEX Zone 1 and C1D2**

Model Name	10.1"
	M101Z
<b>Display</b>	
Resolution	1920 x 1200
Panel Brightness	800
Contrast Ratio	800:1
Viewing angle	85/85/85/85
Touch	PCAP touchscreen
<b>System</b>	
Processor	Qualcomm® Snapdragon™ 660 (Octa-core up to 2.2 GHz)
Memory	3GB
Storage	32GB eMMC
OS	Android 9.0
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n/ac Wi-Fi
Bluetooth	Bluetooth 5.0
WWAN	Support Sierra MC7455
GPS	GPS / AGPS
<b>Connectors</b>	
Connectors	1 x USB Type-C (OTG)
<b>User Controls</b>	
Buttons	1 x Power, 1 x Home, 1 x Back, 1 x Menu, 1 x Volume Up 1 x Volume Down
LED Indicator	Power, Charging Indicator
<b>Environment</b>	
Operating Temp.	-10°C to 50°C
Humidity	10 to 95% (Non-condensing, RH)
IP Rating	IP65
Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 514.6 Procedure I, 4 ft. to concrete
<b>Power</b>	
Battery	8Hrs
Adapter	100~240 AC to DC out Power Adapter
<b>Data Capture</b>	
Camera	Front: 8MP Camera, Rea: 13MP Camera
RFID	NFC Reader
<b>Certifications</b>	
Safety	CE, FCC, ATEX Zone1, C1D1



# Healthcare


## Overview

Technology has long played an imperative role in streamlining hospital operations and improving patient care. In hospital environments, performance, reliable and accurate image reproduction are imperative. From medical images to patient data, the hospital environment is a complex ecosystem that requires advanced technology to keep it running smoothly.

### **Our medical solutions include:**

- Surgical and clinical display
- Medical tablet computer
- Durable design and the latest operating systems

Expand your medical and healthcare business with the Winmate. As a technology solutions leader, Winmate values our partners. As a partner, you are a vital instrument in ensuring the customer needs are understood and that their expectations are exceeded every time. Our commitment to you and our passion for working as a team to create mutual success is the reason we have created a solid partnership program that works.

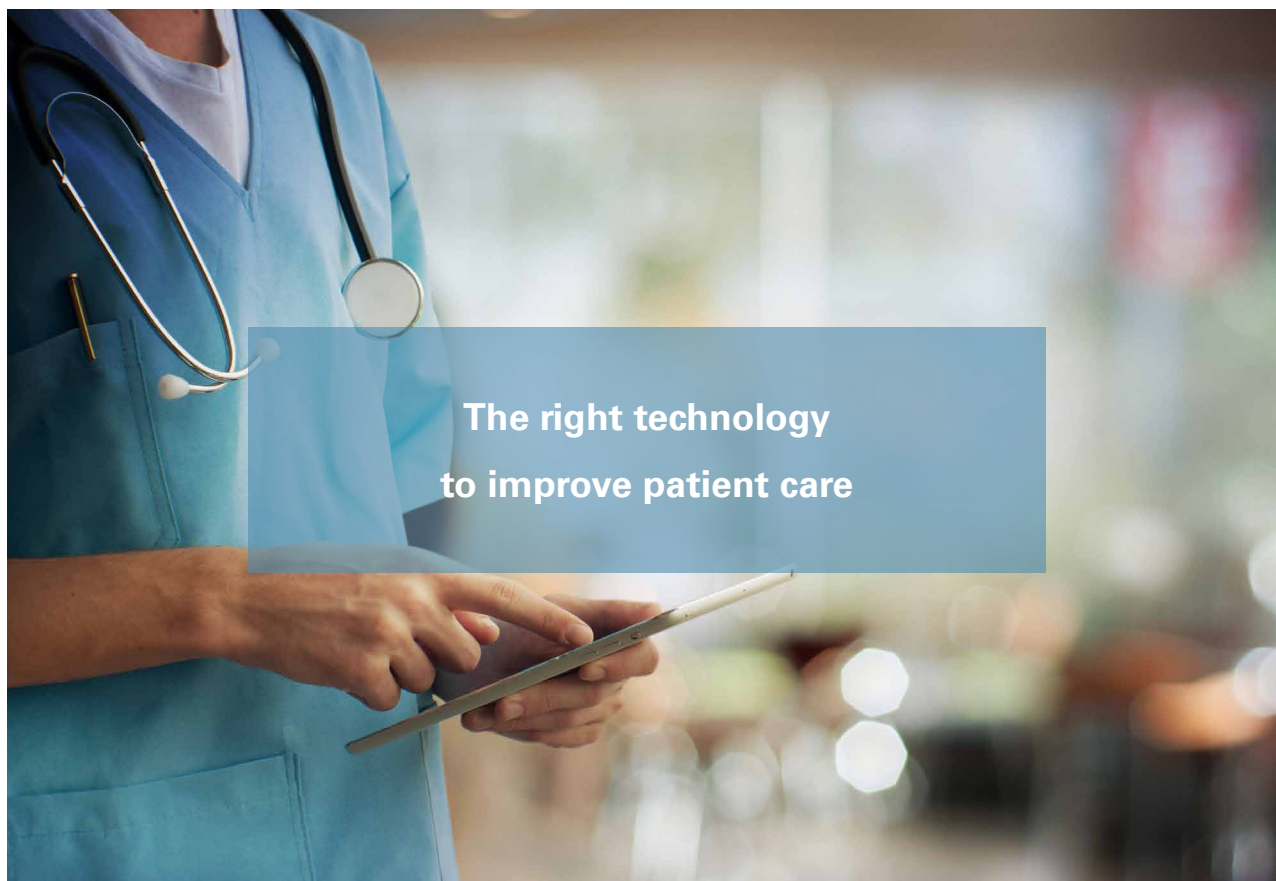

# Healthcare

## Technology

### Certification & Quality Approvals

Winmate developed and implemented a quality management system based on a process management approach which has demonstrate its ability to provide consistent products that meet customer and applicable regulatory requirements, and to address customer satisfaction through the effective application of the system, including continual improvement and the prevention of non-conformity. The quality system complies with the international standard ISO 9001:2008 and the standards which apply to related industries

ISO 9001	ISO 14001	IECQ QC080000	ISO 13485
 <p>Management System ISO 9001:2008 ISO 14001:2004 QC 080000:2012 www.tuv.com ID: 9105917256</p>		 <p>QC 080000 IECQ HSPM</p>	 <p>ISO 13485</p>

Winmate achieved ISO 13485:2016 and EN ISO 13485:2016 certification for its' design, development, production, installation, and servicing of medical devices. What does this mean for you? Winmate's certification confirms any portable panel PCs and mobile tablets we develop for use in the medical industry are safe and meet all regulatory design requirements.

This achievement will also enable Winmate to expand its medical-related product line, and create new opportunities for our original design manufacturer (ODM), original equipment manufacturer (OEM), and rebranding partners.

# 10.1" x86 Healthcare Rugged Tablet PC

## Healthcare Series

### Custom configuration



4G LTE



Barcode Reader



HR RFID Reader



High Capacity Battery 16hr



Additional Memory



Additional Storage



### Application



#### Patient Monitoring

"INSTANTLY ACCESS AND KEEP PATIENT RECORDS."

Winmate 10.1-inch medical tablet was installed in front of hospital bed for monitoring.

**“ DROP RESISTANT. MOBILE. RUGGED. ”**

- 10.1" 1920 x 1200 PCAP touchscreen
- Intel® Pentium® N4200
- Windows 10 IoT Enterprise
- Certified IEC 60601-1, 60601-1-2

---

ISO 13485 certification

---

Wi-Fi, Bluetooth, GPS

---

IP65 waterproof and dustproof

---

High flexibility for customized requests

---

Operating temperature 0 to 35°C

---

### Accessories

AC Adapter

Power Cable

Desk Dock

Vehicle Dock

Carry Bag/Handstrap

# 10.1" x86 Healthcare Rugged Tablet PC

Intel® Pentium® N4200



Model Name	10.1" M101P-ME
<b>Display</b>	
Resolution	1920 x 1200
Panel Brightness	600 nits
Contrast Ratio	800:1 (Typ.)
Touch	PCAP touchscreen
Sensors	Light sensor, G sensor, Gyro, E-compass
<b>System</b>	
Processor	Intel® Pentium® N4200 (2M Cache, up to 2.5 GHz)
Memory	4GB SODIMM LPDDR4 4GB (Up to 8GB)
Storage	64GB solid state drive (M.2 SSD) Optional up to 512GB
OS	Windows 10 IoT Enterprise
<b>Wireless Communications</b>	
WLAN	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 5.0
GNSS	GPS, GLONASS
<b>Connectors</b>	
External I/O	1 x Micro HDMI (Optional), 1 x USB 3.0, 1 x Audio Combo Conn (Mic in/Lin out), 1 x Power Jack, 1 x Micro SD Slot, 1 x USB 3.0 Type-C
Control Buttons	On-screen QWERTY keyboard Button 1 x power, 1 x Home, 2 x volume key, 2 x function key (Programmable function key configured by Hottab Utility)
LED Indicator	Power, Battery, HDD, RF
Audio	1 x Audio Combo connector (Mic in or Line Out)
<b>Mechanical</b>	
Dimensions	271.8 x 197.2 x 19 mm (10.7 x 7.76 x 0.75 inches)
Net Weight	1.2 kg (2.7 lbs) with standard battery, 1.4 kg (3.1 lbs) with optional high capacity battery
Housing	Rugged housing enhanced with antimicrobial properties
Operating Temp.	0°C to 35°C
Humidity	10% to 90% (Non-condensing, RH)
IP Rating	IP65 certified, Dustproof and waterproof
Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 516.6, 4 ft to concrete
<b>Power</b>	
Power Input	12~19V DC
Battery	7.7V, typ. 5900mAh Li-Polymer Battery (2S1P) 7.4V, typ. 10280mAh Li-Polymer Battery (2S2P, optional)
Battery Operating Time	Std. Battery: 8 hours
Adapter	100~240V, 50~60Hz/19V DC
<b>Data Capture</b>	
Camera	8MP with autofocus camera with LED flash at rear 2MP camera at front
RFID	HF RFID reader 13.56 MHz (Optional)
Barcode	1D/2D Barcode Reader (Optional)
<b>Certifications</b>	
Safety	CE, FCC
Medical	IEC 60601-1, IEC 60601-1-2, EN 60601-1, ANSI/AAMI ES 60601-1



# Arm Healthcare Rugged Mobile Computer

## Healthcare Series

### Custom configuration

**4G**

4G LTE

**3G**

3G



Barcode Reader



HR RFID Reader



### Application



#### Patient Monitoring

"INSTANTLY ACCESS AND KEEP PATIENT RECORDS."

Winmate 10.1" medical tablet was installed in front of hospital bed for monitoring.

**“ DROP RESISTANT. MOBILE. RUGGED. ”**

- 5"~7" PCAP touchscreen
- Arm Cortex-A53
- ISO 13485:2016 certified
- Android

---

ISO 13485 certificates

---

Wi-Fi, Bluetooth, GPS, WWAN

---

IP65 waterproof and dustproof

---

MIL-STD-810G Shock and vibration resistance

---

High flexibility for customized requests

---

Operating temperature -10 to 50°C

---

### Accessories

AC Adapter

Power Cable

Desk Dock

Vehicle Dock

Carry Bag/Handstrap

# Arm Healthcare Rugged Mobile Computer

Arm Cortex-A53



Model Name	5"	7"
	E500RM8-ME	M700DM8-ME
<b>Display</b>		
<b>Resolution</b>	1280 x 720	1280 x 720
<b>Panel Brightness</b>	500 nits	650 nits
<b>Contrast Ratio</b>	800:1 (Typ.)	500:1 (Typ.)
<b>Touch</b>	PCAP touchscreen	PCAP touchscreen
<b>Sensors</b>	Light Sensor, Proximity Sensor, G-sensor, Digital Compass	Light Sensor, Proximity Sensor, G-sensor, Digital Compass
<b>System</b>		
<b>Processor</b>	Arm Cortex-A53 (Octa-core 1.3 GHz)	Arm Cortex-A53 (Octa-core 1.3 GHz)
<b>Memory</b>	2GB SDRAM	2GB Mobile DDR2
<b>Storage</b>	16GB eMMC, External Micro SD Card (Up to 32G)	16GB eMMC, External Micro SD Card (Up to 32G)
<b>OS</b>	Android 7.0	Android 7.0
<b>Wireless Communications</b>		
<b>WLAN</b>	802.11 a/b/g/n	802.11 a/b/g/n
<b>Bluetooth</b>	Bluetooth 4.0	Bluetooth 4.0
<b>WWAN</b>	Optional 3G/4G LTE	Optional 3G/4G LTE
<b>GPS</b>	Built-in GPS module	Built-in GPS module
<b>Connectors</b>		
<b>External I/O</b>	2 x Micro SIM Card Slot, 1 x Micro SD Card Slot, 1 x USB OTG, 1 x Power Jack, 1 x Docking Connector	1 x USB OTG, 1 x Headset jack (Mic+Earphone), 1 x 2.5Ø 5V DC Power Input, 1 x Micro SIM Card Slot, 2 x Microphones, 1 x Micro SD Card Slot
<b>User Controls</b>		
<b>Control Buttons</b>	1 x Volume - +, 1 x Power button, 2 x Function button, 4 x Front Key	1 x Power Button, 2 x Volume Key, 1 x Home, 1 x Menu, 1 x Return, 1 x Search
<b>LED Indicator</b>	1 x LED indicator	Power/Battery indicator
<b>Audio</b>	2 x Built-in Mic, 1 x Earphone, 1 x 1.2W Speaker	1 x 1.2W Speaker
<b>Mechanical</b>		
<b>Dimensions</b>	85.9 x 163.2 x 22.5 mm	212.4 x 132.8 x 19 mm
<b>Net Weight</b>	315g	550g
<b>Operating Temp.</b>	-20°C to 60°C (AC Mode) -10°C to 50°C (Battery Mode)	-20°C to 60°C (AC Mode), -10°C to 50°C (Battery Mode)
<b>Humidity</b>	10% to 95% (Non-condensing, RH)	10% to 95% (Non-condensing, RH)
<b>IP Proof</b>	IP65	IP65
<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I	MIL-STD-810G Method 516.5
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	MIL-STD-810G Method 514.5
<b>Drop</b>	MIL-STD-810G Method 516.6, 4 ft, Free to concrete	MIL-STD-810G Method 516.5 4 ft, Free to concrete
<b>Power</b>		
<b>AC Adapter</b>	5V 2A Adapter	100~240V, 50~60Hz, 5VDC
<b>Battery</b>	3.7V 3900mAh Li-ion removable battery	Li-Polymer Battery 5300mAh
<b>Battery Operating Time</b>	20 hrs	20 hrs
<b>Data Capture</b>		
<b>Barcode</b>	Motorola SE4500 1D/2D Barcode Reader	Motorola SE4500 1D/2D Barcode Reader
<b>NFC</b>	NFC (Read/Write, Peer to Peer mode)	NFC (Read/Write, Peer to Peer mode)
<b>Camera</b>	Rear: 8MP Camera with LED auxiliary light with autofocus Front: 2MP Camera	Rear: 8MP Camera with LED auxiliary light with autofocus Front: 2MP Camera
<b>Certifications</b>		
<b>Safety</b>	CE, FCC, CCC	CE, FCC, CCC



HQ

**Winmate Inc.**

9F, No.111-6, Shing-De Rd.,  
San-Chung District,  
New Taipei City 24158, Taiwan

**Tel** +886-2-8511-0288

**E-mail** [sales@winmate.com.tw](mailto:sales@winmate.com.tw)

**Website** [www.winmate.com](http://www.winmate.com)



USA

**Winmate US Inc.**

2640 Mathews Street,  
Smyrna, GA 30080, USA

**Tel** +1-770-274-3381

**E-mail** [NASales@winmate.com.tw](mailto:NASales@winmate.com.tw)

**Website** [www.winmate-rugged.com](http://www.winmate-rugged.com)



CA

**TTX Canada Inc.**

150 Werlich Drive, Units 5&6  
Cambridge, Ontario, N1T 1N6  
Canada

**Tel** +1-519-621-1881

**E-mail** [Sales@ttx.ca](mailto:Sales@ttx.ca)

**Website** [www.ttx.ca](http://www.ttx.ca)



CH

**北京京融电自动化科技有限公司**

Room 204, Building A, Floor 2,  
Building 1-1, No. 1,  
Shangdi Information Road,  
Haidian District, Beijing

**Tel** +86-10-82743702

**E-mail** [sales@winmate.com.cn](mailto:sales@winmate.com.cn)

**Website** [www.winmate.com.cn](http://www.winmate.com.cn)

