
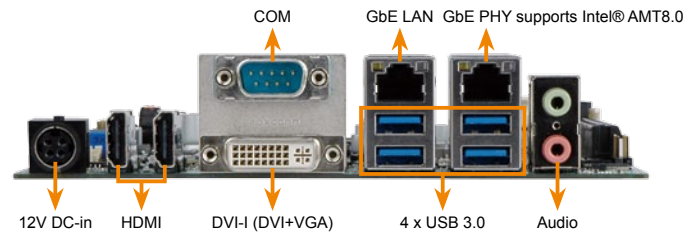
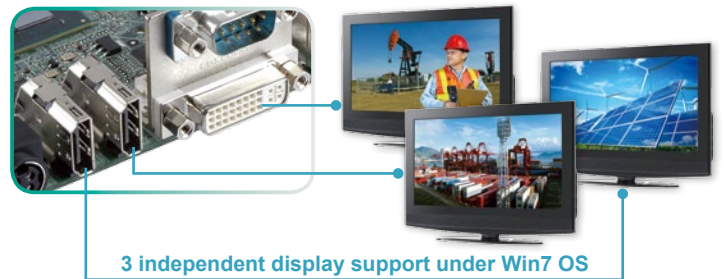


KINO-QM770

Mini-ITX SBC with Socket G2 for Intel® 22nm Mobile CPU, DVI-I/Dual HDMI/LVDS, Dual PCIe GbE, USB 3.0, PCIe Mini, SATA 6Gb/s and Audio

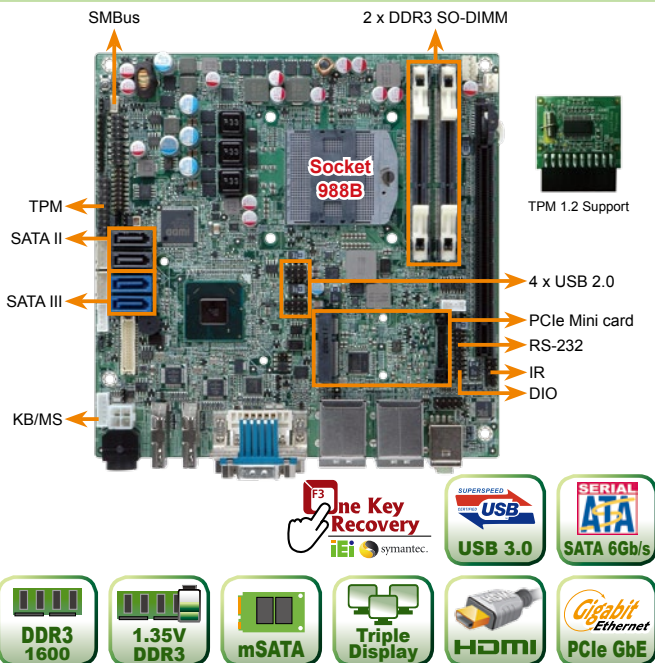


Specifications

- ◆ CPU
 - Socket G2 for Intel® 3rd generation 22nm mobile processor
- ◆ PCH
 - Intel® QM77
- ◆ Memory
 - Two 204-pin 1066/1333/1600 MHz dual-channel DDR3 SO-DIMMs supported (system max. 16GB)
- ◆ BIOS
 - UEFI BIOS
- ◆ Ethernet
 - Intel® 82583V PCIe controller
 - Intel® 82579 PHY with Intel® AMT 8.0 supported
- ◆ Graphics Engine
 - Supports DX11 and OpenGL 3.1
 - Full MPEG2, VC1, AVC Decode
- ◆ Display Output
 - DVI-I (VGA+DVI) integrated in the Intel® QM77 (up to 1920 x 1200 @60Hz)
 - 18/24-bit dual-channel LVDS support (up to 1920 x 1200 @60Hz)
 - Dual HDMI output supported (up to 1920 x 1200 @60Hz)
- ◆ Super I/O
 - Fintek F81866
- ◆ Embedded Controller
 - iWDD EC
- ◆ Audio
 - Realtek ALC662 HD codec
- ◆ I/O Interface
 - 2 x RS-232
 - 4 x USB 2.0
 - 1 x 6-pin header for KB/MS
 - 2 x SATA 3Gb/s and 2 x SATA 6Gb/s with RAID 0/1/5/10 support
- ◆ SMBus
 - 1 x 4-pin wafer
- ◆ TPM
 - 2 x 10-pin header
- ◆ Expansions
 - 1 x PCIe Mini card slot (compatible with mSATA device)
 - 1 x PCIe x16
- ◆ Watchdog Timer
 - Software programmable supports 1~255 sec. system reset
- ◆ Programmable I/O
 - 8-bit digital I/O
- ◆ Infrared Interface
 - 1 x 5-pin header
- ◆ Fan Connector
 - 1 x 4-pin CPU fan connector
 - 1 x 3-pin system fan connector
- ◆ Power Supply
 - Single voltage 12V DC input
 - 1 x internal 2x2-pin power connector
 - 1 x External 4-pin DIN DC jack
 - Supports AT/ATX mode
- ◆ Power Consumption
 - 12V@6.08A (2.3GHz Intel® Core™ i7-3610QE with two 1333 MHz 4GB DDR3 memory running 3DMark06 burn in)
- ◆ Operating Temperature
 - 10°C ~ 60°C
- ◆ Operating Humidity
 - 5% ~ 95%, non-condensing
- ◆ Dimensions
 - 170 mm x 170 mm
- ◆ Weight
 - GW: 900g/NW: 450g

Features

1. Mini-ITX SBC with Socket G2 for Intel® 22nm mobile Ivy Bridge processor
2. Dual-channel 1066/1333/1600MHz DDR3 SDRAM supports up to 16GB
3. HDMI 1.3 compliant, three independent displays supported
4. 3D micro-architecture enhancement supports DX11, OCL 1.1 and OGL 3.1
5. Rich media acceleration for hardware decoding and encoding acceleration
6. Intel® GbE LAN with Intel® AMT 8.0 supported
7. High speed I/O interface for PCIe Gen 3.0 add-on card, USB3.0 and SATA 6Gb/s supported

Dimensions (Unit: mm)

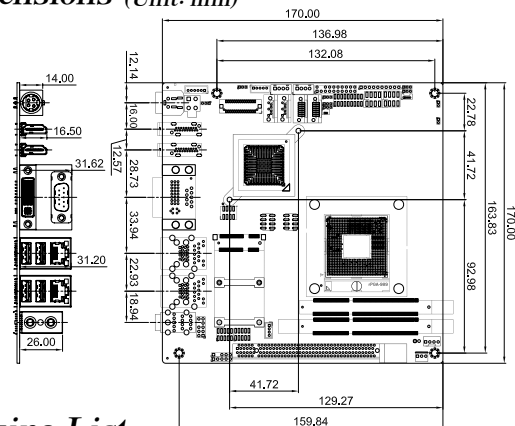

Packing List

1 x KINO-QM770 single board computer	
2 x SATA with power output cable (P/N: 32801-000100-100-RS)	
1 x RS-232 cable with bracket (P/N: 19800-000300-100-RS)	
1 x I/O shielding (P/N: 45014-0037C0-00-RS)	1 x Mini jumper pack
1 x Utility CD	1 x QIG (Quick Installation Guide)

Ordering Information

Part No.	Description
KINO-QM770-R10	Mini-ITX SBC with Socket G2 for Intel® 22nm mobile CPU, DVI-I/dual HDMI/LVDS, dual PCIe GbE, USB 3.0, PCIe Mini, SATA 6Gb/s and Audio
19800-003100-200-RS	Dual USB cable
32000-023800-RS	KB/MS Y cable
SACF-KIT01-R10	SATA to CF converter board
CF-989A-RS-R12	CPU cooler for mobile socket-G (PGA988) up to 55W processor, copper, 60 x 60 x 27.6mm, RoHS
TPM-IN01-R11	20-pin Infineon TPM module, software management tool, firmware V3.17
32205-003800-100-RS	RS-422/485 cable with bracket
33200-000031-RS	DVI-I to VGA adapter connector

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.