


# PCL-818HD/HG

# PCL-818L

**100 kS/s, 12-bit, 16-ch ISA  
Multifunction Card**

**40 kS/s, 12-bit, 16-ch ISA  
Multifunction Card**

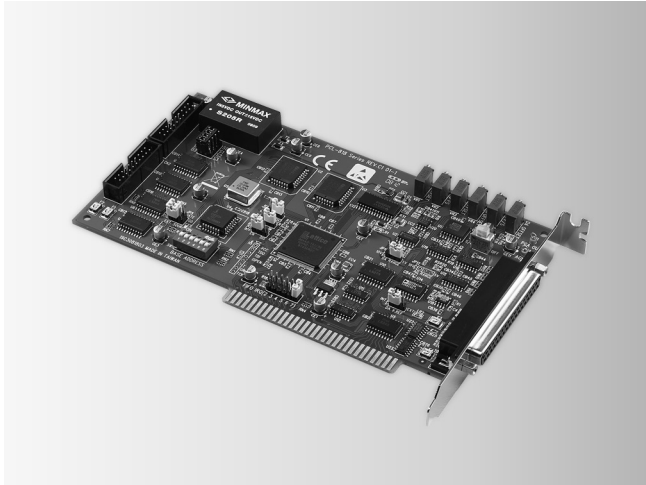

## Features

- 16-ch single-ended or 8-ch differential analog input
- 12-bit A/D converter, with up to 100 kHz sampling rate
- Programmable gain
- Automatic channel/gain scanning
- Onboard FIFO memory (1,024 samples, PCL-818HD/HG only)
- One 12-bit analog output channel
- 16-ch digital input and 16-ch digital output
- Onboard programmable counter

## Introduction

The PCL-818L series was designed for entry-level models to the PCL-818 series. The cards have been designed with the cost-sensitive customer in mind, but still offers the same functions as the rest of the series, except that they have a 40 kHz sampling rate and only accepts bipolar inputs. They are fully software and connector compatible with the PCL-818HD and PCL-818HG. This lets you upgrade your applications to these higher performance cards without hardware or software changes.

The PCL-818LS bundle consists of the PCL-818L card, the PCLD-8115 wiring terminal board and a DB37 cable assembly. The PCLD-8115 accommodates onboard passive signal conditioning components (resistors and capacitors), allowing you to easily implement a low-pass filter, a voltage attenuator or a 4 – 20 mA voltage converter.

## Specifications

### Analog Input

- **Channels** 16 single-ended / 8 differential
- **Resolution** 12 bits
- **Max. Sampling Rate** 100 kS/s for all input ranges (PCL-818HD/HG only)  
40 kS/s for all input ranges (PCL-818L only)
- **FIFO Size** 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 10 MΩ
- **Sampling Modes** Software, pacer or external
- **Input Range** (V, software programmable)

PCL-818L/818HD					
<b>Bipolar</b>	±10	±5	±2.5	±1.25	±0.625
<b>Unipolar*</b>	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
<b>Accuracy (% of FSR ±1LSB)</b>	0.1	0.1	0.2	0.2	0.4

\* Note: PCL-818L doesn't support unipolar input range.

PCL-818HG								
<b>Bipolar</b>	±10	±5	±1	±0.5	±0.1	±0.05	±0.01	±0.005
<b>Unipolar</b>	N/A	0 ~ 10	N/A	0 ~ 1	N/A	0 ~ 0.1	N/A	0 ~ 0.01
<b>Accuracy (% of FSR ±1LSB)</b>	0.1	0.1	0.2	0.2	0.4	0.4	0.8	0.8

### Analog Output

- **Channels** 1
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (V, software programmable)

<b>Internal Reference</b>	<b>Unipolar</b>	0 ~ 5, 0 ~ 10
<b>External Reference</b>		0 ~ 10, 0 ~ -10

### Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

### Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.4 V max.  
Logic 1: 2.4 V min.

- **Output Capability** Sink: 8 mA  
Source: -0.4 mA

### Timer/Counter

- **Channels** 1
- **A/D Pacer** 32-bit with 10 MHz or 1 MHz time base
- **Max. and Min. Rates** 2.5 MHz and 0.00023 Hz
- **Counter** One 16-bit counter with 100 kHz time base

### General

- **Power Consumption** 5 V @ 210 mA typical, 500 mA max.  
12 V @ 20 mA typical, 100 mA max.  
-12 V @ 20 mA typical, 40 mA max.
- **I/O Connector** 1 x DB37 female connector  
2 x 20-pin box header
- **Dimensions (L x H)** 155 x 100 mm (6.1" x 3.9")
- **Operating Temperature** 0 ~ 50° C (32 ~ 122° F)
- **Storage Temperature** -20 ~ 65° C (-4 ~ 149° F)
- **Operating Humidity** 5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)

## Ordering Information

- **PCL-818HD** High-performance Half-size Multifunction Card
- **PCL-818HG** High-performance and High-gain Multi. Card
- **PCL-818L** Low-cost High-perform. Half-size Multi. Card
- **PCL-818LS** PCL-818L w/ PCLD-8115 and DB37 Cable

### Accessories

- **PCL-10137-1** DB37 Cable, 1 m
- **PCL-10137-2** DB37 Cable, 2 m
- **PCL-10137-3** DB37 Cable, 3 m
- **PCL-10120-1** 20-pin Flat Cable, 1 m
- **PCL-10120-2** 20-pin Flat Cable, 2 m
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **PCLD-8115** Wiring Board w/ CJC Circuit & One DB37 Cable
- **PCLD-880** Wiring Board w/ Two 20-pin Flat Cables & Adapter

## Pin Assignments

CN1			CN2			
D/O 0	1	2	D/O 1	D/I 0	1	2
D/O 2	3	4	D/O 3	D/I 2	3	4
D/O 4	5	6	D/O 5	D/I 4	5	6
D/O 6	7	8	D/O 7	D/I 6	7	8
D/O 8	9	10	D/O 9	D/I 8	9	10
D/O 10	11	12	D/O 11	D/I 10	11	12
D/O 12	13	14	D/O 13	D/I 12	13	14
D/O 14	15	16	D/O 15	D/I 14	15	16
D.GND	17	18	D.GND	D.GND	17	18
+5 V	19	20	+12 V	+5 V	19	20

### CN3 (Single ended)

A/D S0	1	20	A/D S8
A/D S1	2	21	A/D S9
A/D S2	3	22	A/D S10
A/D S3	4	23	A/D S11
A/D S4	5	24	A/D S12
A/D S5	6	25	A/D S13
A/D S6	7	26	A/D S14
A/D S7	8	27	A/D S15
A.GND	9	28	A.GND
A.GND	10	29	A.GND
VREF	11	30	DA0.OUT
S0*	12	31	DA0.VREF
+12 V	13	32	S1*
S2*	14	33	S3*
D.GND	15	34	D.GND
NC	16	35	EXT.TRIG
Counter	17	36	Counter 0
Counter	18	37	PACER
+5 V	19		

### CN3 (Differential)

A/D H0	1	20	A/D L0
A/D H1	2	21	A/D L1
A/D H2	3	22	A/D L2
A/D H3	4	23	A/D L3
A/D H4	5	24	A/D L4
A/D H5	6	25	A/D L5
A/D H6	7	26	A/D L6
A/D H7	8	27	A/D L7
A.GND	9	28	A.GND
A.GND	10	29	A.GND
VREF	11	30	DA0.OUT
S0*	12	31	DA0.VREF
+12 V	13	32	S1*
S2*	14	33	S3*
D.GND	15	34	D.GND
NC	16	35	EXT.TRIG
Counter	17	36	Counter 0
Counter	18	37	PACER
+5 V	19		

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.