

# PCI-1752U


# PCI-1754

# PCI-1756

## 64-ch Isolated Digital Output Universal PCI Card

## 64-ch Isolated Digital Input PCI Card

## 64-ch Isolated Digital I/O PCI Card

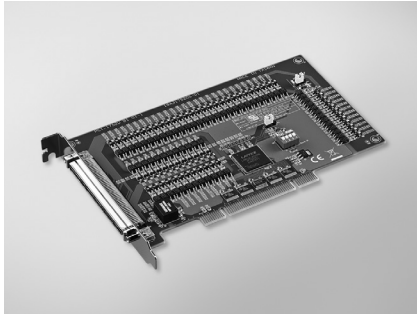

PCI-1752U

FCC CE RoHS

### Features

- 64 isolated digital output channels
- High-voltage isolation on output channels (2,500 V<sub>DC</sub>)
- Wide output range (5 ~ 40 V<sub>DC</sub>)
- High-sink current on isolated output channels (200 mA max./channel)
- Output status readback
- Keeps the output settings and values after system hot reset
- Channel-freeze function
- High-density 100-pin SCSI connector

### Specifications

#### Isolated Digital Output

- Channels** 64 (16-ch/group)
- Output Type** Sink (NPN)
- Isolation Protection** 2,500 V<sub>DC</sub>
- Output Voltage** 5 ~ 40 V<sub>DC</sub>
- Sink Current** 200 mA max./channel
- Opto-isolator Response** 100 μs

#### General


- Bus Type** Universal PCI V2.2
- I/O Connectors** 1 x 100-pin SCSI female connector
- Dimensions (L x H)** 175 x 100mm (6.9" x 3.9")
- Power Consumption** Typical: 5 V @ 230 mA  
Max.: 5 V @ 500 mA
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity** 5 ~ 95%, RH non-condensing

### Ordering Information

- PCI-1752U** 64-ch Isolated Digital Output Universal PCI Card

#### Accessories

- PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators

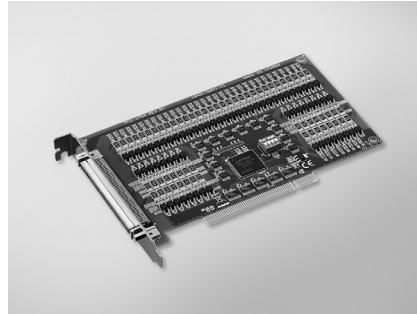

PCI-1754

FCC CE RoHS

### Features

- 64 isolated digital input channels
- Either ± voltage input for DI by group
- High-voltage isolation on input channels (2,500 V<sub>DC</sub>)
- High over-voltage protection (70 V<sub>DC</sub>)
- Wide input range (10 ~ 50 V<sub>DC</sub>)
- 2,000 V<sub>DC</sub> ESD protection
- Interrupt handling capability
- High-density 100-pin SCSI connector

### Specifications

#### Isolated Digital Input

- Channels** 64 (16-ch/group)
- Input Voltage** Logic 0: 3 V max.  
Logic 1: 10 V min. (50 V max.)
- Input Current (Typical)** 10 V<sub>DC</sub> @ 1.7 mA  
12 V<sub>DC</sub> @ 2.1 mA  
24 V<sub>DC</sub> @ 4.4 mA  
48 V<sub>DC</sub> @ 9.0 mA  
50 V<sub>DC</sub> @ 9.4 mA
- Interrupt Capable Ch.** 4 (ID10, ID116, ID132, ID148)
- Isolation Protection** 2,500 V<sub>DC</sub>
- Overvoltage Protection** 70 V<sub>DC</sub>
- ESD** 2,000 V<sub>DC</sub>
- Opto-isolator Response** 100 μs

#### General


- Bus Type** PCI V2.2
- I/O Connectors** 1 x 100-pin SCSI female connector
- Dimensions (L x H)** 175 x 100mm (6.9" x 3.9")
- Power Consumption** Typical: 5 V @ 340 mA  
Max.: 5 V @ 450 mA
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- PCI-1754** 64-ch Isolated Digital Input PCI Card

#### Accessories

- PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators

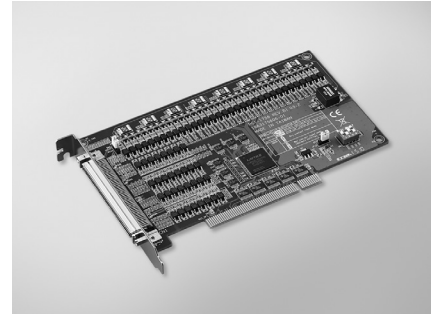

PCI-1756

FCC CE RoHS

### Features

- Either ± voltage input for DI by group
- High-voltage isolation input/output channels (2,500 V<sub>DC</sub>)
- 2,000 V<sub>DC</sub> ESD protection for DI
- High over-voltage protection (70 V<sub>DC</sub>) for DI
- High-sink current on isolated output channels (200 mA max./channel)
- Output status readback
- Keeps output settings/ values after system hot reset
- Interrupt handling capability
- High-density 100-pin SCSI connector

### Specifications

#### Isolated Digital Input

- Channels** 32 (16-ch/group)
- Input Voltage** Logic 0: 3 V max.  
Logic 1: 10 V min. (50 V max.)
- Interrupt Capable Ch.** 2 (ID10, ID116)
- Isolation Protection** 2,500 V<sub>DC</sub>
- Overvoltage Protection** 70 V<sub>DC</sub>
- Opto-isolator Response** 100 μs
- Input Current** 10 V<sub>DC</sub> @ 1.7 mA  
12 V<sub>DC</sub> @ 2.1 mA  
24 V<sub>DC</sub> @ 4.4 mA  
48 V<sub>DC</sub> @ 9.0 mA  
50 V<sub>DC</sub> @ 9.4 mA

#### Isolated Digital Output

- Channels** 32 (16-ch/group)
- Output Type** Sink (NPN)
- Isolation Protection** 2,500 V<sub>DC</sub>
- Output Voltage** 5 ~ 40 V<sub>DC</sub>
- Sink Current** 200 mA max./channel
- Opto-isolator Response** 100 μs

#### General

- Bus Type** PCI V2.2
- I/O Connectors** 1 x 100-pin SCSI female connector
- Dimensions (L x H)** 175 x 100mm (6.9" x 3.9")
- Power Consumption** Typical: 5 V @ 285 mA  
Max.: 5 V @ 475 mA
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity** 5 ~ 95%, non-condensing

### Ordering Information

- PCI-1756** 64-ch Isolated Digital I/O PCI Card

#### Accessories

- PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.