


# PCIE-2410/ PCIE-2420

## Single/Dual Port Fiber 100GbE PCIe Adapter with Mellanox® ConnectX-5 Ethernet Controller

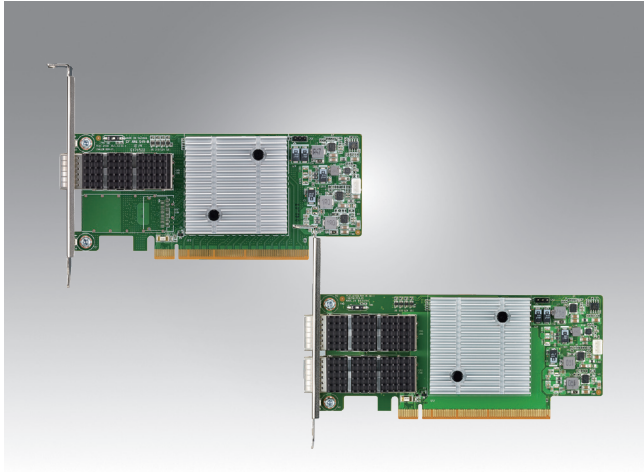

### Features

- Mellanox® ConnectX-5 Controller
- 1 or 2 100GbE QSFP28 ports
- PCIe Gen.3/4 x16 host interface
- Low profile (half length) form factors
- Supports 100GBASE-SR4 and 100GBASE-LR4 modules
- Supports SR-IOV based virtualization



### Introduction

Advantech's PCIE-2410/PCIE-2420 is a low-profile single/dual port 100GbE PCIe adapter based on the Mellanox® ConnectX-5 Ethernet Controller that supports both PCIe gen. 3 and gen. 4. When connected to a host over a PCIe gen. 4 x16 interface, the adapter provides sufficient bandwidth for line rate traffic on both 100GbE ports. Two QSFP28 ports can be configured to support a variety of optical transceivers, such as 100GBASE-SR4 and 100GBASE-LR4 optical modules, as well as directly attached cables and active optical cables.

Improved support for virtualization, including SR-IOV, Guaranteed QoS for VMs and Open VSwitch offload, makes the PCIE-2410/PCIE-2420 a perfect fit for virtualized environments and applications with network overlays. Packet filtering, load balancing and protocol offload capabilities further enhance efficiency by saving valuable processing time on the host. PCIE-2410/PCIE-2420 is an ideal network interface solution for multi-tenant environments and network function virtualization, as well as networking applications such as WAN optimization and network security.

### Specifications

Controller	Controller	Mellanox ConnectX-5
	Physical Functions	16
	Virtual Functions	1K
Ethernet	PCI Express Lanes	x16
	Speed	Gen 3/4
	Port Number	1 or 2
	Ports	100GbE QSFP28
Networking	LAN Bypass	Not supported
Power	Voltage	+12V
	Watts	17W
Mechanical Design	Board Dimension (D x W)	167 x 68.9 mm
	Bracket	Full height and half height options available
Environment	Operating Humidity	0 to 90% (non-condensing)
	Operating Temperature	0 ~ 45 °C (32 ~ 113 °F)
	Storage	-40 ~ 65 °C (-40 ~ 149 °F)
Certification	EMC	CE/FCC Class B
Compatibility	OS Version	Win2012R2 / Win 2016 / CentOS Linux release 7.5

### Ordering Information

Part Number	Description
PCIE-2410NP-00B1E	Single port 100GbE fiber (QSFP28) NIC with Mellanox CX-5 controller, PCIe gen. 3 x16
PCIE-2420NP-00B1E	Dual port 100GbE fiber (QSFP28) NIC with Mellanox CX-5 controller, PCIe gen. 3 x16
PCIE-2420NP-10B1E	Dual port 100GbE fiber (QSFP28) NIC with Mellanox CX-5 controller, PCIe gen. 4 x16

Please contact your Advantech representative for a list of supported and validated transceiver modules.

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.