


12.1" GS65 Panel PC

R12FA3S-GSM2

Features

- 12.1" 1024 x 768 Resolution with Projected Capacitive Multi-Touch (P-CAP)
- Freescale Cortex A9 i.MX6 Dual Core 1GHz (Optional Quad Core)
- Fanless cooling system and ultra-low power consumption
- Onboard LPDDR3 1GB
- Onboard 16GB eMMC Flash
- Full IP65
- 1 x LAN, 1 x RS232, 1 x USB, 1 x USB OTG, 1 x Console, 1 x Micro SD

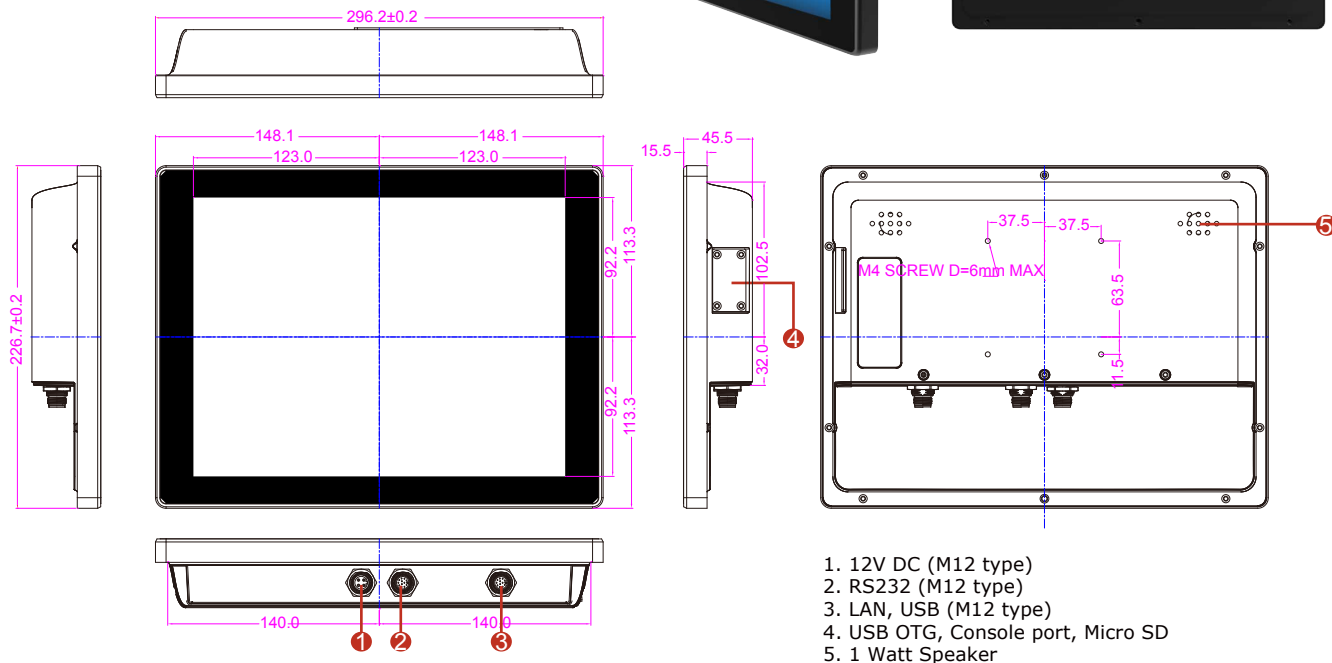

Specifications

System

- Processor : Freescale Cortex A9 i.MX6 Dual Core 1GHz (Optional Quad Core)
- Memory : 1GB LPDDR3 (Optional 2GB)
- Storage : Onboard 16GB eMMC Flash

Input / Output

- COM port : 1 x RS232 (M12 type)(Optional 422/485)
- USB Ports : 1 x USB 2.0 (M12 type), 1 x USB OTG (On side)
- Ethernet : 1 x 10/100/1000 LAN (M12 type)
- Speaker : 1 x 1 Watt Speaker
- Console : 1 x Console port (Linux Use)
- SD Slot : 1 x Micro SD Card Slot

OS/BSP Driver Support

- Operation System : Android 6.0 (Default)
 Linux Kernel 4.1.15, QT 5.5 Browser (Optional)
 Ubuntu 16.04 (Optional)

Mechanical Specifications

- Cooling System : Fanless design
- Mounting : VESA Mount (75x75mm), Panel Mount
- Dimensions(W x H x D) : 226.7 x 296.2 x 45.5 (mm)

Display

- Size : 12.1" TFT
- Resolution : 1024 x 768
- Brightness : 500nits (typ.) Optional for High Brightness 1000 cd/m (typ.)
- Contrast Ratio : 1000:1
- Viewing angle : -89~89(H) ; -89~89(V)
- Max color : 16.2M
- Touch : Projective-Capacitive Touch with optional protection glass

Power Considerations

- Power Input : 12V DC (M12 type)
- Power Consumption : 15W

Environment Considerations

- Operating Temperature : -15 deg. C to 55 deg. C
- Operating Humidity : 10% to 95% (non-condensing)
- IP Rating : Full IP65
- Shock Operating : 40g for 11ms
- Vibration Operating : 1.48/1.98/2.24 g rms for XYZ/ 5-500Hz

Certifications & Standards

- Compliant with MIL-STD-810F/G for vibration / shock, CE, FCC




12.1" GS65 Panel PC


R12FA3S-GSM2

Pin Assignment of cables

RS-232 to M12 Cable

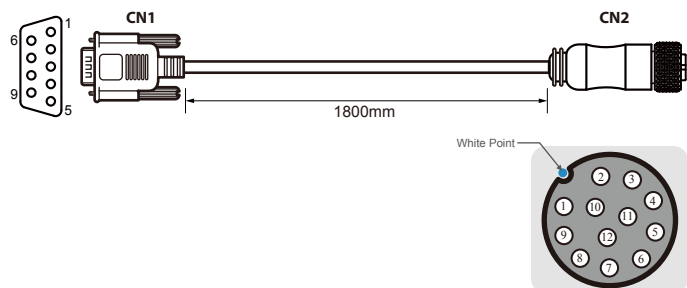


Pin No.	Symbols	Color
CN1-1	DCD	Green
CN1-6	DSR	Brown
CN1-2	RXD	Red
CN1-7	RTS	Orange
CN1-3	TXD	Blue
CN1-8	CTS	White
CN1-4	DTR	Purple
CN1-9	RI	Yellow
CN1-5	GND	Black




Pin No.	Symbols	Color
CN2-1	DCD	Green
CN2-2	DSR	Brown
CN2-3	RXD	Red
CN2-4	RTS	Orange
CN2-5	TXD	Blue
CN2-6	CTS	White
CN2-7	DTR	Purple
CN2-8	RI	Yellow
CN2-9	GND	Black

DC Power to M12 Cable

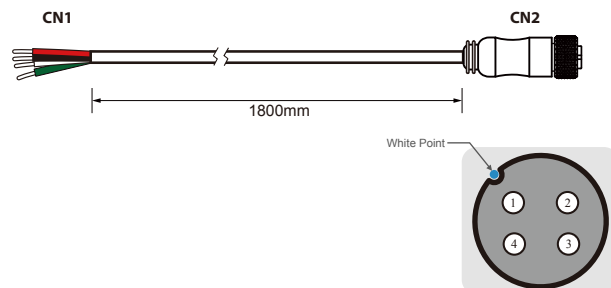


Pin No.	Symbols	Color
CN1-1	VIN+	Red
CN1-2	VIN-	Black
CN1-3	VIN-	White
CN1-4	NC	Green




Pin No.	Symbols	Color
CN2-1	VIN+	Red
CN2-2	VIN-	Black
CN2-3	VIN-	White
CN2-4	NC	Green

USB 2.0 & GIGA LAN to M12 Cable

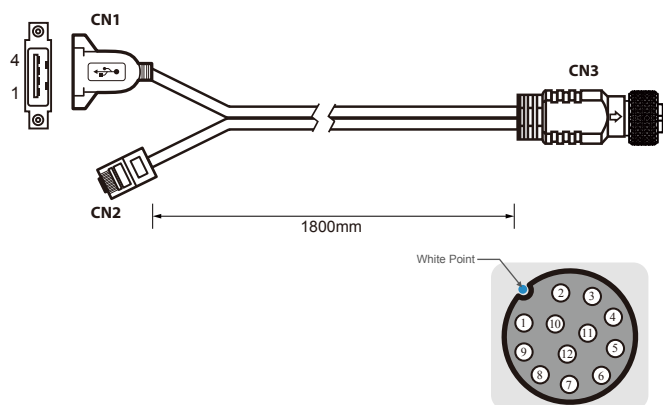

Pin No.	Symbols	Color
CN3-1	VCC	RED
CN3-2	D-	WHITE
CN3-3	D+	GREEN
CN3-4	GND	BLACK
CN3-5	White/Orange	
CN3-6	Orange	
CN3-7	White/Green	
CN3-8	Blue	
CN3-9	White/Blue	
CN3-10	Green	
CN3-11	White/Brown	
CN3-12	Brown	



Pin No.	Symbols	Color
CN1-1	VCC	RED
CN1-2	D-	WHITE
CN1-3	D+	GREEN
CN1-4	GND	BLACK
CN2-1	White/Orange	
CN2-2	Orange	
CN2-3	White/Green	
CN2-4	Blue	
CN2-5	White/Blue	
CN2-6	Green	
CN2-7	White/Brown	
CN2-8	Brown	

Twisted pairs
Twisted pairs
Twisted pairs
Twisted pairs
Twisted pairs

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.